




INR – the large filter capacity is achieved by a multistage filter combination

- With integrated preliminary separator.
- Also designed to handle oil or emulsion mist.
- Different fans are possible depending on the application.
- INR can be easily installed anywhere since the filtered air remains in the room – this dispenses with installation of waste air ducts, minimises costs and increases health safety and environmental protection.
- INR can be dismantled without tools for transportation.

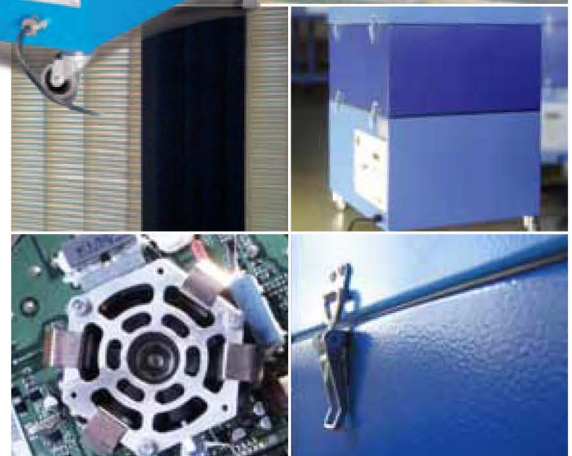

Extraction unit	A	B	C	D	E	F	H
INRTW270	100–320	12500	230/50–60	1,20	59	680x590x970	Display
INRTW540	100–640	12500	230/50–60	2,40	65	680x590x970	Display
INRM0810	810	2200	400V/50	0,55	58	680x590x970	Display

A Air Volume max. (m³/h) D Power Input (kW) G Weight w/o Filters (kg)
 B Vacuum max. (Pa) E Sound Pressure Level 1m (dBA) H Control Board (LED/Display)
 C Supply Voltage (V/Hz) F Dimensions (mm)

Applications:

- Marking and engraving lasers
- Cutting and welding lasers
- Soldering and welding fumes
- Fine particles/fumes
- Solvents and adhesive vapours
- Oil mist, emulsion mist