1

Brochure No. 1

Flow Sensors

Special-Sensors for Automation

E10323

Flow Sensors

Contents

Technique and application for flow sensors

Technique and application for flow sensors, amplifiers and compact models **1.3 - 1.7**
Terminology / Setting instructions **1.8 - 1.10**
Detection of microflow impulses **1.10 - 1.11**
Technique and application for flow sensors inline-digital display **1.11 - 1.12**
Ex area certification / Notes on safety applications **1.12 - 1.13**
Technique and application IO-Link, sensors with IO-Link **1.14 - 1.18**

Flow sensors Series 400 / Series 500 / Series 5000

Probes Series ST 400 / STK 400 **1.20 - 1.23**
Probes high temperature 120 °C/160 °C Series ST 400 / ST 500 / ST 5000 **1.24 - 1.26**
Probes chemical resistant Series STA 400 **1.27**
Compact models Series SC 440 / SCS 440 **1.28 - 1.29**
Compact models Series SNS 450 / SN 450 **1.30 - 1.34**
Compact models with analog output Series SNS 450 / SN 450 **1.35 - 1.36**
Compact models with two switching points Series SN 450 **1.37**
Compact models with temperature controll Series SNT 450 **1.38 - 1.40**
Compact models with turn on/off delay Series SN 450 **1.41**
Inline-Sensor Series SD 500 / SD 5000 **1.42 - 1.43**
Inline-Compact Series SDN 500 / SDNC 503 / SDNC 500 with IO-Link **1.44 - 1.52**
Special-Probe Food / Pharma Series SCB 450 / STB 450 / STC 425 **1.53**
Inline-Compact Series SDB 500 / SDN 500 **1.54 - 1.55**

Flow sensors with digital display Series SDN 552 / SDV 550 / SDI 850

Compact model with digital display Series SNS 552 with IO-Link **1.56**
Inline-Compact with digital display Series SDN 552 / SDN 554 **1.57 - 1.61**
Magnetic flowmeter with digital display Series SDI 852 / SDI 853 **1.62 - 1.63**

Air flow sensors Series 400 / Series 500 / Series 1000

Probes Series LTZ 421 **1.64**
Compact models Series LN 520 / LG 518 **1.65**
Compact models with IO-Link Series LN 520 / LG 518 **1.66**
Compact models screw-on mounting Series LNZ 450 **1.67 - 1.69**
Compact models sleeve mounting Series LN 450 **1.70 - 1.72**
Inline-Compact air flow Series LDN 510 **1.73**
Air flow sensor with IO-Link Series LDN 1000 **1.74**

Amplifiers for sensors

Amplifiers Series SKM 420 / SKM 520 / SKM 552 / SKZ 400 **1.75 - 1.79**

Flow sensors, air flow sensors and amplifiers for Ex-applications

Ex-Probes Series STS / ST ñ Category 1 / Category 2 **1.82 - 1.91**
Ex-Probes Series STS / ST ñ Category 1 / Category 2 with flange **1.92 - 1.95**
Ex-Probes Series STSEX ñ Category 1 with terminal clamps **1.96**
Air flow Ex-Probes Series STS ñ Category 1 / Category 2 **1.97 - 1.99**
Amplifiers Series SZAb 400 **1.100 - 1.101**
Air flow sensors Compact models Series LC 518 / LC 521 ñ Category 3 **1.102 - 1.105**

Accessories

IO-Link Converter **1.106**
IO-Link Master **1.107**
M12 connector / Cable **1.108 - 1.110**
Assembly parts **1.111 - 1.112**

Technical alterations are reserved to us without prior announcement.

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Flow Sensors

Technique & Application

Function

The function of the flow controller is based on the thermodynamic principle. The sensor is heated internally a few degrees °C compared to the medium into which it projects. When the medium flows, the heat generated in the sensor is conducted away by the medium, i. e. the sensor cools down. The temperature within the sensor is measured and compared to the temperature of the medium. The state of flow can be derived for each medium by the temperature difference attained.

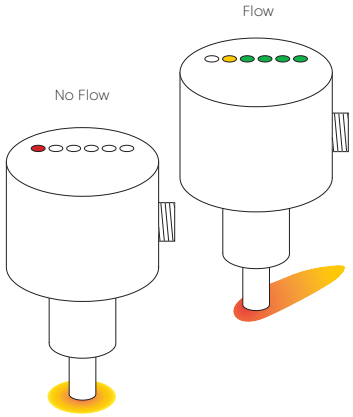

Function of thermodynamic flow controllers

On the basis of this functional principle EGE manufactures flow monitors for liquid and gaseous media.

The sensitivity of thermodynamic flow monitors depends on the thermal characteristics of a medium. The detection range of a standard sensor for oil, for example, is three times as great than for water and for air is approx. 30 times greater than for water due to the reduced heat conductivity. Unless stated otherwise, the technical sensor data are specified for water.

Areas of application for flow monitors

Thermodynamic flow monitors function without any moving parts, therefore they are not subject to failure due to corroded bearings, torn impellers or deflector deformation. This reliability is highly valued in many industries. Today, flow monitors are used both in liquids and in air, and are employed even in explosion hazardous environments.

Monitoring of cooling

- The cooling water on welding machinery is monitored using compact stainless steel devices. This ensures sufficient cooling even for rapid cycles, otherwise the welding robot will be switched off by the sensor.
- The cooling lubricant flow is monitored continuously in processing centres. The tools are protected and have a greater service life.
- In metal processing, e.g. rolling mills and wire drawing machines, the rolls and coils will be cooled continually. This is monitored by thermodynamic sensors. Due to the rough environmental conditions the sensors are designed for up to 160 °C and settings are made away from the heat with special amplifiers.

Monitoring of flow medium

- The run-dry protection of pumps is a frequent application, which often uses compact sensors with time delay.
- In dosing technology the aggregate, usually small flow quantities, is measured exactly by means of inline sensors. These sensors are inserted like a pipe into the line.
- Monitoring of filters and sieves can be ensured by medium flow control; if the flow is progressively reduced, the filter must be renewed. Where this is not carried out, the pump is switched off in a second stage should the medium flow drop further. This uses a sensor with two switching points.

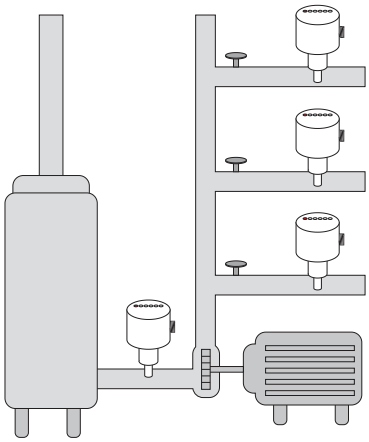

Run-dry protection of a feed pump

Monitoring of process flow

- The monitoring of cleaning processes using aggressive media at times is often only possible with special materials, e.g. hastelloy or tantalum.
- Extraction systems for hazardous vapours at laboratory workstations as well as the hall ventilation in the hexane processing industry are monitored using airflow sensors.
- CIP/SIP processes can be monitored and documented with flow monitors.

Flow Sensors

Technique & Application

Probes

The temperature-sensitive measuring elements are fitted in the tip of the probe. The probe tip and the adjoining thread/mounting part are made in one piece of stainless steel in many probes. This guarantees absolute tightness and high compressive strength. Special materials are used in corrosive, and particularly in oxidizing media, since stainless steel shows only limited resistance to corrosion in this application. In standard applications, probes can be mounted independently of the direction of flow of the medium. In any case, it is important to make sure that the pin of probe is completely surrounded by the medium to be monitored. Please note that for smaller cross-sections the sensor tip narrows the tube© cross-section. This results in a higher flow rate.

In order to avoid malfunctions caused by unstable flow patterns no fittings that could affect the flow cross-section or the flow direction should be placed directly in front of and behind the sensor. The point of reference for the input/outlet section is approximately 5 to 10 times the tube diameter.

Assembly

Probes with short thread-pieces of the STK... type are particulary suited for fitting into T-pieces. Sensor length is designed in such a way that the probe tip is completely immersed in the medium without touching the opposite side.

Probes with long thread-pieces of the ST... type are suitable for larger pipe diameters or for use with longer assembly thread-pieces. Probes threads are G-pipe threads to DIN ISO 228 and also comply with the BSP standard. A flat gasket centered by a step on the sensor ensures a good seal. A good seal can also be ensured using Teflon tape. For pressure above 30 bar or very high screw-down torques, a flat gasket may be damaged, especially if it is made of plastic. In this case, a recess must be incorporated into the fitting which will keep the gasket in the right position in the case of high loads.

PTFE gaskets must always be used with this technique. For high pressure applications, metal gaskets must be used. The standard material for gaskets is AFM 30/34. Special gaskets made of other materials such as moving iron, copper or PTFE are also available on request.

Dimensions of the gasket

Thread	d	D	h	t
G1/4	13.2	19.5	1.5	1
G1/2	21	27.5	2	1.5
G3/4	26.5	32.5	2	1.5



(1) Probe (2) Gasket (3) Chamber
(4) Edge (5) Counterpart

A rising pipe should be used in case of open systems or in the presence of air pockets (1). Deposits and air pockets do not impair sensor function in the case of lateral assembly (2), providing the sensor is completely immersed in the medium.

Assembly from below (3) assures flow monitoring function even if there are air pockets in the pipe. However, the monitored medium level must not fall below the upper edge of the measuring tip. Assembly from above is only applicable if there is no air in the pipe.

1. Installation in rising pipe



2. Lateral installation



3. Underside installation



EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Flow Sensors

Technique & Application

NPT threads
NPT threads can be provided as an alternative for all types which have a G1/2 or a G3/4 thread. NPT threads are conical and must be screwed into an equally conical counter-part. Two types of NPT threads must be distinguished. NPT thread according to ANSI B 1.20.1 does not ensure a good seal by itself and requires the use of a sealing medium, e.g. Teflon tape. It is not possible to use flat gaskets with this type of thread.

Flange types
Standardised pipe connections are required particularly in the chemical, pharmaceutical and foodstuff industries. Sensors for use in these areas are supplied with flange connections per DIN or ASME. Sensor and flange form a corrosion-proof connection using laser or inert gas shielded arc welding.

Food-approved screw connections
For hygienic reasons the food and pharmaceutical industries place special demands on the mechanical and electronic characteristics of sensors.

Probes with food-approved connections, e. g. Triclamp or dairy pipe connections (DIN 11851) comply with the 3-A sanitary standard 28-05. Due to the temperature changes involved, the usual cleaning cycles CIP and SIP place a particular demand on sensor electronics. Therefore, special protective measures are taken. Sensor materials for these applications is mainly the special steel AISI 316 L. Customer-specific connections, e. g. GEA-Varivent or APV flanges are available, as are other special metallic materials.

Extra long probes
Flow probes are available in screw lengths of 25 mm to 300 mm. The probe length should be selected such that the measuring tip is within an area of stable flow characteristics.

Main applications are:
- detection of small flow velocities in pipes with large cross section
- mounting of the sensor with a standard flange
- use of extra long welding sleeves if the piping is surrounded by a supplementary insulation.

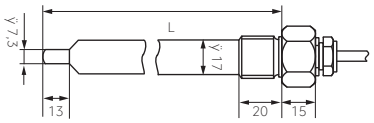

Long sensor

Immersion depth "L" is determined by the distance between the sealing face and the sensor tip. Standard lengths which can be supplied are: L = 80 and 120 mm; in the Ex-area 80, 110 and 140 mm.

Inline
Inline sensors are inserted directly into the line of a pipe. This design does not feature any measuring pins protruding into the flow. EGE inline sensors SD of series 500 are suitable for flow volumes from 0.5 ml/min to 6 l/min. These sensors excel through smooth measuring pipes, low pressure loss and fast response to flow changes. A multitude of connection options are available.

Chemical stability of probe housings
The chemical stability of the materials used must be verified individually for every application. Basically, no problems occur if the probe and the piping are made of the same material. It is always advantageous if the sensor housing is made of a more noble material than the piping.

The screwed cable gland on the rear side of the ST... sensors is designed in nickelplated brass. Order material PVDF for screwed cable glands in applications that are cleaned with alkaline cleaning agents as is the case, for example, in the food industry.

Stainless Steel belongs to the group of chromium-nickel alloys containing further components such as molybdenum or titanium. The proportions of the different alloy components is critical to the resistance to corrosion in the medium. For this reason, there exists a large number of materials identified by numbers to the DIN EN ISO 7153-1:2000 standard. Due to its good corrosive resistance in many areas of application, AISI-316 Ti (VA4) stainless steel is a frequently used material.

It may be used in installations used to obtain water, in air conditioning systems, in food processing industries such as dairy products, meat products, beverages, wine production or in kitchen installations. Stainless steels have a restricted stability in chlorinated or poorly oxygenated atmospheres. Special alloys must be used for such applications.

Flow Sensors

Technique & Application

Special materials

Hastelloy B-2 (2.4617) belongs to the group of highly corrosion-resistant nickel-molybdenum alloys.
This material has excellent characteristics in reducing media, e.g. in hydrochloric acid of any concentration and for a large range of temperatures. It can also be used in hydrochloric, sulphuric, acetic and phosphoric acid media. Good resistance against corrosion such as pitting, crevice corrosion, chlorine induced stress, corrosion cracking, hair-line corrosion, abrasion and corrosion within the heat influence zone allows for a large range of applications. In the presence of oxidising components such as iron or copper salts, the use of this material is not recommended.
Hastelloy C-22 (2.4602) belongs to the group of high corrosion-resistance nickel-chromium-molybdenum-tungsten alloys. The material is characterised through high resistance against crevice corrosion, pitting and stress corrosion cracking in oxidising and reducing media. It also displays good behavior in the presence of a large number of corrosive media, including strong oxidants such as iron (III) chloride and copper (II) chloride, hot media, e.g. sulphuric acid, nitric acid, phosphoric acid, chlorine (dry), formic acid and acetic acid. Furthermore, it has satisfactory characteristics in humid chlorine gas, as well as in sodium hypochlorite and chlorine dioxide solutions.

Titanium (3.7035) is a light metal with mechanical strength values equivalent to those of high quality steel. The good chemical resistance of this metal is due to the fact that an oxide film is formed on its surface, as is also the case with stainless steels. If this protective layer undergoes mechanical damages in an oxygenated enviroment, it is immediately renewed (titanium will resist even aqua regia). Titanium is not stable in environments containing no oxygen or in reducing enviroments. It is particularly suitable for applications in chloride-containing media. Experience in the chemical industry and in paper bleaching factories has shown that titanium is the only material allowing undisturbed production. The excellent characteristics of titanium also give optimum results in sea water cooling sytems and sea water de-salinising plants.

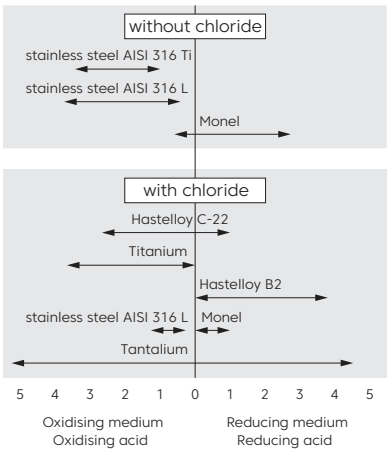

The material is particularly suited for the application of coating with other metals and metal ceramics. These supplementary coatings noticeably increase its chemical stability and thus the lifetime of sensor housings.

High temperature

High temperature sensors are manufactured from temperature-resistant components and feature FEP cables. The functional range of these special probes of series 400 is specified as +10...+120 °C. Temporarily 135 °C is permissible for max. 10 min. High temperature sensors of series 500 can be used for media temperatures of up to 160 °C / 320 °F.

Connection

Flow monitoring probes are available with a M12 plug connector or fixed cable. Special models have a terminal compartment. The connection cable from the probe to the amplifier may be up to 100 m long. For distances above 30 m a shielded cable is preferred. In all cases the chosen wire strength must be checked against the requirements.

Chemical resistance of B3-coating

Medium	Cl_2	HCl (25%)	Br_2	HBr (20%)	F_2 (15%)	HF (15%)	HA (general)	NaOH	Salzw. (Kestern)	red. Medien	HNO_3 (30%)	H_2SO_4 (25%)
Resistance	+++	+++	+++	+++	+	+	+++	++	+++	++	++	+++

HA general = Acid. acid in different concentrations
Salzw. Kestern = Saltwater-Kesternich-Test
Resistance = proofed up to 30 °C

Coating properties
The coating is hard to wear and resistant to abrasive substances in media like for example chalk, mud, sand and fiber.

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Technique & Application

Amplifiers

All amplifiers have a multicolour LED display which visually indicates the flow tendency. If the LED light is red, the pre-installed limit value is not reached and the switching output is not activated. The yellow LED indicates that the limit value was reached and the output is active. In addition to the yellow LED, 4 more green LEDs can light up to indicate how much the limit value is exceeded.

For the installation of the amplifiers, make sure that the devices are not subject to heat build-up. The distance between adjacent devices should not exceed the value specified in the instruction manual.

Amplifiers SKZÖ and SKM...
The terminal rail devices SKZ... and SKM... are prepared for installation on the top hat rail. They evaluate the signals delivered by the measurement probes and provide relays or analog outputs. The settings are made using two potentiometers that are accessible from the front or via buttons for SKM 522. In addition, SKZ amplifiers provide a switch-off delay as well as temperature monitoring.

Ex amplifier SZAb...
For Ex measurement probes, the SZAb... amplifiers with relay or analog output are offered. They have an intrinsically safe circuit to which the measurement probe is connected. This safe circuit is galvanically isolated from the mains and the relay or analog output. The Ex amplifiers SZAb... must be set up outside of the hazardous area.

Compact devices

Compact devices integrate amplifier and probe within one housing. This permits setting a limit value directly at the measuring location. The cabling is thus reduced to the less interference-prone mains supply cables and the switching output.

Screw assembly
SC 440.../SN 450.../LN 450.../
LNZ 450...
Compact devices of the series mentioned can be easily assembled in screw adapters, bushings and T-pieces. To this end the measuring probes usually have a thread of size G1/4, G1/2 or NPT1/2. Many other options can be implemented as special device.
The devices of series SC 440... are completely manufactured from stainless steel and characterised by robustness and a small footprint. They have been proven in many years of industrial use. Series SN 450... and SNT 450... have a plastic (PBT) housing and are available in many designs for direct and alternating voltage supply, with relay, PNP or analogue output. The STN 450... variants additionally feature an adjustable temperature monitoring, the variants with ...-VA or ...-VE have an adjustable time delay for the output. The compact devices LN 450... and LNZ 450... are suitable for use in air. They are available in the same variants as SN 450...

SCS 440.../SNS 450...
plug-in assembly
The measuring probes of the above-mentioned device series have been designed for assembly in cutting ring fittings. They are secured in the respective fitting with a union nut attached to the device. The connection is reliably sealed up to 100 bar. Various designs of the screw-in adapter allow the universal use of the flow sensor. The variants of the compact devices match the variants available for screw assembly.

ì Inlineì assembly
SDN 500.../SDN 552.../SDNC 500...
"Inline" assembly is through two opposing process connections at the device directly in a pipe or hose. The measuring tubes of the inline sensors are smooth on the inside and do not feature any pins protruding into the flow. They are characterised by short response times and a large detection range. Due to their compact design they can also be used where installation space is tight. For pulsating flows the inline sensors SDN... -DYN are suitable, which can detect very brief flow rates of the smallest volumes as soon as the flow starts. The SDN 500... are equipped with PNP, relay or analogue outputs.

Sensors of the series SDNC... have a space-saving cubic design and opposing process connections with a G1/4 thread. They have a wide detection range and are sometimes operated with a screw-on pre-adapter or a straight inlet section providing a favourable flow profile for the flow rate detection.

This device series has been preconfigured at factory or can be supplied flexibly parametrisable using an IO link. This design also offers a pulse output for simple volume detection.

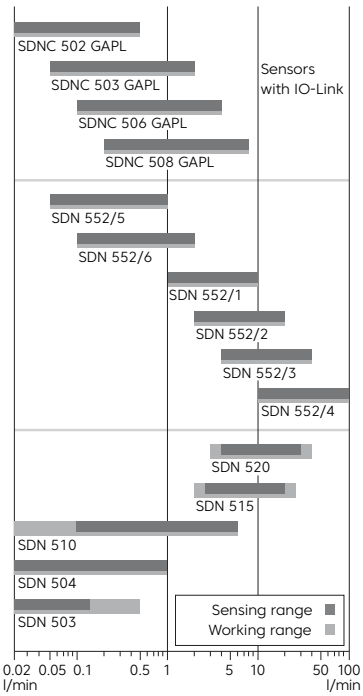

Flow ranges for EGE-Inline-Compact models

Technique & Application

Terminology

Detection range
The detection range of a probe or compact device indicates the flow velocities of the medium for which the probe can provide an analysable signal. If the medium is not specified, the details for water are applied. Because the different media have different thermal conductivity, the detection range as well as the temperature drift are also dependent of the respective medium.
At the upper and lower limit of the detection range, the temperature drift is higher. The detection range does not limit the maximum flow rate a sensor may be exposed to. Hence, a sensor with the upper detection limit set at 3 m/s can be operated at 10 m/s.

Operating range
The operating range characterises the section of the detection range for which the flow technology data have been specified. At the outer limits of the detection range these data are reduced. For sensors preconfigured at factory the working range represents the display or output range.

Nominal flow
For each sensor, data corresponding to its own nominal flow is measured. This is nessesary because response characteristic curves of sensors are non-linear. Consequently the various sensor characteristics depend on the location of the chosen operating point on the curve. As a rule, the nominal flow-point is set in the middle of the portion of the (simple logarithmic representation of the characteristic) curve which appears to be linear. For this operating point, the following values may be defined: switching on and off times, stand by time, hysteresis and temperature response.

Supply voltage
The supply voltage is the voltage range within EGE Sensors function safely. For direct current supplies it must be ensured that the limits are maintained even including residual ripple.

Current consumption
The current consumption is the maximum value of the idle current Io which the flow monitor draws without load.

Switching current
The switching current indicates the maximum continuous current for the switching output of the device. For PNP outputs this value applies to an ambient temperature of 25 °C. At higher temperatures the maximum switching current is reduced. For devices with relays output the value is related to the utility category AC-12 or DC-12 in accordance with EN 60947-5-1.

Switching voltage
The switching voltage indicates the maximum voltage (including residual ripple) to be switched with the relay output.

Switching power
The switching power indicates the maximum power to be placed on the output relays.

Ambient temperature
The ambient temperature indicates the maximum and minimum permissible temperatures for the sensor.

Temperature of medium
The temperature range for which a sensor is rated. Applies to the medium to be monitored.

Temperature gradient
The temperature gradient defines the maximum temperature change of a medium per time unit which a sensor can track without malfunction. It is a measure for the quality of a flow sensor. The temperature gradient is determined at nominal data and with symmetrical installation of the measuring probe.

Start-up time
The start-up time is the period of time required by the flow detector to reach a stable state after the operating voltage has been switched on. Prerequisite is that the medium flows at the rated velocity and that the sensor has adapted to the temperature of the medium before switching the supply voltage on. The start-up time is prolonged in a static medium and reduced if the medium flows faster than the rated value.

Reaction time
The reaction time combines the switch-on and -off time. Switch-on time elapses from the beginning of the flow until the switching point set at the amplifier is reached. Switch-off time characteristic results for the flow sensors at pump shut-down. If the set switching point is close to maximum flow, the time elapsing between the pump shut-down and the indication of the flow decrease is short. If the switching point is close to the static value, the off-transition time will be long.

Compressive strength
Pressure resistance relates to the sensor casing. Up to the indicated maximum pressure, the sensor provides a steady signal in fluids and the casing suffers no damage. In case the application requires the use of threaded joints, these can have compressive strengths that are significantly lower than the data for the sensor, which must then be observed.

Protection class
The protection class indicates how well the equipment is protected against ingress of solids and water in accordance with EN 60529. For probes, the stated protection class always refers to the connection area. The area which is in contact with the medium always has IP 68.

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Technique & Application

Terminology and Setting instructions

Switch-off delay
The variable time delay which can be set between 0 and 25 seconds becomes active during flow standstill (drop-out delay). If the medium ceases to flow and the amplifier display indicates this state, the relay contact is actuated only after the set delay. During the delay period the yellow LED lights up together with the red LED.

Cable break monitoring
Cable break monitoring shuts off the flow monitor output if no probe is connected or if the probe cable has been severed. In case of cable severing, "flow failure" signal is displayed. Cable break monitoring is available in the SKZ 400Ö The SKM 552Ö monitors each sensor cable for short circuit and cable break.

Switching output

General
- The output is active when the yellow LED is lit.
- Set the switching point with the potentiometer at the front of the device.
- Keep the flow rate and medium temperature stable during adjustment and wait for the temperature to equalise between the sensor and the medium.
- The flow rate must be within the detection rate of the measuring probe.
- If present, remove the protective screw M3 x 4 from the potentiometer opening for the duration of configuration.

Monitoring a flow limit for being exceeded
- Specify the flow rate or stop the flow and wait for the standby time.
- Turn the potentiometer screw clockwise until the yellow LED is lit.
- Turn the potentiometer screw counter-clockwise until the red LED is lit. The output is not active.
- Increase the flow rate. Monitor the LED displays and switching output. If the limit value is exceeded, the yellow LED is lit and the output is active. For a reliable monitoring the first green LED should also be lit after the flow commences. If necessary, change the adjustment.

This calibration is only possible if the flow rate of the medium is max. 70% of the limit value of the detection range of the selected measuring probe. If the red LED does not go out, the selected flow rate is too high or the hysteresis of the analysis device too great.

Monitoring a flow limit for being fallen below or standstill
- Turn the potentiometer screw counter-clockwise until the red LED is lit.
- Turn the potentiometer screw clockwise until the yellow and 2 green LEDs are lit. The switching output is active.
- Reduce the flow rate and monitor the LED displays and the switching output. If the yellow LED goes out, the output is deactivated.

The switching point for the flow rate is adjusted using one or two potentiometers. For flow rates which are higher than the detection limit of the measuring probe the loss or reduction of the flow rate is reported when the speed falls within the detection range of the measuring probe.

Limit temperature calibration
The desired value can be set (for devices with this option) with a potentiometer. The output switches when the set value is exceeded. At the same time the corresponding red LED at the device is also lit.

Time delay calibration
The desired value can be set with a potentiometer. In the SKM 522 the configuration takes place in the programming mode. The values are shown on a scale. If the red LED already indicates a loss of flow, the output remains switched until the time has expired. Then the yellow LED also goes out.

Automatic adjustment for SKM 522
Simultaneously pressing the two front buttons will open the programming menu. The automatic adjustment is selected with the FUNCTION button and started with the SELECT button. The adjustment is completed a few seconds later when at least the yellow LED lights up. Flow rate and temperature must be kept constant before and during the adjustment process. The function MAN. ADJUST can subsequently be used to manually modify the switching point.

LED functions flow

Red:
Flow has been interrupted or the flow rate has fallen below the specified value. The "flow" relay has dropped out.

Yellow:
The set flow rate has been reached, the "flow" relay pulls in.

Green:
The set flow rate has been exceeded. There is extra flow capacity.

LED temperature function

Red:
The set temperature value is reached and the "temperature" relay has pulled in.

LED time delay function

Yellow and Red:
Flow is below the set value. "Flow" relay remains pulled in until the set switch-off delay runs out.

Technique & Application

Setting instructions/Detection of microflow impulses

Analog output

Flow sensors with analog output supplies a current intensity which depends on the flow speed. The output current range is defined from 4 mA to 20 mA. The dependence between flow speed and output current is non-linear. The detection range is adjusted over two potentiometers: "Range" (◢) and "Adjust" (◢). The lowest value (>4 mA, 1st green LED) is set with the "Adjust" potentiometer at the smallest flow speed to be monitoring and the highest value (20 mA, 5th green LED) is set with the "Range" potentiometer at the highest flow speed to be monitored. The graph shows the characteristic lines obtained with the different settings.

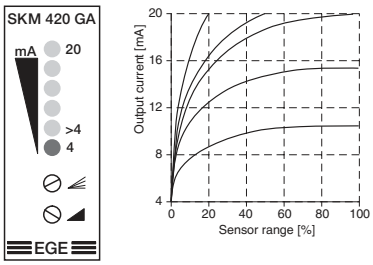

Detection of Microflow impulses

The SDN 50X/1 GSP-DYN is an in-line flow controller for monitoring pulsating flows. Unlike traditional monitoring devices which monitor compliance with a set limit in a continuous flow this particular flow controller detects when a liquid starts flowing. There are several parameters affecting the detection:

- the time it takes for the flow rate to change
- the time that the medium flows
- the time that the medium does not flow
- the magnitude at which the flow rate changes
- the specific properties of the medium

Optimal conditions for reliable detection are given in a highly thermally conductive medium which has not moved for several seconds and is then passed through the sensor in a sudden burst for a short period of time. Nearly ideal flow pulses are provided by dispensing systems and lubrication systems which use piston pumps. These deliver fluid media in jerks and meet most of the requirements for a reliable pulse detection. The lower limit primarily depends on the volume that is delivered; this should not be less than 0.02 ml within a period of 0.1 s.

Impact of pulse time and duration of interruption

Furthermore, the dynamic pulse detection is affected by the duration of the pulse, i. e. the time the medium flows through the sensor, and the duration of the interruption, i. e. the time the medium does not move. As a general rule, the shorter the pulses the longer the interruption. For very low flow volumes this behaviour is even more pronounced than for high flow rates. In general, the shortest possible pulse duration is approx. 100 ms, while the shortest possible interruption is approx. 300 ms.

Impact of the mediumís properties

All durations and volumes stated above depend on the heat transfer properties of the monitored medium. A medium with a relatively poor thermal conductivity, such as air, needs to flow through the sensor for a longer duration or with a higher speed. The shortest response times are achieved with water.

Temperature independent

Because of the dynamic measurement principle and irrespective of the mediumís temperature, no specific adjustment is required for the pulse detection even after changing the medium.

Sensitivity

In order to suppress minor flow pulses which may occur during operation due to hose movements etc. there is a potentiometer which can be used to reduce the actuation sensitivity (also referred to as threshold). The sensitivity should generally only be set to such levels that still ensure reliable pulse detection.

Extending the switching signal

A convenient additional feature is the easily accessible potentiometer on the front panel of the device which allows extending the switching signal generated by the analysis unit to a value of up to 10 seconds. If another pulse is detected during this period the delay time is restarted without releasing the switching output.

Air inside the piping

Knowing the environmental conditions is particularly important for very low flow rates to ensure reliable pulse detection.
Trapped air inside the line connecting the valve and the nozzle has a damping effect on the pulse as the air buffer absorbs the surges of the pump and relaxes when the valve is closed. This may cause a continuous flow which can no longer be detected by a dynamic flow controller. In this case, it is recommended to use a monitoring device for continuous flows.
As a general rule, the flow controller should be installed near the valve. This largely eliminates the effects described above.

Detection in both directions

Reverse flows may occur during operation if, for example, the pressure completely drops during a dosing application, which the device may take for pulses. Ways to prevent such reverse flows include the installation of check valves and constructional measures.

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Technique & Application

Detection of microflow impulses/Inline-Flow monitoring

Continuous switching signal
The adjustable output switching signal extension can be set to a time which is slightly above the duration of the pulse and the interruption. When a pulse is detected in this setting it will cause an output signal which is maintained until the extension time has elapsed. Any new pulse detected during this period will restart the interval. For the period of time during which the pulses are detected in regular succession the device will generate a continuous signal which is only reset if no additional flow pulses are detected.

Mounting position
As with all flow controllers the device should be mounted in a position which ensures that air can escape freely after the installation of the sensor. The preferred installation set-up would be a vertical pipe in which the medium moves upward.

Trapped air inside the medium
The sensor will detect an air pocket trapped inside the fluid as an interruption of flow which may cause a switching operation if the sensitivity is set high. However, such behaviour may be useful for certain applications.

Setting the sensitivity
After successful installation of the sensor, the power supply is switched on and the pulsating flow is started. The green LED on the device is lit. This indicates that the device is ready for operation. If the device does not immediately detect the pulses the signal extension should be set to minimum (turned counter-clockwise) and the sensitivity to maximum (turned clockwise). Once the pulse sequence falls within the detection limits the yellow LED will briefly flash each time a pulse a detected. It is now possible to slowly turn the sensitivity potentiometer counter-clockwise until the detection starts failing. When reaching this point, increase the sensitivity again until all pulses are detected.

Flow monitoring and measuring

The EGE-inline flow controllers with digital display monitor flow rates in the range of 0,05...100 l/min and display the flow rate digitally. They feature front panel buttons used to call functions and modify settings. The application area includes all areas of flow monitoring and measuring, in which a flow display is desired.

Series SDN 552/554 ñ thermal principle
The SDN 552/554 series is based on the thermodynamic principle, heat is created in a measuring pipe and absorbed by the passing medium. The dissipated heat quantity is a measurement for the flow speed. A microprocessor processes this data, calculates the flow rate quantity and displays the result in liters/minutes in a 3-digit, 7-segment display.
Page 1.57 - 1.61

Serie SDI 852/853 ñ magnetic-inductive
The inline flow sensors SDI 852/853 offer a monitoring function as well as precise flow measurements in the range of 0...80 l / min with a measured error smaller than 2%. The flow rate is digitally depicted using a clear 3-digit, 7-segment display. The magnetic-inductive measuring system facilitates that this device i suitable for many different applications in the field of automating processes and workflows. Furthermore, a high degree of measuring accuracy is ensured. The magnetic-inductive measuring principle requires the electrical conductivity of the medium. Low limit values of 15 µS/cm for water or 10 µS/cm for other fluids still offer a broad function range. The combination of precise measuring system and small, compact design distinguishes the series SDI from other inline flow sensors. They are easy to install subsequently into existing configurations or offer a space-saving alternative for new constructions. Cooling and temperature control as well as metering circuits, for example in the field of water treatment, are precisely and accurately monitored. This is accomplished with a set point function as well as an analogue linear current and pulse output.
Page 1.62 - 1.63

Technique & Application

Inline-Flow monitoring/Ex area

Installation
The inline flow sensors are installed "in-line" into a pipe line. The pipe may be connected directly with the compression tube fitting connection or with an adaptor SDA.... Threaded bushings are located in the bottom housing plate and are used to fasten the device to a support plate or other similar base. A mounting plate (optional accessory) may also be attached to the housing. This makes it possible to fasten the unit from the front.

Signal filter
The parameter for the signal filter allows inputting a value that determines the time interval in which the measuring signal is averaged. Inputs between 0 to 8 seconds are possible. A low value results in a very quick response; a high value results in a very steady display of the measured value. The filter is switched off when the setting is 0. Averaging has the same effect on display and outputs.

Access code
Protection against unauthorized access to the programming functions provides an access code. Without this number combination, only the currently saved values for the switching points and further parameters can be displayed.

Reference adjustment
The accuracy of the displayed flow rate quantity can be optimized with the CAL function using an exact reference flow rate meter. Here you have the option to modify the displayed flow rate value and adapt it to the reference value.

Medium preselection SDN 552/554
Besides water, a water-glycol mixture is also often used as a heat carrier in cooling systems. Due to the changed thermal properties of the fluid through the incorporation of glycol, the accuracy of the displayed flow rate value is affected and the limit values are also changed. To correct this effect, the devices of the SDN 552/554 type series have a function for selecting the measurement medium. Glycol fractions up to 30% can be entered. The microprocessor working in the device then calculates the flow rate quantities considering the glycol fraction.

Applications
These devices are especially suitable for flow rate monitoring in cooling systems due to the greater functionality, as well as easy programming and installation.
These devices are characterized by short response times and robust display values, even if the medium is subject to large temperature fluctuations as to be found in welding technology in the automotive industry.
In the display, the flow rate value, which is continuously updated, is displayed in l/min. The person responsible for the plant or the machine has thus constantly the information on the available cooling performance.
Industrial climate control units are often operated with a water-glycol mixture in the secondary cycle due to the danger of freezing. The glycol fraction can be programmed in the SDN menu in a couple of seconds to ensure a correct value is also displayed in the application.

Use in Ex-areas

The Ex measurement probes of the series 400 and the Ex-amplifiers SZAb... meet the basic health and safety requirements of Directive 2014/30/EC. Electrical boundary data, permissible temperature ranges as well as installation and connection instructions are specified in the operating instructions of Ex equipment.
The permissible process pressure for the safe use of this devices in Ex atmospheres is 0.8...1.1 bar. The use of the measuring probes under different process pressures is the responsibility of the user. The specifications of the device must be observed.
The permissible ambient temperature range is determined for each temperature class in the technical data. If there are additional regulations for the particular design regarding the installation, they must be observed as well.

Zone classification and categories
The frequency and duration of the occurrence of a hazardous atmosphere determines the zone classification.

Zone 0 / Category 1 (Gas)
Zone 0 is an area in which a potentially explosive atmosphere in the form of a mixture of air, combustible gases, vapours or fog continuously, for longer periods or frequently exists.

Zone 1 / Category 2 (Gas)
Zone 1 is an area in which a potentially explosive atmosphere as a mixture of air, combustible gases, vapours or fog can occasionally form in normal operation.

Zone 2 / Category 3 (Gas)
Zone 2 is an area in which a potentially explosive atmosphere as a mixture of air, combustible gases, vapours or fog can occur in normal operation.

Zone 20 / Category 1 (Dust)
Zone 20 is an area in which a potentially explosive atmosphere in the form of combustible particles suspended in air continuously, for longer periods or frequently exists.

Zone 21 / Category 2 (Dust)
Zone 21 is an area in which a potentially explosive atmosphere in the form of combustible particles suspended in air can occasionally form in normal operation.

Zone 22 / Category 3 (Dust)
Zone 22 is an area in which a potentially explosive atmosphere in the form of combustible particles suspended in air normally does not exist or only exists for a short period in normal operation.

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Technique & Application

Ex area /Notes on safety applications

Specific conditions for use of flow sensor probes STSÖ

- Metallic process connection parts must be included in the local equipotential bonding.
- For equipment in the titanium housing, it must be ensured that there are no particles in the media flow that could cause an ignition hazard due to impact or friction.
- For EPL Ga/Gb applications and at risks by pendulum or vibraion the respective parts of the flow sensor type STS... have to be secured effectively against these dangers.
- For EPL Ga/Gb applications the medium tangent materials of the flow sensor type STS have to be resistant to the media.
- For EPL Ga/Gb applications the whole device flow sensor type STS... shall be mounted in a way that allows an installation that results in a sufficient tight joint (IP 66 or IP 67) or a flameproof joint (IEC 60079-1) in the direction of the less endangered area.

A measurement probe may only be used in dust or gas protected hazardous areas, even when there are approvals for both areas.
For use in hazardous areas for dusts the maximum surface temperature of the sensor is specified. For the hazardous area for gases the ambient temperatures of the temperature classes are given. On request, EGE delivers sensors with special dimensions and special materials as well as longer connection cables.

Ex marking

	A	B
II 1 G...	Zone 0	Zone 0
II 1/2 G...	Zone 0	Zone 1
II 2 G...	Zone 1	Zone 1
II 3 G...	Zone 2	Zone 2
II 1 D...	Zone 20	Zone 20
II 2 D...	Zone 21	Zone 21
II 3 D...	Zone 22	Zone 22

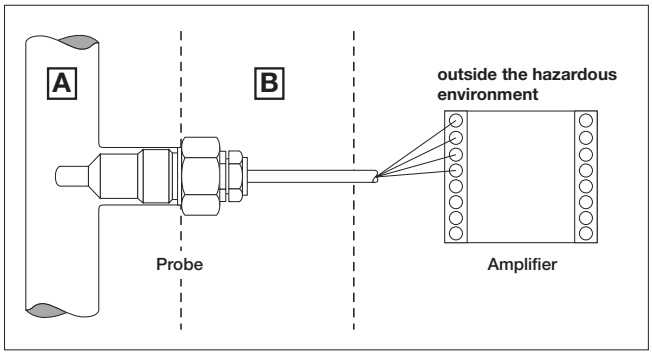

Notes on safety applications

The sensors are a standard component and not a safety device according to MD 2006/42/EC.
For safety applications a detailed assessment of the possible use of the sensor accord. to EN ISO 13849 or an other applicable standard by the plant construction is necessary.

Technique & Application

IO-Link

Use IO-Link
Universal · Smart · Easy

IO-Link is an internationally standardised communication technology (IEC 61131-9) for the data exchange with sensors and actuators. IO-Link enables the continuous communication from the control down to the lowest field level to the sensor.

EGE is a member of the IO-Link group of companies organised within the PNO (Profibus user organisation). It develops the technology and supports the members and users in the integration of IO-Link enabled products.

The following description of the IO-Link technology explains the key terms and functions.

Further information is available on the homepage of the IO-Link consortium: www.io-link.com.

Benefits

Cost reduction
Parametrisable sensors and actuators with a standardised interface reduce the multitude of device types required and reduce complexity during procurement.

Innovative machine concepts
Only a continuous communication with each sensor and actuator opens up all functions of intelligent devices. This permits the implementation of innovative machine and plant concepts.

Short commissioning times
IO-Link communication runs over unshielded cables and uses common industry connectors. The installation location can be optimised and the sensor later parametrised within the system. The complete parameter set can be stored in digital form and transmitted freely to additional devices.

Productivity
IO-Link devices automatically identify and parametrise themselves when changed (data storage). This simplifies the replacement of faulty components and reduces repair-related downtimes of machines and plant.

Maintenance
Intelligent IO-Link devices can be uniquely identified in the system, offer functions for self-diagnosis and supply data for the analysis of the system functionality. This permits novel preventative repair and maintenance concepts.

Parametrisation

IO-Link enabled sensors can comfortably be parametrised with a PC/ Notebook, an IO-Link master and the corresponding software and can then be used as conventional sensors with switching and analogue output (SIO mode). Alternative their use is also possible as IO-Link devices which supply the sensor signals as process data to a control.

System overview

An IO-Link system generally consists of the following components:

- IO-Link master
- IO-Link device (sensor/actuator)
- Unshielded cable
- Software for project planning and parametrisation of IO-Link devices

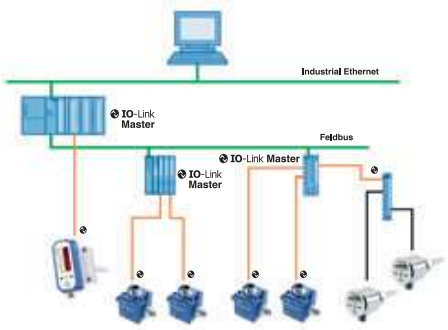

The IO-Link master provides the connection between the IO-Link sensor/ actuator and the automation system. As part of a peripheral system the IO-Link master is either coupled directly to the PLC in the control cabinet or installed as remote I/O component with field bus connection in the machine or plant. Such masters have several channels which can each be connected to a device with IO-Link functionality.

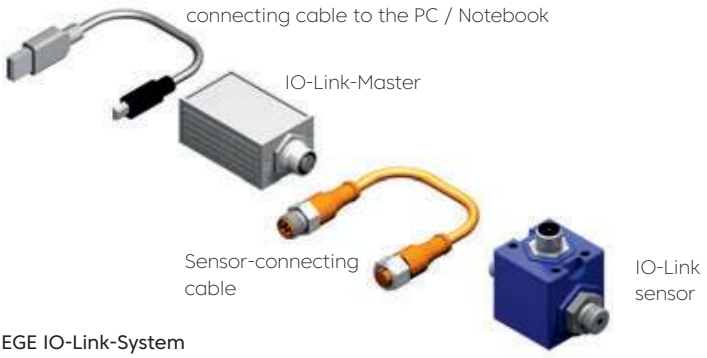

EGE IO-Link-System

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Technique & Application

IO-Link

IO-Link interface

IO-Link is a serial bidirectional point-to-point communication for the signal transmission and energy supply.

Connection technology in IP 65/IP 67

For the connection technology in IP 65 / 67 e.g. M12 plug connectors have been defined. Sensors normally feature a 4 pin connector and actuators a 5 pin connector.
IO-Link masters normally feature a 5 pin M12 socket.

The connection assignment has been specified in IEC 60974-5-2 as follows:

- Pin 1/L+ (BN): 24 V DC (IO-Link-specification: 18...30 V DC)
- Pin 3/Lñ (BU): 0 V
- Pin 4/C/Q (BK): Switching (Q)- and communication (C) line

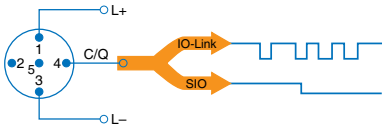

Connection type A

In type A the functional assignment for pin 2 and pin 5 is not defined by the IO-Link specification. The manufacturer can use these freely for additional output and input functions.
EGE uses pin 2 for an additional switching output, a 4...20 mA output or as signal input.

Connection cable

The connection cable of an IO-Link device to the master should according to the IO-Link specification not exceed a length of 20 m. An unshielded standard cable is sufficient.

IO-Link-communication

Operating modes

The port (pin 4 / C/Q) of an IO-Link master can be operated in the following operating modes:

- IO-Link: Data transfer between device and master
- DI (digital input): The binary output state of the connected device is processed (the sensor output supplies a switching signal).
- DQ (digital output): At the output the corresponding high or low level is present (an actuator is actuated).
- Deactivated: No use has been assigned to the port.

Starting the I/O-Link-communication

If the operating mode IO-Link is assigned to the port of an IO-Link master, the communication starts. The IO-Link master supplies a wake-up pulse and waits for the response of the IO-Link partner. After successfully establishing a connection, the master determines the data transmission rate of the device and starts the communication.

Transmission speed

The IO-Link specification V1.1 specifies three data transmission rates:

- COM 1: 4.8 kBd
- COM 2: 38.4 kBd
- COM 3: 230.4 kBd

An IO-Link device only supports one of the defined data transmission rates. An IO-Link master according to specification V1.1 supports all data transmission rates and automatically adjusts to the data transmission rate supported by the device.

Response time

The response time of an IO-Link system depends on the minimum cycle time of the device and the processing speed of the master. The device description file IODD includes a value for the minimum cycle time.

Transmission quality

The IO-Link communication utilises the 24 V level of the switching output for the transmission and is therefore highly interference-resistant.
If the IO-Link software detects an error in the data transmission, this is repeated. Only after three consecutive failed attempts is the connection terminated. This termination is reported to the higher level control without delay as an error message.

Technique & Application

IO-Link

Data types

Generally, four data types are available:

- Process data: Cyclic data
- Value status: Cyclic data
- Device data: Acyclic data
- Events: Acyclic data

Process data and value status

Process data and their value status are transmitted cyclically in a data telegram. The process data lengths has been defined with 0 to 32 bytes for each device in its specification by the manufacturer. The value status indicates whether the process data are value or invalid.

Device data

Device data may be parameters, identification data and diagnostic information. They are exchanged acyclically between the master and the device.

Events

If a previously defined event occurs in the device, the occurrence is reported to the master. The master then requests further information from the device and forwards the messages to the control. Events may be error messages and warnings. The IO-Link master can also transmit its own error messages and status data to the control.

The transmission of parameters or events is unaffected by the cyclical transmission of the process data.

Device profiles

Access from application programs to a device is standardised with IO-Link device profiles.

The device profiles define the data structure and content and the basic functionality. Different IO-Link devices are thus provided with a uniform user perspective and an identical program access by the control.

Smart sensor profile

In the IO-Link specification the "smart sensor profile" has currently been defined. It is particularly suited for measuring sensors, because in addition to the switching points measured values are also transmitted.

IODD device description file

The manufacturer provides for his IO-Link product an IODD (Input Output Device Description) in the form of XML files and images in digital form. The specified uniform structure of these files ensures the manufacturer-independent universal handling of the data. The IODD contain information about:

- Communication properties
- Device parameters with value ranges and default values
- Identification, process and diagnostic data
- Device data
- Text descriptions
- Device images
- Manufacturer logo

For devices which in addition to IO-Link version 1.0 also support version 1.1 there exist accordingly two different IODD versions.

IO-Link configuration tool

Software provided by the master manufacturer is required to configure an IO-Link system. This software uses the IODD for the communication and parametrisation of an IO-Link device. If multiple masters are used in control systems, the software has additional tasks:

- Assignment of the devices to the ports of the master
- Address allocation within the address range of the master

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Technique & Application

IO-Link

EGE-Products with IO-Link

EGE continuously expands its portfolio with sensors which include the IO-Link functionality. These can be integrated directly via the IO-Link interface in a control system and parametrised comfortably via this connection.
As with all standard components, customer-specific special designs are also possible within the framework of the IO-Link specification for products with IO-Link interface.

IO-Link Master

With the IO-Link master the easy parametrisation of IO-Link enabled sensors is possible. The matching configuration software is available as download from www.iq2.development.com and can be installed on a PC or Notebook. The set includes in addition to the master and power supply also an M12 connection cable to the sensor and a USB cable for connection to the PC.

IO-Link-USB-Master-Set	Z01216

Air flow monitoring with LN 520 GPL / LG 518 GPL

The LN 520 GPL / LG 518 GPL is a thermal flow monitor and detects the air flow and temperature of non-explosive gaseous media.
The illuminated cable outlet signals the flow status to the user in various colours. The PNP switching output in SIO mode or the process data with measured values for flow and temperature in IO-Link mode are available for further processing. The dependence of the measured flow value on the air flow is non-linear.

Functions/parameters

- Air flow measurement
- Temperature measurement in the flowing medeium
- Storage of min. and max values
- Flow status visualided by red/ yellow/green colour display
- Fulfils current IO-Link specification V 1.1.3 (downard compatible)
- Operating parameters adjustable via IO-Link interface

For operation in SIO mode the parameterisation of the sensor is carried out via the IO-Link interface. In the configuration tool, numerical values for the limit values can be entered or teached in by command.
The illuminated cable outlet changes its colour from red to yellow when the set limit value is reached. A further increase in the flow rate is signalled by the colour green. If there is a connection to an IO-Link master, this is shown with the colour blue. Green light with an IO-Link-specific flashing frequency makes the sensor identifiable in a complex system after the locator function has been activated.

LG 518 GPL	M18x1 threaded sleeve	P11431
LN 520 GPL	⌀ 0 mm smooth sleeve	P11432

Flow rate measurement and monitoring with SDNC 500 GAPL/ GANPL

for water-based media, linearized:

SDNC 502 GAPL	0.020...0.500 l/min	P11381
SDNC 503 GAPL	0.05...2.00 l/min	P11375
SDNC 506 GAPL	0.10...4.00 l/min	P11377
SDNC 508 GAPL	0.20...8.00 l/min	P11379

for water/glycol/oil, non linear:

SDNC 503 GANPL	0.0... appr. 6.0 l/min	P11376
SDNC 506 GANPL	0.0... appr. 15.0 l/min	P11378
SDNC 508 GANPL	0.0... appr. 30.0 l/min	P11380

SDNC 500 sensors with IO-Link interface are the smart solution for process monitoring. They can record the flow speed and temperature in fluid mediums. To do so, there is a configuration software which configures the sensors via an IO-Link/USB master. The ... GAPL models provide flow data for liquid mediums as a linear output signal. The detection range of sensors suitable for all liquid media can be freely configured. Their output signal is not linear.

Functions/parameters

- Limit value and range monitoring for flow rate andtemperature
- Adjustable delay for the switching signal
- Analog output scalable for flow rate or temperature
- Pulse output for flow rate
- Logical linking of flow rate and temperature monitoring

Technique & Application

IO-Link

- Teach commands for determining the limit and range values
- TAG identification programmable
- Available in the SIO mode analog and switching output

The flow rate sensors have a G1/4 process connection and can be easily integrated with hoses or pipe connectors in pipes. A special flow adapter shapes the flow profile and ensures a stable signal for the SDNC 502/503/506 GAPL. In the SDNC 508 GAPL a straight inlet section of 100 mm is sufficient to achieve the specifications. The measuring range of the ...GANPL variants can be adapted to almost all media. A non-linear signal path results. The robust construction makes the sensors not sensitive to moisture and vibrations..

Compressed air consumption measurement with LDN

The compressed air sensor LDN 1009 detects the flow rate and the temperature in compressed air networks. It shows the current air flow rate of a connected tool or system in an easy-to-read display and respond quickly to any changes in flow speed. At the same time the sensor also act as volume meter and measure the air consumption in the units standard litre and standard cubic metre.

LDN 1009 GAPL

LDN 1009 GAPL	G1/4 ï 15 Nm³/h	
		P11373

The functional principle of the compressed air sensor is calorimetric. Heat is removed from a sensor element by passing air and results in a temperature reduction. The amount of reduction is determined by the air mass and results in an output signal proportional to the mass flow. No pressure or temperature compensation is required for the medium state. According to factory configuration the flow rate is displayed directly in standard litres or standard cubic metres. The standard conditions for pressure and temperature can be adjusted in the application.

The sensor is inserted inline into the pipe line. The lengths for run-in and run-out distances required result from pipe routes and any existing controls and instruments upstream of the sensor. For the operation of the compressed air meters the air must be free from oil, filtered and dehumidified in accordance with class 1.4.1 as per ISO 8573-1.

IO-Link Converter

The IO-Link converter IOL-KONV-UIS-01 is connected between a sensor with analog/switching output and an IO-Link master. It acquires up to two analog/switching signals and transmits them digitally to the master via the IO-Link interface.
In addition, the current consumption and operating voltage of the connected sensor are permanently monitored and sensor errors are reported to the controller in an IO-Link event.

Functions/parameters

- Input configurable for voltage, current or switching signal
- 4...20 mA output scalable
- Monitoring of supply voltage
- Events configurable
- TAG identifier configurable on the device
- IO-Link Device V 1.1

Mounting brackets offer a variety of mounting options within the plant. The converter is connected to the sensor and IO-Link master via an unshielded M12 cable connection.
The converter is parameterized via the IO-Link interface using an engineering tool.

IO-Link-Konverter

IOL-KONV-UIS-01	Z01297

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Flow Sensors

Series 400 & Series 500

Probes
Compact models
Amplifiers

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Probe | Plug-in installation

Connection thread
M18x1.5

Plug-in installation
Can be used universally with an adapter

Design	*M18x1.5*	*M18x1.5*
Dimensions	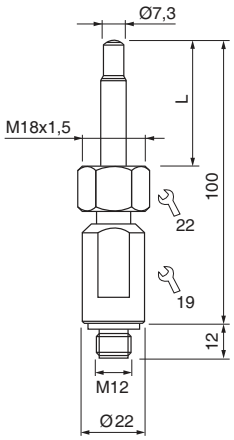	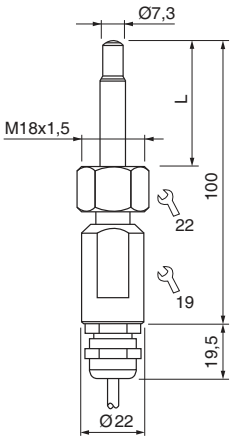
Detection range [cm/s]		
Water	1...150	1...150
Oil	3...300	3...300
Sensor length L [mm]	47	47
ID-No.	**P11354**	**P11355**
Type	ST 418 S-A4	ST 418 K-A4
Medium temperature [°C]	ñ20...+80	
Temperature gradient [K/min]	250	
Start-up time typ. [s]	8 (2...15)	
Reaction time typ. [s]	2 (1...13)	
Compressive strength [bar]	100	
Sensor material	AISI 316 Ti	
Protection [EN 60529]	IP 67	IP 68
Connection	M12 connector	2 m PVC-cable 4x0.25 mm²



1: BN
2: WH
3: BU
4: BK

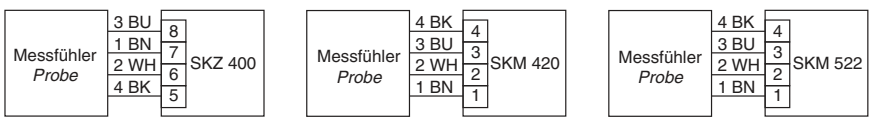

Amplifiers required: SKM..., SKZ..., see page 1.75 - 1.79

Accessories	connecting cable type SLG, SLW (page 1.108), Screw-in adapter SDA-SCS-... (page 1.112)

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Probe | Standard thread

G1/2 thread

Stainless steel
PTFE-Housing

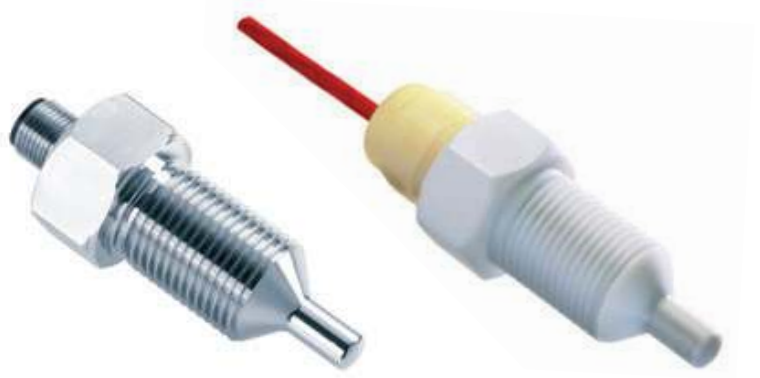

Design	G1/2	G1/2	G1/2 PTFE
Dimensions			
Detection range [cm/s]			
Water	1...150	1...150	1...70
Oil	3...300	3...300	2...100
Sensor length [mm]	48	48	48
ID-No.	P10412	P10414	P10431
Type	ST 421 K-A4	ST 421 S-A4	ST 421 K-F
Medium temperature [°C]	ñ20...+80		ñ10...+70
Temperature gradient [K/min]	250		1
Start-up time typ. [s]	8 (2...15)		60 (40...100)
Reaction time typ. [s]	2 (1...13)		30 (10...50)
Compressive strength [bar]	100		5
Sensor material	AISI 316 Ti ï different material on request		PTFE
Protection [EN 60529]	IP 68	IP 67	IP 68
Connection	2 m PVC-cable 4x0.25 mm²	M12 connector	2 m FEP-cable 4x0.25 mm² cable gland PVDF



1: BN
2: WH
3: BU
4: BK







Amplifiers required: SKM..., SKZ..., see page 1.75 - 1.79

Accessories	connecting cable type SLG 4-2 (Z00445), SLW 4-2 (Z00446), see page 1.108

Probe | Short thread

G1/4 thread
G1/2 thread

Stainless steel

Design	*G1/4*	*G1/4*	*G1/2*	*G1/2*
Dimensions				
Detection range [cm/s]				
Water	1...150	1...150	1...150	1...150
Oil	3...300	3...300	3...300	3...300
Sensor length [mm]	25	25	31	31
ID-No.	**P10402**	**P10404**	**P10408**	**P10410**
Type	STK 412 K-A4	STK 412 S-A4	STK 421 K-A4	STK 421 S-A4
Medium temperature [°C]	ñ20...+80			
Temperature gradient [K/min]	250			
Start-up time typ. [s]	8 (2...15)			
Reaction time typ. [s]	2 (1...13)			
Compressive strength [bar]	100			
Sensor material	AISI 316 Ti ï different material on request			
Protection [EN 60529]	IP 68	IP 67	IP 68	IP 67
Connection	2 m PVC-cable 4x0.25 mm²	M12 connector	2 m PVC-cable 4x0.25 mm²	M12 connector



1: BN
2: WH
3: BU
4: BK







Amplifiers required: SKM..., SKZ..., see page 1.75 - 1.79

Accessories	connecting cable type SLG 4-2 (Z00445), SLW 4-2 (Z00446), see page 1.108

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Probe | Extra long

G1/2 thread

Stainless steel

Design	G1/2		G1/2	
Dimensions	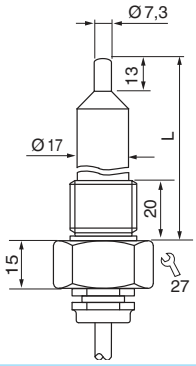			
Detection range [cm/s]				
Water	1...150		1...150	
Oil	3...300		3...300	
Sensor length L [mm]	80	120	80	120
ID-No.	P10901	P10902	P10904	P10905
Type	ST 421 K-L80	ST 421 K-L120	ST 421 S-L80	ST 421 S-L120
Medium temperature [°C]	ñ20...+80			
Temperature gradient [K/min]	250			
Start-up time typ. [s]	8 (2...15)			
Reaction time typ. [s]	2 (1...13)			
Compressive strength [bar]	100			
Sensor material	AISI 316 Ti ï different materials on request			
Protection [EN 60529]	IP 68		IP 67	
Connection	2 m PVC-cable 4x0.25 mm²		M12 connector	

Extra long sensors up to 300 mm on request



1: BN
2: WH
3: BU
4: BK

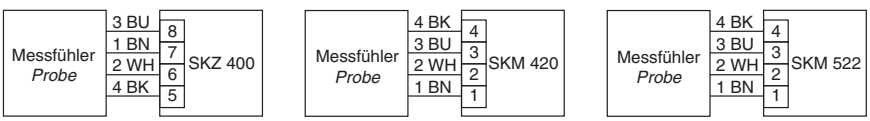

Amplifiers required: SKM..., SKZ..., see page 1.75 - 1.79

Accessories	connecting cable type SLG 4-2 (Z00445), SLW 4-2 (Z00446), see page 1.108

Probe | High temperature 120 °C

G1/4 thread
G1/2 thread
M18x1.5

Stainless steel

Medium temperature up to 120 °C

Design	G1/4	G1/2	G1/2	M18x1.5
Dimensions				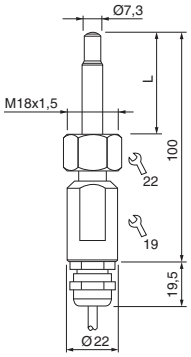
Detection range [cm/s]				
Water	1...150	1...150	1...150	1...150
Oil	3...300	3...300	3...300	3...300
Sensor length [mm]	25	31	48	48
ID-No.	**P10435**	**P10436**	**P10437**	**P11356**
Type	STK 412 KH-A4	STK 421 KH-A4	ST 421 KH-A4	ST 418 KH-A4
Medium temperature [°C]	+10...+120			
Temperature gradient [K/min]	250			
Start-up time typ. [s]	8 (2...15)			
Reaction time typ. [s]	2 (1...13)			
Compressive strength [bar]	100			
Sensor material	AISI 316 Ti ï different materials on request			
Protection [EN 60529]	IP 68			
Connection	2 m FEP-cable, 4x0.25 mm²			

Special design on request.







Amplifiers required: SKM..., SKZ..., see page 1.75 - 1.79

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Probe | High temperature 160 °C

G1/2 thread

Resistant to hot steam

Medium temperature up to 160 °C

Design		*G1/2*		
Dimensions				
Detection range				
Fluids	[cm/s]	1...300	1...300	1...300
Air / gas	[m/s]	1...40	1...40	1...40
Sensor length	[mm]	31	48	80
ID-No.		**P11259**	**P11260**	**P11261**
Type		ST 521 KH	ST 521/1 KH	ST 521/2 KH
Medium temperature	[°C]	fluids +10...160 ñ air/gas +10...135		
Temperature gradient	[K/min]	fluids 250 ñ air/gas 20		
Start-up time	[s]	5...20		
Reaction time	[s]	2...20		
Compressive strength	[bar]	60		
Protection	[EN 60529]	IP 67		
Sensor material		AISI 316 Ti ï different materials on request		
Connection		2 m FEP-cable 4x0.25 mm²		





Amplifiers required: SKM..., SKZ..., see page 1.75 - 1.79

Probe | High temperature 160 °C

G1/2 thread

Resistant to hot steam

Medium temperature up to 160 °C

Design	*G1/2*		
Dimensions			
Detection range			
Fluids [cm/s]	1...300	1...300	1...300
Air / gas [m/s]	1...40	1...40	1...40
Sensor length [mm]	31	48	80
ID-No.	**P11426**	**P11427**	**P11428**
Type	ST 5021 KH	ST 5021/1 KH	ST 5021/2 KH
Medium temperature [°C]	fluids +10...160 ñ air/gas +10...135		
Temperature gradient [K/min]	fluids 250 ñ air/gas 20		
Start-up time [s]	5...20		
Reaction time [s]	2...20		
Compressive strength [bar]	60		
Protection [EN 60529]	IP 67		
Sensor material	AISI 316 Ti ï different materials on request		
Connection	2 m FEP-cable 4x0.25 mm²		



Amplifiers required: SKM 520, see page 1.77

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Probe | Chemical resistant

G1/2 thread

Hastelloy B-2/C-22

Titanium case with metal ceramic coating

Design	G1/2...HB2/HC22		G1/2...K-B3	G1/2...S-B3
Dimensions				
Detection range [cm/s]				
Water	1...150	1...150	1...150	1...150
Oil	3...300	3...300	3...300	3...300
Sensor length [mm]	31	31	34	34
ID-No.	**P10625**	**P11159**	**P10623**	**P10622**
Type	STA 421 K-HB2	STA 421 K-HC22	STA 421 K-B3	STA 421 S-B3
Medium temperature [°C]	ñ20...+80 (+10...+120 on request)			
Temperature gradient [K/min]	250			
Reaction time [s]	1...15			
Compressive strength [bar]	100			
Sensor material	Hastelloy B-2	Hastelloy C-22	Titanium / metal ceramic	
Protection [EN 60529]	IP 68			IP 67
Connection	2 m FEP-cable 4x0.25 mm²			M12 connector



1: BN
2: WH
3: BU
4: BK

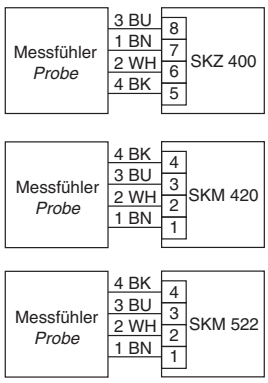

These sensors are made of titanium and are coated with a metal-ceramic material layer. Coated sensors display chemical resistance practically comparable to chemical characteristics of PTFE or Hastelloy. Unlike PTFE sensors, coated sensors display the same temperature behaviour as stainless steel sensors, with high temperature gradients.
The high surface hardness of the coating protects the sensor against abrasion, thus considerably increasing its durability. The perfectly smooth surface virtually eliminates deposits.

Amplifiers required: SKM..., SKZ..., see page 1.75 - 1.79

Accessories	connecting cable type SLG 4-2 (Z00445), SLW 4-2 (Z00446), see page 1.108

Compact models DC-PNP | Screw-in mounting

DC 24 V

Robust stainless steel housing

G1/4 thread
G1/2 thread
NPT 1/2 thread

Design	*G1/4*	*G1/2*			*NPT1/2*
Dimensions	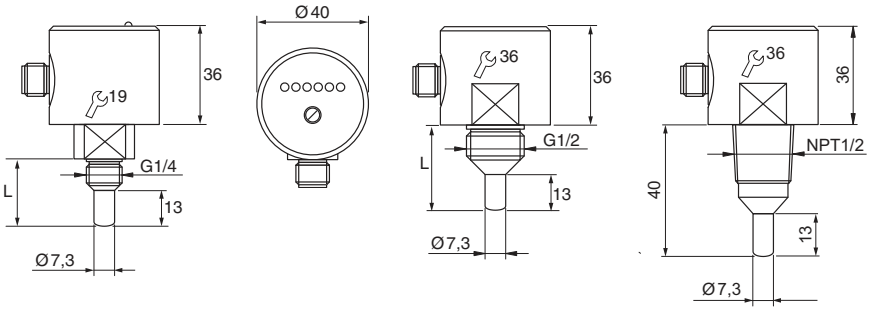				
Detection range [cm/s]	water 1...150 / oil 3...300				
Output	PNP				
Sensor length L [mm]	25	31	48	80	120	40
Thread	G1/4	G1/2	G1/2	G1/2	G1/2	NPT1/2
ID-No.	**P11064***	**P10521***	**P10523***	**P10525***	**P10526***	**P11066***
Type	SC 440/5-A4-GSP	SC 440-A4-GSP	SC 440/1-A4-GSP	SC 440/2-A4-GSP	SC 440/3-A4-GSP	SC 440/6-A4-GSP
Supply voltage [V]	24 DC ±20%					
Current consumption [mA]	< 70					
Switching current [mA]	< 400 (20 Œ)					
Ambient temperature [ŒC]	ñ20...+80					
Medium temperature [ŒC]	ñ20...+80					
Temperature gradient [K/min]	250 (> 60 cm/s)					
Start-up time typ. [s]	8 (2...15)					
Reaction time typ. [s]	2 (1...13)					
Compressive strength [bar]	100					
Sensor material	AISI 316 Ti ï different materials on request					
Housing material	AISI 316 Ti / AISI 303					
Display flow	LED-array					
Protection [EN 60529]	IP 67					
Connection	M12 connector					
* c UL us LISTED E304328						
Accessories	connecting cable type SLG 3-2, SLG 3-5, SLW 3-2, SLW 3-5, see page 1.108					

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models DC-PNP | Plug-in installation

DC 24 V

Robust stainless steel housing

Connection thread M18x1.5

Can be used universally with an adapter

Design	*M18x1.5*
Dimensions	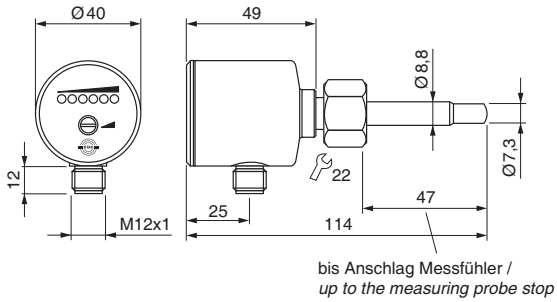
Detection range [cm/s]	water 1...150 / oil 3...300
Output	PNP
Sensor length L [mm]	47
Thread fixing nut	M18x1.5
ID-No.	**P11352**
Type	SCS 440-A4-GSP
Supply voltage [V]	24 DC ±20%
Current consumption [mA]	< 70
Switching current [mA]	< 400 (20 ℃)
Ambient temperature [℃]	ñ20...+80
Medium temperature [℃]	ñ20...+80
Temperature gradient [K/min]	250 (> 60 cm/s)
Start-up time typ. [s]	8 (2...15)
Reaction time typ. [s]	2 (1...13)
Compressive strength [bar]	100
Material	housing: AISI 316 L sensor: AISI 316 Ti
O-Ring-Material	FPM
Display flow	LED-array
Protection [EN 60529]	IP 67
Connection	M12 connector
*c UL us LISTED E304328	
Accessories	connecting cable type SLG, SLW (page 1.108), screw-in adapter SDA-SCS-... (page 1.112)

Compact models AC/DC

AC 230 V ï AC 115 V ï DC 24 V

PNP output ï Relay output

Connection thread M18x1.5

Can be used universally with an adapter

Design		*M18x1.5*			
Dimensions		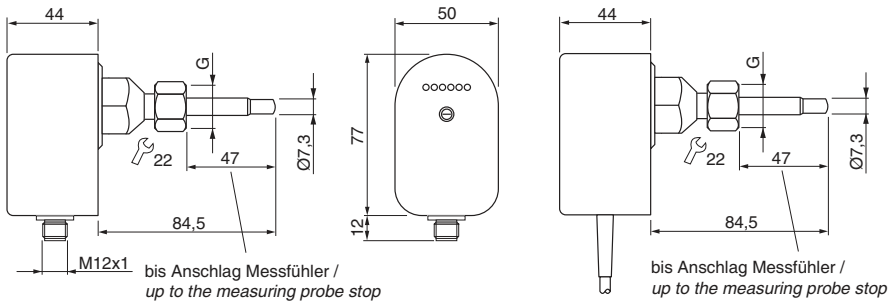			
Detection range	[cm/s]	water 1...150 / oil 3...300			
Output		PNP	Relay		
Sensor length L	[mm]	47	47	47	47
Connection thread G		M18x1.5	M18x1.5	M18x1.5	M18x1.5
ID-No.		P11360*	P11362*	P11364*	P11365*
Type		SNS 450-A4-GSP-S	SNS 450-A4-GR	SNS 450-A4-WR1	SNS 450-A4-WR2
Supply voltage	[V]	24 DC ±20%	24 DC ±20%	115 AC ±10%	230 AC ±10%
Current consumption	[mA]	< 60	<100	< 65	< 35
Switching voltage max.	[V]	ñ	250 AC / 60 DC	250 AC / 60 DC	250 AC / 60 DC
Switching current max.	[A]	0.4 (20Œ)	4 AC / 4 DC	4 AC / 4 DC	4 AC / 4 DC
Switching power max.		ñ	1000 VA / 60 W	1000 VA / 60 W	1000 VA / 60 W
Ambient temperature	[ŒC]	ñ20...+70			
Medium temperature	[ŒC]	ñ20...+80			
Temperature gradient	[K/min]	250			
Start-up time typ.	[s]	8 (2...15)			
Reaction time typ.	[s]	2 (1...13)			
Compressive strength	[bar]	100			
Sensor material		AISI 316 Ti			
Housing material		PBT			
Display flow		LED array			
Protection	[EN 60529]	IP 67			
Connection		M12 connector	2 m PVC-cable 5x0.5 mm²		
*c UL us LISTED E304328					
Accessories		connecting cable type SLG, SLW (page 1.108), screw-in adapter SDA-SCS-... (page 1.112)			

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models DC-PNP | Screw-in mounting

DC 24 V

PNP output

G1/2 thread

Design	*G1/2 ï L= 31 mm*		*G1/2 ï L= 48 mm*	
Dimensions	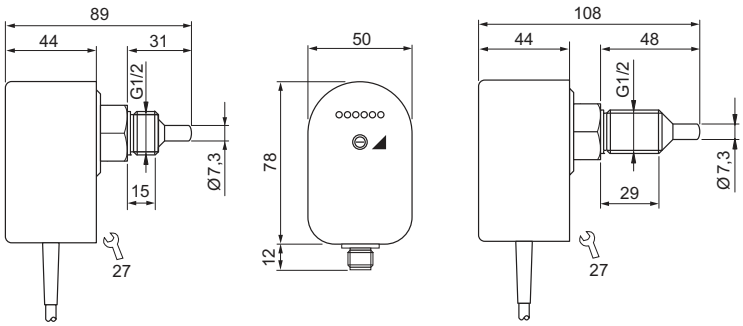			
Detection range [cm/s]	water 1...150 / oil 3...300			
Output	PNP			
Sensor length L [mm]	31	31	48	48
Thread	G1/2	G1/2	G1/2	G1/2
ID-No.	**P11241***	**P11161***	**P11228***	**P11162***
Type	SN 450-A4-GSP	SN 450-A4-GSP-S	SN 450/1-A4-GSP	SN 450/1-A4-GSP-S
Supply voltage [V]	24 DC ±20%			
Current consumption [mA]	< 60			
Switching current [mA]	< 400 (20 Œ)			
Ambient temperature [ŒC]	ñ20...+70			
Medium temperature [ŒC]	ñ20...+80			
Temperature gradient [K/min]	250(> 60 cm/s)			
Start-up time typ. [s]	8 (2...15)			
Reaction time typ. [s]	2 (1...13)			
Compressive strength [bar]	100			
Sensor material	AISI 316 Ti ï different materials on request			
Housing material	PBT			
Display flow	LED-array			
Protection [EN 60529]	IP 67			
Connection	2 m PVC-cable 3x0.5 mm²	M12 connector	2 m PVC-cable 3x0.5 mm²	M12 connector
* c UL us LISTED E304328				
Accessories	connecting cable type SLG 3-2, SLG 3-5, SLW 3-2, SLW 3-5, see page 1.108			

Compact models DC-Relay | Screw-in mounting

DC 24 V

Relay output

G1/2 thread

Design	*G1/2 ï L= 31 mm / 48 mm*		*G1/2 ï L= 31 mm / 48 mm*	
Dimensions	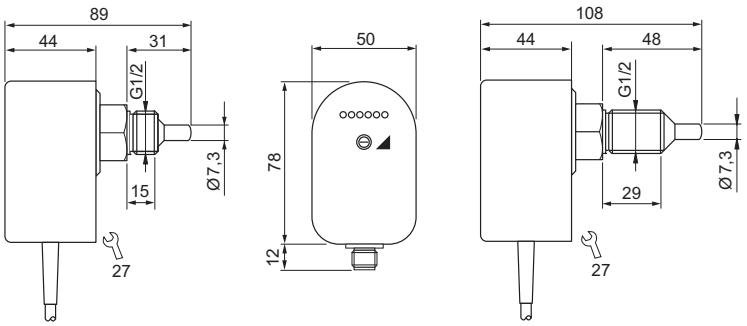			
Detection range [cm/s]	water 1...150 / oil 3...300			
Output	Relay		Relay	
Sensor length L [mm]	31	48	31	48
Thread	G1/2	G1/2	G1/2	G1/2
ID-No.	**P11115**	**P11078**	**P11116**	**P11086**
Type	SN 450-A4-GR	SN 450/1-A4-GR	SN 450-A4-GRS	SN 450/1-A4-GRS
Supply voltage [V]	24 DC ±20%			
Current consumption [mA]	< 80			
switching voltage max. [V]	250 AC / 60 DC		30 AC / 36 DC	
Switching current max. [mA]	4 A AC / 4 A DC		1 A AC / 1 A DC	
Switching power max.	1000 VA / 60 W		ñ	
Ambient temperature [ÏC]	ñ20...+70			
Medium temperature [ÏC]	ñ20...+80			
Temperature gradient [K/min]	250 (> 60 cm/s)			
Start-up typ. [s]	8 (2...15)			
Reaction time typ. [s]	2 (1...13)			
Compressive strength [bar]	100			
Sensor material	AISI 316 Ti ï different materials on request			
Housing material	PBT			
Display flow	LED-array			
Protection [EN 60529]	IP 67			
Connection	2 m PVC-cable 5x0.5 mm²		M12 connector	
				
Accessories	connecting cable type SLG 4-2, SLG 4-5, SLW 4-2, SLW 4-5, see page 1.108			

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models AC-Relay | Screw-in mounting

AC 230 V ï AC 115 V

Relay output

G1/2 thread

Design	*G1/2 ï L= 31 mm*		*G1/2 ï L= 48 mm*	
Dimensions	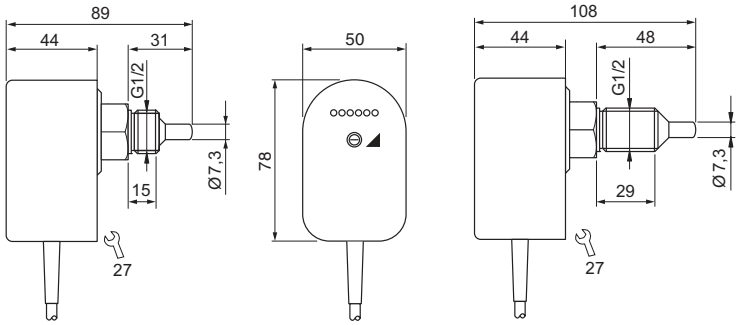			
Detection range [cm/s]	water 1...150 / oil 3...300			
Output	Relay			
Sensor length L [mm]	31	31	48	48
Thread	G1/2	G1/2	G1/2	G1/2
ID-No.	P11113	P11114	P11074	P11076
Type	SN 450-A4-WR1	SN 450-A4-WR2	SN 450/1-A4-WR1	SN 450/1-A4-WR2
Supply voltage [V]	115 AC ±15%	230 AC ±15%	115 AC ±15%	230 AC ±15%
Current consumption [mA]	< 60	< 30	< 60	< 30
Switching voltage max. [V]	250 AC / 60 DC			
Switching current max. [mA]	4 A AC / 4 A DC			
Switching power max.	1000 VA / 60 W			
Ambient temperature [C]	ñ20...+70			
Medium temperature [C]	ñ20...+80			
Temperature gradient [K/min]	250 (> 60 cm/s)			
Start-up time typ. [s]	8 (2...15)			
Reaction time typ. [s]	2 (1...13)			
Compressive strength [bar]	100			
Sensor material	AISI 316 Ti ï different materials on request			
Housing material	PBT			
Display flow	LED-array			
Protection [EN 60529]	IP 67			
Connection	2 m PVC-cable 5x0.5 mm²			
				

Compact models AC/DC | Extra long

AC 230 V ï AC 115 V ï DC 24 V

Relay output

G1/2 thread

Design	*G1/2 ï L= 80 mm*			*G1/2 ï L= 120 mm*		
Dimensions	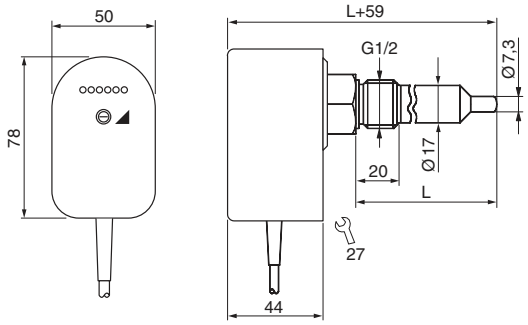					
Detection range [cm/s]	water 1...150 / oil 3...300					
Output	Relay					
Sensor length L [mm]	80	80	80	120	120	120
Thread	G1/2	G1/2	G1/2	G1/2	G1/2	G1/2
ID-No.	**P11079**	**P11080**	**P11081**	**P11082**	**P11083**	**P11084**
Type	SN 450/2-A4-WR1	SN 450/2-A4-WR2	SN 450/2-A4-GR	SN 450/3-A4-WR1	SN 450/3-A4-WR2	SN 450/3-A4-GR
Supply voltage [V]	115 AC ±15%	230 AC ±15%	24 DC ±20%	115 AC ±15%	230 AC ±15%	24 DC ±20%
Current consumption [mA]	< 60	< 30	< 80	< 60	< 30	< 80
Switching voltage max. [V]	250 AC / 60 DC					
Switching current max. [mA]	4 A AC / 4 A DC					
Switching power max.	1000 VA / 60 W					
Ambient temperature [ÏC]	ñ20...+70					
Medium temperature [ÏC]	ñ20...+80					
Temperature gradient [K/min]	250 (> 60 cm/s)					
Start-up time typ. [s]	8 (2...15)					
Reaction time typ. [s]	2 (1...13)					
Compressive strength [bar]	100					
Sensor material	AISI 316 Ti ï different materials on request					
Housing material	PBT					
Display flow	LED-array					
Protection [EN 60529]	IP 67					
Connection	2 m PVC-cable 5x0.5 mm²					
						

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models DC-Analog | Plug-in installation

DC 24 V

Analog output 4...20 mA

Connection thread M18x1,5

Can be used universally with an adapter

Design	*M18x1.5*		
Dimensions	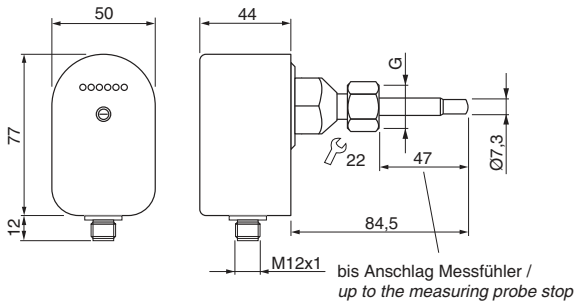		
Detection range [cm/s] Water Oil	5...150 ñ	5...300 ñ	1...150 3...300
Output		4...20 mA	
Sensor length L	47	47	47
Connection thread G	M18x1.5	M18x1.5	M18x1.5
ID-No.	P11357*	P11358*	P11359*
Type	SNS 450 GA	SNS 450 GA-3M	SNS 450 GAN-S
Supply voltage [V]	24 DC ±10%		
Current consumption [mA]	<100		
Current output [mA]	4...20, linear	4...20, linear	4...20, non linear
Load R_L [Ω]	200...500		
Ambient temperature [°C]	ñ20...+70		
Medium temperature [°C]	ñ20...+80		
Start-up time typ. [s]	8...60		
Reaction time typ. [s]	3		
Compressive strength [bar]	100		
Sensor material	AISI 316 Ti		
Housing material	PBT		
Display flow	LED-array		
Protection [EN 60529]	IP 67		
Connection	M12 connector		
* c UL us LISTED E304328			
Accessories	connecting cable type SLG, SLW (page 1.108), screw-in adapter SDA-SCS-... (page 1.112)		

Compact models DC-Analog | Screw-in mounting

DC 24 V

Analog output 4...20 mA

G1/2 thread

Design	*G1/2 ï L= 31 mm*		*G1/2 ï L= 48 mm*		
Dimensions	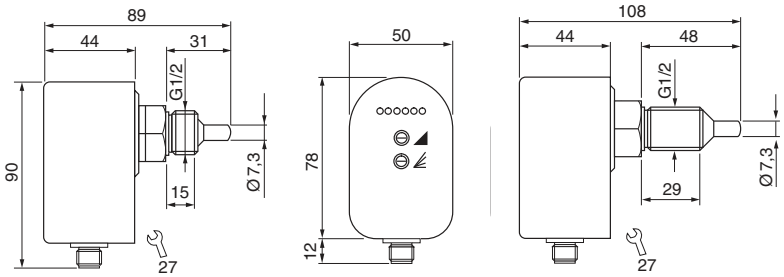				
Detection range [cm/s] Water Oil	5...150	5...300	5...150	5...300	5...150 3...300
Output			 4...20 mA		
Sensor length L [mm]	31	31	48	48	48
Thread	G1/2	G1/2	G1/2	G1/2	G1/2
ID-No.	**P11121 ***	**P11118 ***	**P11095 ***	**P11122 ***	**P11239 ***
Type	SN 450 GA	SN 450 GA-3M	SN 450/1 GA	SN 450/1 GA-3M	SN 450/1 GAN-S
Supply voltage [V]	24 DC ±10%				
Current consumption [mA]	<100				
Current output [mA]	4...20, linear				4...20, non linear
Load R_L [Ω]	200...500				
Ambient temperature [ÏC]	ñ20...+70				
Medium temperature [ÏC]	ñ20...+80				
Start-up time typ. [s]	8...60				
Reaction time typ. [s]	3				
Compressive strength [bar]	100				
Sensor material	AISI 316 Ti ï different materials on request				
Housing material	PBT				
Display flow	LED-array				
Protection [EN 60529]	IP 65				
Connection	M12 connector				
* c UL us LISTED E304328					
Accessories	connecting cable type SLG 3-2 (Z01076), see page 1.108				

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models DC-2x PNP | Screw-in mounting

DC 24 V

PNP output

G1/2 thread

Two independent switching points

Design	*G1/2 ï L= 31 mm*
Dimensions	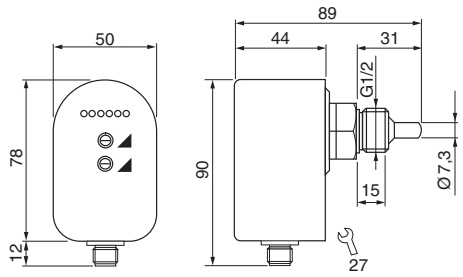
Detection range [cm/s]	water 1...150 / oil 3...300
Output	2x PNP
Sensor length L [mm]	31
Thread	G1/2
ID-No.	**P11264***
Type	SN 450 GPP
Supply voltage [V]	24 DC ±20%
Current consumption [mA]	< 60
Switching current max. [mA]	200 (20 □) each output
Ambient temperature [□C]	ñ20...+60
Medium temperature [□C]	ñ20...+80
Temperature gradient [K/min]	250 (> 60 cm/s)
Start-up time typ. [s]	8 (2...15)
Reaction time typ. [s]	2 (1...13)
Compressive strength [bar]	100
Sensor material	AISI 316 Ti ï different materials on request
Housing material	PBT
Display flow	LED-array
Protection [EN 60529]	IP 67
Connection	M12 connector
*c UL us LISTED E304328	
Accessories	connecting cable type SLG 4-2 (Z00445), see page 1.108

Compact models DC | with temperature control

DC 24 V

PNP output

G1/2 thread

Design	*G1/2 ï L= 31 mm*		*G1/2 ï L= 48 mm*	
Dimensions	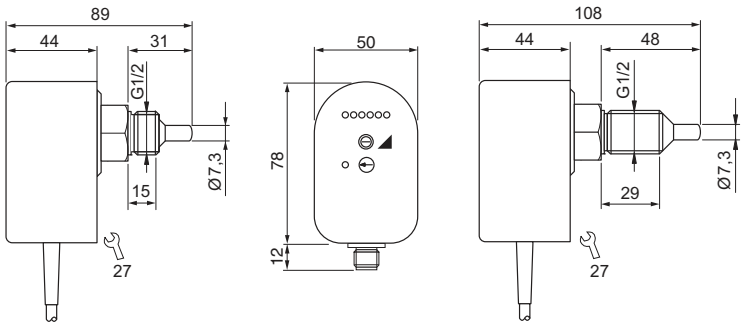			
Detection range [cm/s]	water 1...150 / oil 3...300			
Output	2x PNP			
Sensor length L [mm]	31	31	48	48
Temperature [ºC]	0...+80	0...+80	0...+80	0...+80
ID-No.	**P11218***	**P11219***	**P11224***	**P11225***
Type	SNT 450-A4-GSP	SNT 450-A4-GSP-S	SNT 450/1-A4-GSP	SNT 450/1-A4-GSP-S
Supply voltage [V]	24 DC ±20%			
Current consumption [mA]	< 60			
Switching current max. [mA]	200 (20 ºC) each output			
Ambient temperature [ºC]	ñ20...+70			
Medium temperature [ºC]	ñ20...+80			
Temperature gradient [K/min]	250(> 60 cm/s)			
Start-up time typ. [s]	8 (2...15)			
Reaction time typ. [s]	2 (1...13)			
Compressive strength [bar]	100			
Sensor material	AISI 316 Ti ï different materials on request			
Housing material	PBT			
Display flow	LED-array			
Protection [EN 60529]	IP 65			
Connection	2 m PVC-cable 4x0.5 mm²	M12 connector	2 m PVC-cable 4x0.5 mm²	M12 connector

*c UL us LISTED
E304328



(4) BK: Flow
(2) WH: Temperature

Accessories	connecting cable type SLG 4-2, SLG 4-5, SLW 4-2, SLW 4-5, see page 1.108

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models DC | with temperature control

DC 24 V

Relay output

G1/2 thread

Design		G1/2 ï L= 31 mm		G1/2 ï L= 48 mm	
Dimensions		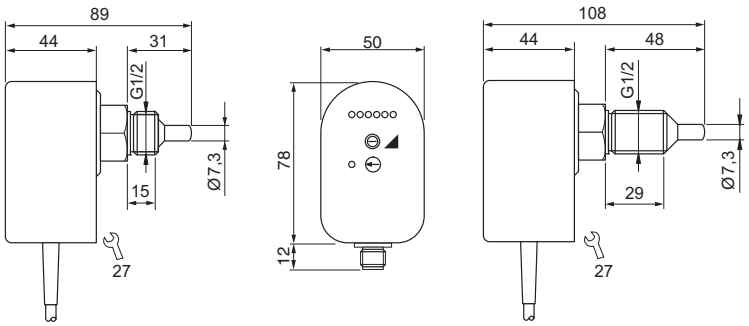			
Detection range	[cm/s]	water 1...150 / oil 3...300			
Output		Relay			
Sensor length L	[mm]	31	31	48	48
Temperature	[C]	0...+80	0...+80	0...+80	0...+80
ID-No.		P11216	P11217	P11222	P11223
Type		SNT 450-A4-GR	SNT 450-A4-GR-S	SNT 450/1-A4-GR	SNT 450/1-A4-GR-S
Supply voltage	[V]	24 DC ±20%	24 DC ±20%	24 DC ±20%	24 DC ±20%
Current consumption	[mA]	< 80	< 80	< 80	< 80
Switching voltage max.	[V]	250 AC / 60 DC	30 AC / 36 DC	250 AC / 60 DC	30 AC / 36 DC
Switching current max.	[mA]	2A AC / 2A DC	1A AC / 1A DC	2A AC / 2A DC	1A AC / 1A DC
Switching power max.		500 VA / 60 W	ñ	500 VA / 60 W	ñ
Ambient temperature	[C]	ñ20...+70			
Medium temperature	[C]	ñ20...+80			
Temperature gradient	[K/min]	250 (> 60 cm/s)			
Start-up time typ.	[s]	8 (2...15)			
Reaction time typ.	[s]	2 (1...13)			
Compressive strength	[bar]	100			
Sensor material		AISI 316 Ti ï different materials on request			
Housing material		PBT			
Display flow		LED-array			
Protection	[EN 60529]	IP 65			
Connection		2 m PVC-cable 6x0.5 mm²	M12 connector	2 m PVC-cable 6x0.5 mm²	M12 connecor
				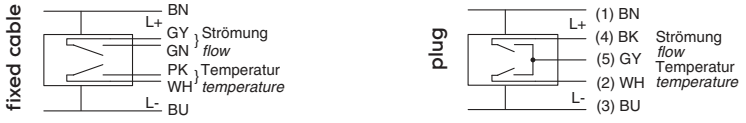		
Accessories		connecting cable type SLG 5-2, SLW 5-2, see page 1.108			

Compact models AC | with temperature control

AC 230 V ï AC 115 V

Relay output

G1/2 thread

Design		G1/2 ï L= 31 mm		G1/2 ï L= 48 mm	
Dimensions		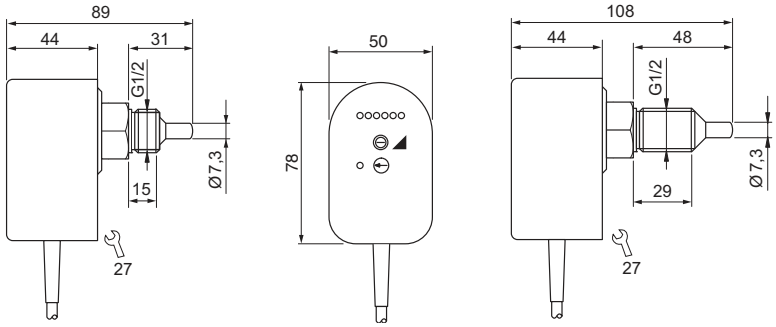			
Detection range	[cm/s]	water 1...150 / oil 3...300			
Output		Relay			
Sensor length L	[mm]	31	31	48	48
Temperature	[ºC]	0...+80	0...+80	0...+80	0...+80
ID-No.		**P11214**	**P11215**	**P11220**	**P11221**
Type		SNT 450-A4-WR1	SNT 450-A4-WR2	SNT 450/1-A4-WR1	SNT 450/1-A4-WR2
Supply voltage	[V]	115 AC ±15%	230 AC ±15%	115 AC ±15%	230 AC ±15%
Current consumption	[mA]	< 60	< 30	< 60	< 30
Switching voltage max.	[V]	250 AC / 60 DC			
Switching current max.	[A]	2 AC / 2 DC			
Switching power max.		500 VA / 60 W			
Ambient temperature	[ºC]	ñ20...+70			
Medium temperature	[ºC]	ñ20...+80			
Temperature gradient	[K/min]	250 (> 60 cm/s)			
Start-up time typ.	[s]	8 (2...15)			
Reaction time typ.	[s]	2 (1...13)			
Compressive strength	[bar]	100			
Sensor material		AISI 316 Ti ï different materials on request			
Housing material		PBT			
Display flow		LED-array			
Protection	[EN 60529]	IP 65			
Connection		2 m PVC-cable 6x0.5 mm²			
					

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models AC/DC | Turn on/off delay

AC 230 V ï DC 24 V

Relay output

G1/2 thread

Design	*Turn on delay*	*Turn off delay*	
Dimensions	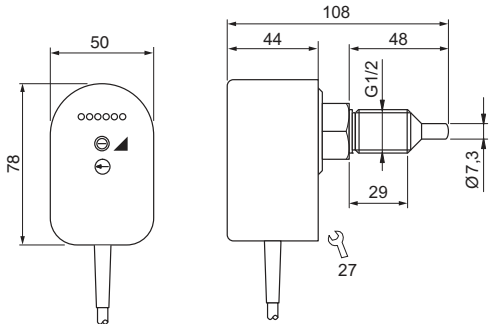		
Detection range [cm/s]	water 1...150 / oil 3...300		
Output	Relay		
ID-No.	**P11234**	**P11233**	**P11231**
Type	SN 450/1 GR-VE	SN 450/1 GR-VA	SN 450/1 WR2-VA
Turn on delay [s]	0...25	ñ	ñ
Turn off delay [s]	-	0...25	0...25
Supply voltage [V]	24 DC ±20%	24 DC ±20%	230 AC ±15%
Current consumption [mA]	< 80	< 80	< 30
Switching voltage max. [V]	250 AC / 60 DC		
Switching current max. [A]	2 AC / 2 DC		
Switching power max.	500 VA / 60 W		
Ambient temperature [C]	ñ20...+70		
Medium temperature [C]	ñ20...+80		
Temperature gradient [K/min]	250 (> 60 cm/s)		
Start-up time typ. [s]	8 (2...15)		
Reaction time typ. [s]	2 (1...13)		
Compressive strength [bar]	100		
Sensor material	AISI 316 Ti ï different materials on request		
Housing material	PBT		
Display flow	LED-array		
Protection [EN 60529]	IP 65		
Connection	2 m PVC-cable, 5x0.5 mm²		
			

Inline-Probes

Pipe diameter ÿ 4 mm / ÿ 9 mm

G1/4 thread

Design	*G1/4 ï ÿ 4 mm*	*G1/4 ï ÿ 9 mm*
Dimensions	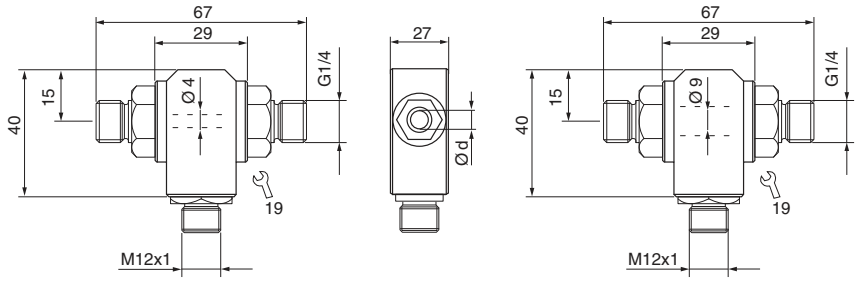	
Detection range [l/min]	0.001...1	0.01...6
Working range [l/min]	0.01...0.8	0.2...6
Inner diameter d [mm]	4	9
ID-No.	**P11251**	**P11252**
Type	SD 504 S	SD 510 S
Ambient temperature [ÏC]	ñ20...+70	
Medium temperature [ÏC]	0...+80	
Temperature gradient [K/min]	300K (>0.5 l/min)	300K (>4 l/min)
Start-up time [s]	5	
Reaction time typ. [s]	0.5...10	
Compressive strength [bar]	20	
Material	housing: PBT sensor: AISI 316 Ti	
Protection [EN 60529]	IP 67	
Connection	M12 connector	



Amplifiers required: SKM..., SKZ..., see page 1.75 - 1.79
(Temperature control with this sensor is not possible)

Accessories	connecting cable type SLG 4-2 (Z00445), see page 1.108

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Probes

Pipe diameter ÿ 4 mm / ÿ 9 mm

G1/4 thread

Design	*G1/4 ï ÿ 4 mm*	*G1/4 ï ÿ 9 mm*
Dimensions	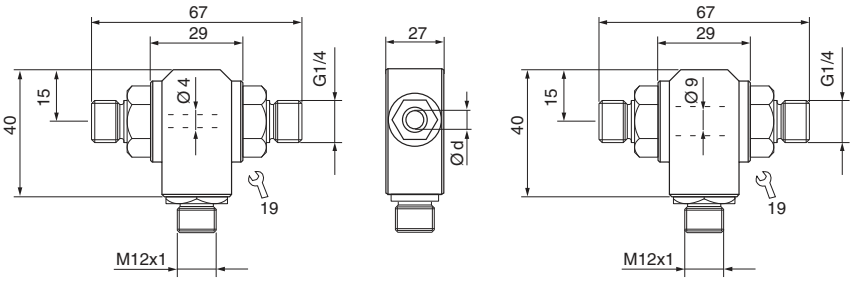	
Detection range [l/min]	0.001...1	0.01...6
Working range [l/min]	0.01...0.8	0.2...6
Inner diameter d [mm]	4	9
ID-No.	**P11429**	**P11430**
Type	SD 5004 S	SD 5010 S
Ambient temperature [ïC]	ñ20...+70	
Medium temperature [ïC]	0...+80	
Temperature gradient [K/min]	300K (> 0.5 l/min)	300K (> 4 l/min)
Start-up time [s]	5	
Reaction time typ. [s]	0.5...10	
Compressive strength [bar]	20	
Material	housing: PBT sensor: AISI 316 Ti	
Protection [EN 60529]	IP 67	
Connection	M12 connector	



1: BN
2: WH
3: BU
4: BK



Amplifiers required: SKM 520, page 1.77

Accessories	connecting cable type SLG 4-2 (Z00445), see page 1.108

Inline-Compact | up to 6 l/min

DC 24 V

PNP output
Relay output
Analog output

G1/4 thread ï ÿ 4 mm
G1/4 thread ï ÿ 9 mm

Design	*G1/4 ï ÿ 4 mm*			*G1/4 ï ÿ 9 mm*		
Dimensions						
Detection range [l/min]	0.001...1			0.01...6		
Working range [l/min]	0.015...1			0.1...6		
Inner diameter d [mm]	4			9		
Maximum flow [l/h]	300			1800		
Output	PNP	Relay	4...20 mA	PNP	Relay	4...20 mA
ID-No.	P11247*	P11271	P11249*	P11248*	P11273	P11250*
Type	SDN 504 GSP	SDN 504 GR	SDN 504 GA	SDN 510 GSP	SDN 510 GR	SDN 510 GA
Supply voltage [V]	24 DC ±10%					
Current consumption [mA]	< 50					
Switching voltage max. [V]	ñ	30 AC/36 DC	ñ	ñ	30 AC/36 DC	ñ
Switching current max. [mA]	200 (20 ℃)	1000	ñ	200	1000	ñ
Load R_L [Ω]	ñ	ñ	200...500	ñ	ñ	200...500
Ambient temperature [℃]	0...+60					
Medium temperature [℃]	0...+80					
Temperature gradient [K/min]	400 (> 0.1 l/min)			400 (> 0.5 l/min)		
Start-up time typ. [s]	5...15					
Reaction time typ. [s]	0.5...10					
Compressive strength [bar]	20					
Display flow	LED-array					
Material	housing: PBT sensor: AISI 316 Ti					
Protection [EN 60529]	IP 67					
Connection	M12 connector					
*c UL us LISTED E304328						
Accessories	connecting cable type SLG, SLW, SBG, SBW, see page 1.108					

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Compact | up to 40 l/min

DC 24 V

PNP output
Relay output
Analog output

G1/2 thread ï ÿ 15 mm
G3/4 thread ï ÿ 19 mm

Design	*G1/2 ï ÿ 15 mm*			*G3/4 ï ÿ 19 mm*		
Dimensions	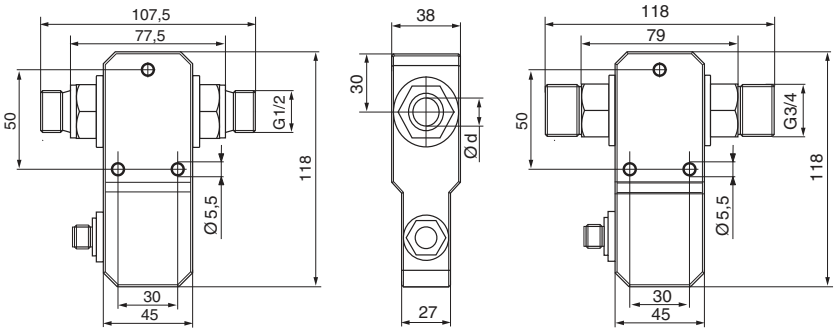					
Detection range [l/min]	2...25			3...40		
Working range [l/min]	3...20			4...30		
Inner diameter d [mm]	15			19		
Output	PNP	Relay	4...20 mA	PNP	Relay	4...20 mA
ID-No.	**P11284***	**P11288**	**P11286***	**P11285***	**P11289**	**P11287***
Type	SDN 515 GSP	SDN 515 GR	SDN 515 GA	SDN 520 GSP	SDN 520 GR	SDN 520 GA
Supply voltage [V]	24 DC ±10%					
Current consumption [mA]	< 50					
Switching voltage max. [V]	ñ	30 AC/36 DC	ñ	ñ	30 AC/36 DC	ñ
Switching current max. [mA]	200 (20 ℃)	1000	ñ	200 (20 ℃)	1000	ñ
Load R_L [Ω]	ñ	ñ	200...500	ñ	ñ	200...500
Ambient temperature [℃]	0...+60					
Medium temperature [℃]	0...+80					
Temperature gradient [K/min]	400 (> 7 l/min)			400 (> 10 l/min)		
Start-up time typ. [s]	5...15					
Reaction time typ. [s]	0.5...10					
Compressive strength [bar]	20					
Display flow	LED-array					
Material	housing: PBT sensor: AISI 316 Ti / FPM					
Protection [EN 60529]	IP 67					
Connection	M12 connector					
* c UL us LISTED E304328	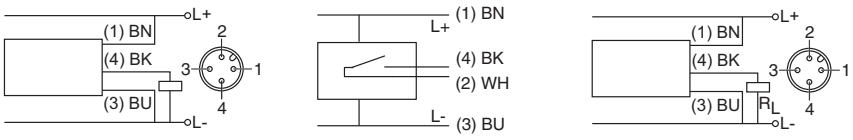					
Accessories	connecting cable type SLG, SLW, SBG, SBW, see page 1.108					

Inline-Compact | Micro flow

DC 24 V

PNP output ï Relais output
Analog output

G1/4 thread

Fast reaction time - high sensitivity

Design		*G1/4*		
Dimensions		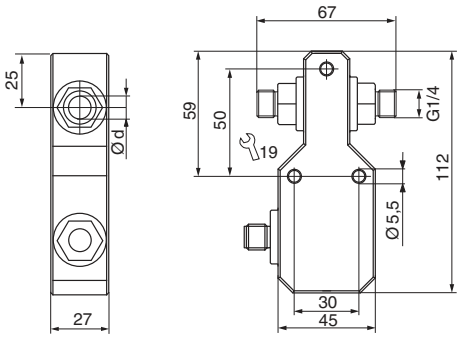		
Detection range	[ml/min]	0.1...500		
Working range	[ml/min]	1...200		
Inner diameter d	[mm]	3.6		
Maximum flow	[l/h]	100		
Output		PNP	Relay	4...20 mA, non linear
ID-No.		P11329*	P11330	P11331*
Type		SDN 503/1 GSP	SDN 503/1 GR	SDN 503/1 GA
Supply voltage	[V]	24 DC ±10%	24 DC ±10%	24 DC ±10%
Current consumption	[mA]	< 50	< 50	< 50
Switching voltage max.	[V]	ñ	30 AC/36 DC	ñ
Switching current max.	[mA]	200 (20 ☐)	1000	ñ
Load R_L	[Ω]	ñ	ñ	200...500
Ambient temperature	[☐C]	0...+60		
Medium temperature	[☐C]	0...+60		
Temperature gradient	[K/min]	400 (> 100 ml/min)		
Start-up time	[s]	5...60		
Reaction time	[s]	0.5...10		
Compressive strength	[bar]	10		
Display flow		LED-array		
Material		housing: PBT sensor: AISI 316 Ti		
Protection	[EN 60529]	IP 67		
Connection		M12 connector		
*c UL us LISTED E304328					
Accessories		connecting cable type SLG, SLW, SBG, SBW, see page 1.108		

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Compact | Micro flow

DC 24 V

PNP output ï Relais output
Analog output

ÿ 4 mm
ÿ 6 mm for tube fittings

Fast reaction time - high sensitivity

Design	*Tube connection ÿ 4 mm*			*Tube connection ÿ 6 mm*		
Dimensions	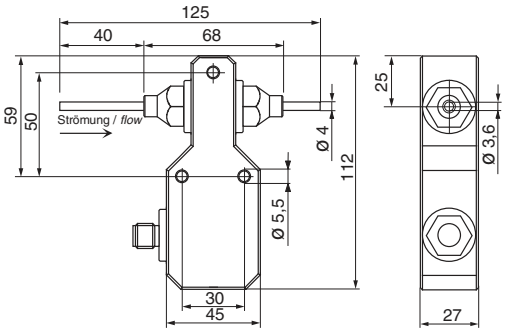			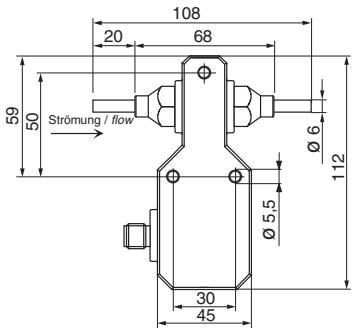		
Detection range [ml/min]	0.1...500					
Working range [ml/min]	1...200					
Inner diameter d [mm]	inner diameter 3.6 / outer diameter 4.0			inner diameter 3.6 / outer diameter 6.0		
Maximum flow [l/h]	100			100		
Output	PNP	Relay	4...20 mA	PNP	Relay	4...20 mA
ID-No.	**P11265***	**P11277**	**P11266***	**P11332***	**P11333**	**P11334***
Type	SDN 503 GSP	SDN 503 GR	SDN 503 GA	SDN 503/2 GSP	SDN 503/2 GR	SDN 503/2 GA
Supply voltage [V]	24 DC ±10%					
Current consumption [mA]	< 50					
Switching voltage max. [V]	ñ	30 AC/36 DC	ñ	ñ	30 AC/36 DC	ñ
Switching current max. [mA]	200 (20 ¢)	1000	ñ	200 (20 ¢)	1000	ñ
Load R_L [Ω]	ñ	ñ	200...500	ñ	ñ	200...500
Ambient temperature [°C]	0...+60					
Medium temperature [°C]	0...+60					
Temperature gradient [K/min]	400 (> 100 ml/min)					
Start-up time [s]	5...60					
Reaction time typ. [s]	0.5...10					
Compressive strength [bar]	1			10		
Display flow	LED-array					
Material	housing: PBT sensor: AISI 316 Ti					
Protection [EN 60529]	IP 67					
Connection	M12 connector					
* c UL us LISTED E304328						
Accessories	connecting cable type SLG, SLW, SBG, SBW, see page 1.108					

Inline-Compact | Micro flow

DC 24 V

PNP output

G1/4 thread

Detection of micro flow pulses

Fast reaction time - high sensitivity

For oiling systems

Design		*G1/4 pulse detection*	
Dimensions		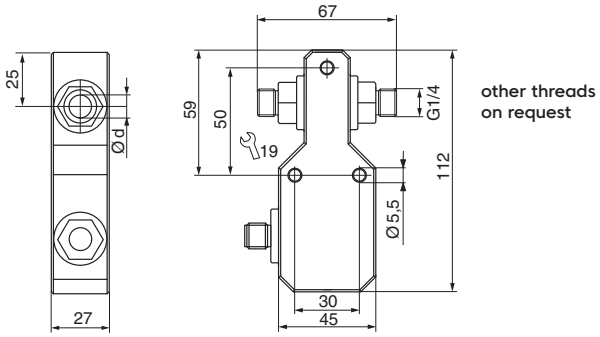 other threads on request	
Detection range	[ml/min]	from 0.02 ml / 100 ms	from 0,02 ml / 100 ms
Working range	[ml/min]	from 0.02 ml / 100 ms	from 0,04 ml / 100 ms
Inner diameter d	[mm]	4x1 mm² (rectangular)	3,6 mm
Media		waterbased media, lubricating and motor oil	waterbased media, lubricating oil
Output		PNP	PNP
ID-No.		P11396*	P11372*
Type		SDN 501/1 GSP-DYN	SDN 503/1 GSP-DYN
Supply voltage	[V]	24 DC ±20%	24 DC ±20%
Current consumption	[mA]	<60	<50
Switching current max.	[mA]	200 (20 ℃)	200 (20 ℃)
Ambient temperature	[℃]	0...+50	0...+60
Medium temperature	[℃]	0...+80	ñ20...+80
Start-up time typ.	[s]	60	15
Reaction time typ.	[s]	<0.1	<0.1
Turn off delay	[s]	0.5...10	0.5...10
Compressive strength	[bar]	10	20
Sensor material		AISI 316 Ti	
Housing material		PBT, AISI 303	PBT, AISI 303
Display flow		LED yellow	LED yellow
Protection	[EN 60529]	IP 67	IP 67
Connection		M12 connector	

* c UL us LISTED
E304328



The SDN... GSP-DYN detects increasing in flow. The switch-off delay is adjustable between 0.5...10 s



Accessories	connecting cable type SLG, SLW, SBG, SBW, see page 1.108

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Compact

DC 24 V

Flow monitoring

Can be easily integrated in the tubing

Immediately ready for use - no adjustment

Design	*G1/4 ï ÿ 3.6 mm*		
Dimensions	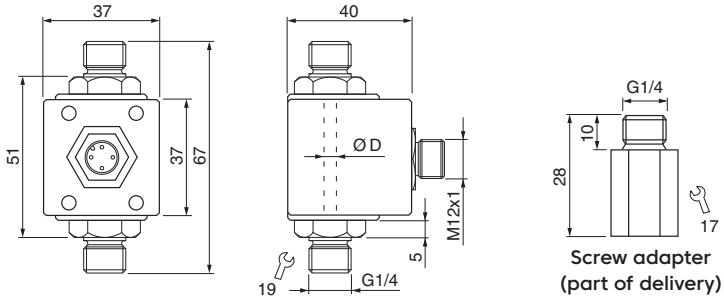 Screw adapter (part of delivery)		
Switching point [l/min]	water 0,5	water 1,0	water 1,5
Inner diameter D [mm]	3.6	3.6	3.6
Output	PNP	PNP	PNP
ID-No.	**P11338**	**P11340**	**P11341**
Type	SDNC 503 GSP-05	SDNC 503 GSP-10	SDNC 503 GSP-15
Supply voltage [V]	24 DC ±10%		
Current consumption [mA]	< 70		
Switching current max. [mA]	200 (20 □)		
Ambient temperature [□C]	0...+60		
Medium temperature [□C]	0...+60		
Reaction time typ. [s]	1 (0.5...10)		
Compressive strength [bar]	10		
Sensor material	AISI 316 Ti		
Housing material	PBT-GF30		
Protection [EN 60529]	IP 67		
Connection	M12 connector		
			
Accessories	connecting cable type SLW 3-2-LED, page 1.108		

Inline-Compact

DC 24 V

Flow monitoring of 50 up to 2000 ml/min

Can be easily integrated in the tubing

Immediately ready for use - no adjustment

Design	*G1/4 ï ÿ 3.6 mm*			
Dimensions	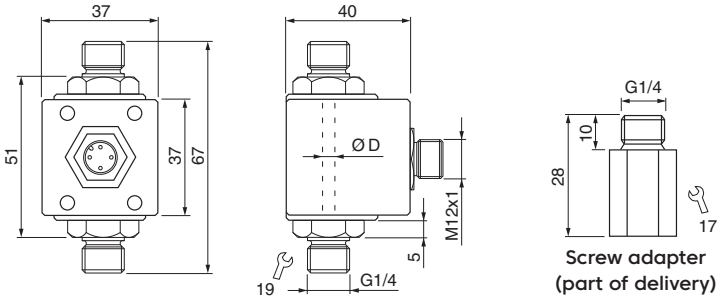 Screw adapter (part of delivery)			
Detection range [l/min]	water 0.05...1.0	water 0.2...2.0	water 0.05...1.0	water 0.2...2.0
Inner diameter D [mm]	3.6	3.6	3.6	3.6
Output	4...20 mA, linear	4...20 mA, linear	pulse, linear	pulse, linear
ID-No.	P11342	P11343	P11344	P11345
Type	SDNC 503 GA-10	SDNC 503 GA-20	SDNC 503 GP-10	SDNC 503 GP-20
Supply voltage [V]	24 DC ±10%			
Current consumption [mA]	< 70			
Load RL [Ω]	200...500	200...500	≥1000	≥1000
Pulse output [ml/Puls]	ñ	ñ	1	1
Ambient temperature [ÏC]	0...+60			
Medium temperature [ÏC]	0...+60			
Reaction time typ. [s]	1 (0.5...10)			
Compressive strength [bar]	10			
Sensor material	AISI 316 TI			
Housing material	PBT-GF30			
Protection [EN 60529]	IP 67			
Connection	M12 connector			
				
Accessories	connecting cable type SLG, SLW, page 1.108			

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Compact | with IO-Link

Monitoring of flow and temperature

Configurable via IO-Link

Detection range adjustable for all liquid media

Use IO-Link
Universal · Smart · Easy

Design	*G1/4*		
Dimensions	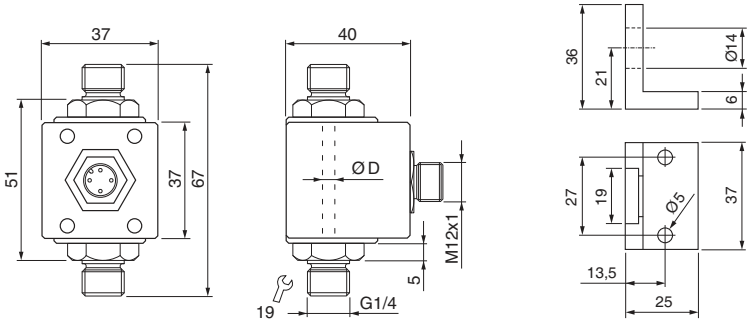 Mounting bracket		
Detection range	depending on medium, non linear		
Water / Glycol / Oil [l/min]	0...2 / 5 / 6	0...4 / 10 / 15	0...8 / 20 / 30
Inner diameter D [mm]	3.5	5.5	7.5
Output	/ / IO-Link PNP-NO/NC 150 mA (20 ℃) / 4...20 mA / IO-Link		
ID-No.	**P11376**	**P11378**	**P11380**
Type	SDNC 503 GANPL	SDNC 506 GANPL	SDNC 508 GANPL
Process data			
Flow [Steps]	0...1023		
Temperature [°C x 0.1]	0...600		
Supply voltage [V]	18...30 DC		
Current consumption [mA]	< 40		
Load (4...20 mA) [Ω]	200...500		
Ambient temperature [°C]	0...+60		
Medium temperature [°C]	0...+60		
Reaction time [s]	0.5...10		
Adjustable parameters	output functions, switching points, range, average value, teach-commandos		
IO-Link-Specifications	revision 1.1, baud rate COM 2, min. cycle time 3.5 ms, process data 4 Byte		
Compressive strength [bar]	10		
Material	housing: PBT-GF30 sensor: AISI 316 Ti		
Protection [EN 60529]	IP 67		
Connection	M12 connector		
			
Accessories	mounting bracket (Z01215), IO-Link / USB master set (Z01216), page 1.107		

Inline-Compact | with IO-Link

Monitoring of flow and temperature

Configurable via IO-Link

Linearized for water-based media

Use IO-Link
Universal · Smart · Easy

Design	*G1/4*			
Dimensions	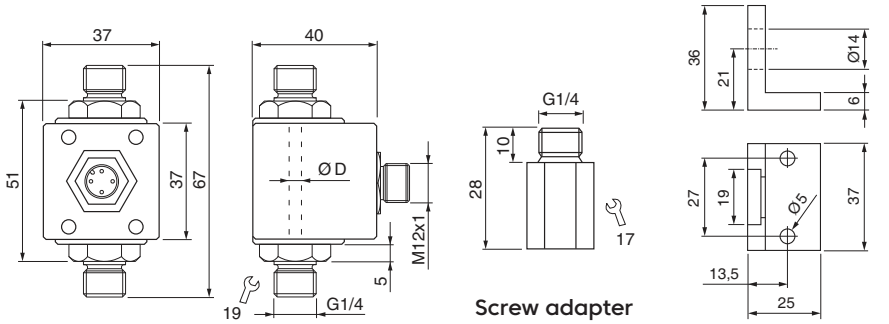 Screw adapter Mounting bracket			
Detection range	linearized for water-based media			
Water [l/min]	0.020...0.500	0.05...2.00	0.10...4.00	0.20...8.00
Inner diameter D [mm]	3.6	3.6	5.5	7.5
Output	/ / / IO-Link PNP-NO/NC 150 mA (20 ℃) / 4...20 mA / pulse output PNP-NO 1 ml/pulse / IO-Link			
ID-No.	P11381	P11375	P11377	P11379
Type	SDNC 502 GAPL	SDNC 503 GAPL	SDNC 506 GAPL	SDNC 508 GAPL
Process data				
Flow [l/min x 0.001]	0...500			
[l/min x 0.01]		0...200	0...400	0...800
Temperature [℃ x 0.1]	0...600	0...600	0...600	0...600
Supply voltage [V]	18...30 DC			
Current consumption [mA]	< 40			
Load [Ω]	200...500			
Ambient temperature [℃]	0...+60			
Medium temperature [℃]	0...+60			
Reaction time [s]	0.5...10			
Adjustable parameters	output functions, switching points, range, average value, teach-commandos			
IO-Link-Specifications	revision 1.1, baud rate COM 2, min. cycle time 3.5 ms, process data 4 Byte			
Compressive strength [bar]	10			
Material	housing: PBT-GF30 sensor: AISI 316 Ti			
Protection [EN 60529]	IP 67			
Connection	M12 connector			
Note: Screw adapter is part of delivery (except P11379)				
Accessories	mounting bracket (Z01215), IO-Link/USB master set (Z01216), page 1.107			

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Special-Probe | Food ï Pharma

DC 24 V-PNP

Compact model
Probe

Triclamp ÿ 50.5
DIN 11851

Design	*Triclamp compact*	*Triclamp ÿ 50.5*	*DIN 11851*
Dimensions			
Detection range [cm/s]			
Water	1...150	1...150	1...150
Oil	3...300	3...300	3...300
Output			
Connecting diameter	ÿ 50.5 mm	ÿ 50.5 mm	DN 25
ID-No.	**P11156**	**P11060**	**P10632**
Type	SCB 450 GSP	STB 450 K	STC 425 K
Surface roughness [µm]	≤ 0.8	≤ 0.8	
Supply voltage [V]	24 DC ±20%	ñ	
Current consumption [mA]	< 70	ñ	
Switching current max. [mA]	200 (20 ℃)	ñ	
Ambient temperature [℃]	ñ20...+80	ñ20...+80	
Medium temperature [℃]	ñ20...+80	+20...+120	
Temperature gradient [K/min]	250 (> 60 cm/s)	250 (> 60 cm/s)	
Start-up time [s]	8 (2...15)	8 (2...15)	
Reaction time typ. [s]	2 (1...13)	2 (1...13)	
Compressive strength [bar]	100	100	
Housing material	AISI 316 L	AISI 316 L / PVDF (cable gland)	
Protection [EN 60529]	IP 67	IP 68	
Connection	M12 connector	2 m FEP-cable 4x0.25 mm²	
For sealing a 3A-compliant seal must be used.			
Accessories	conn. cable SLG, SLW	amplifiers: SKM..., SKZ..., page 1.75 - 1.79	

Inline-Compact | Food ï Pharma

DC 24 V

PNP output
Relay output
Analog output

Triclamp connection ÿ 34 mm
Inner diameter ÿ 10 mm

Design	*Triclamp ï ÿ 10 mm*		
Dimensions	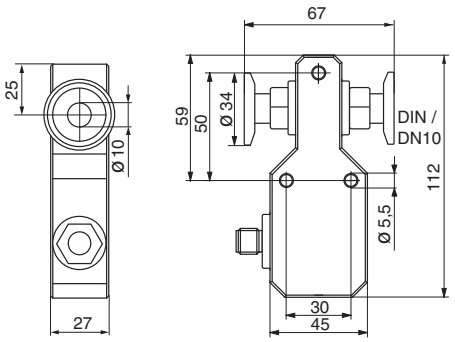		
Detection range [l/min]	0,01...6		
Working range [l/min]	0,1...6		
Inner diameter [mm]	10		
Output	PNP	Relay	4...20 mA, non linear
ID-No.	P11258*	P11279	P11280*
Type	SDB 510 GSP	SDB 510 GR	SDB 510 GA
Supply voltage [V]	24 DC ±10%		
Current consumption [mA]	< 50		
Switching voltage max. [V]	ñ	30 AC/36 DC	ñ
Switching current max. [mA]	200 (20 Œ)	1000	ñ
Load R_L [Ω]	ñ	ñ	200...500
Ambient temperature [ŒC]	0...+60		
Medium temperature [ŒC]	ñ20...+80	ñ20...+80	ñ20...+60
Temperature gradient [K/min]	400 (> 2 l/min)		
Start-up time typ. [s]	5...15		
Reaction time typ. [s]	0.5...10		
Compressive strength [bar]	20		
Display flow	LED-array		
Material	housing: PBT sensor: AISI 316 L		
Protection [EN 60529]	IP 67		
Connection	M12 connector		
*c UL us LISTED E304328			
For sealing a 3A-compliant seal must be used.			
Accessories	connecting cable type SLG, SLW, SBG, SBW, see page 1.108		

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Compact | Chemical

DC 24 V

PNP output
Relay output
Analog output

G1/4 thread ï ÿ 6 mm

Ceramic measuring cell
Metal free in contact with media

Design	*G1/4 ï ÿ 6 mm*		
Dimensions	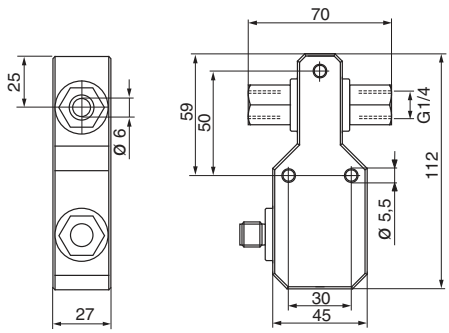		
Detection range [l/min]	0.005...3		
Working range [l/min]	0.02...3		
Inner diameter [mm]	6		
Maximum flow [l/h]	300		
Output	PNP	Relay	4...20 mA, non linear
ID-No.	**P11262***	**P11275**	**P11263***
Type	SDN 506 GSP-CER	SDN 506 GR-CER	SDN 506 GA-CER
Supply voltage [V]	24 DC ±10%		
Current consumption [mA]	ñ	< 50	ñ
Switching voltage max. [V]	ñ	30 AC/36 DC	ñ
Switching current max. [mA]	200	1000	ñ
Load R_L [Ω]	ñ	ñ	200...500
Ambient temperature [ïC]	0...+60		
Medium temperature [ïC]	0...+60		
Temperature gradient [K/min]	400 (> 1 l/min)		
Start-up time [s]	5...15		
Reaction time typ. [s]	0.5...10		
Compressive strength [bar]	5		
Display flow	LED-array		
Material	housing: PBT sensor: AL_2O_3 / PTFE / FPM (different materials on request)		
Protection [EN 60529]	IP 67		
Connection	M12 connector		
* c UL us LISTED E304328	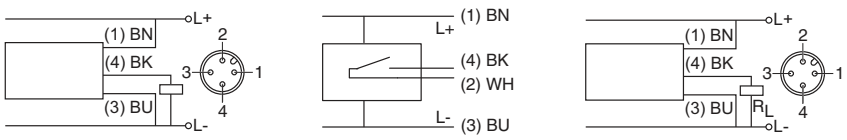		
Accessories	connecting cable type SLG, SLW, SBG, SBW, see page 1.108		

Compact model | with IO-Link

Flow measurement of waterbased liquids

Temperature measurement

Configurable via IO-Link

Use IO-Link
Universal · Smart · Easy

Design	SNS 552
Dimensions	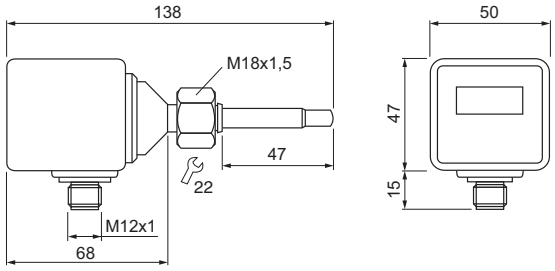
Detection range	
Flow water [m/s]	0.05...3.00
[l/min] / [m³/h]	depends on pipe diameter
Temperature [°C]	0.0...80.0
Internal pipe diameter [mm]	15...200
Output S1	⎍ / ⊸ / IO-Link PNP-NO/NC, NPN-NO/NC, IO-Link, pulse PNP-NO
Output S2	PNP-NO/NC, NPN-NO/NC, Analog 4...20 mA, input for external control signal
ID-No.	P11389
Type	SNS 552 GAPL
Supply voltage [V]	18...30 DC
Current consumption [mA]	<120
Switching current max. [mA]	≤150 (each output)
Ambient temperature [°C]	ñ10...+60
Medium temperature [°C]	0...+80
Start-up time [s]	10
Reaction time [s]	<1 (1...8 s)
Programmable functions	Hysteresis function, window function, fault monitoring, pulse output, analog output, Min-/Max-/ average value memory, customized ID, display configuration
IO-Link-Specifications	V1.1, COM2, 3.5 ms, SIO-Mode supported
Compressive strength [bar]	60
Material	housing: PBT, stainless steel sensor: AISI 316 L
Protection [EN 60529]	IP 67
Connection	M12 connector
	 figure: PNP output 2 (WH): 4...20 mA / PNP/NPN output / Input 4 (BK): PNP/NPN output / pulse output / IO-Link RL: 200...500 Ohm
Accessories	IO-Link-USB-Master-Set V1.1 (Z01216), page 1.107, screw-in adapter

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Compact | Digital display ï up to 40 l/min

Flow and temperature monitoring of water and water-glycol mixtures

Programmable

2x Switching output
Switching and analog output

Design		SDN 552... GPP			SDN 552... GAPP		
Dimensions		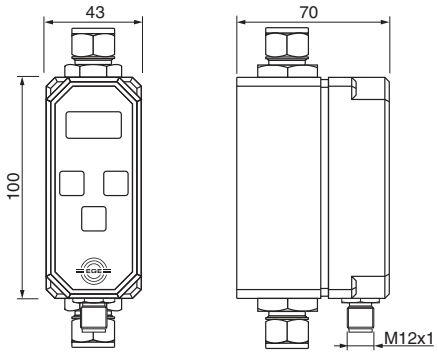			 Optional: mounting plate (Z01178)		
Medium		water / glycol (0, 5, ..., 25, 30%)					
Working range	[l/min]	1...10	2...20	4...40	1...10	2...20	4...40
Outer diameter pipe	[mm]	10	15	18	10	15	18
Pipe connection		tube fittings for steel tubes accord. to DIN 2391 / ISO 3304					
Output 1		2x PNP NC / NO, progr.			PNP NC / NO, progr. + 4...20 mA, linear		
Output 2							
ID-No.		P11293	P11294	P11295	P11296	P11297	P11298
Type		SDN 552/1 GPP	SDN 552/2 GPP	SDN 552/3 GPP	SDN 552/1 GAPP	SDN 552/2 GAPP	SDN 552/3 GAPP
Supply voltage	[V]	24 DC ±10%			24 DC ±10%		
Current consumption	[mA]	<100			<100		
Switching current max.	[mA]	200 (20 ℃)			200 (20 ℃)		
Load RL	[Ω]	ñ			200...500		
Ambient temperature	[℃]	0...+60					
Medium temperature	[℃]	ñ10...+90					
Start-up time	[s]	6...10					
Reaction time	[s]	1...8					
Programmable functions		switching point, hysteresis, switching output, time on/off delay, glycol percentage, adjustable to reference, averaging, access code					
Temperature control	[℃]	ñ10...90, alternative switching point					
Compressive strength	[bar]	20					
Material		housing: PBT sensor: AISI 316 Ti / FKM					
Protection	[EN 60529]	IP 65					
Connection		M12 connector					
							
Accessories		mounting plate, connecting cable type SLG, SLW (page 1.108), adapter G1/2, G1/4 (page 1.112)					

Inline-Compact | Digital display ï 1 l/min

Flow and temperature monitoring of water

Programmable

2x Switching output
Switching- and analog output
2x Analog output

G1/4 thread

Design	*SDN 552/5 GPP*	*SDN 552/5 GAPP*	*SDN 552/5 GAA*
Dimensions	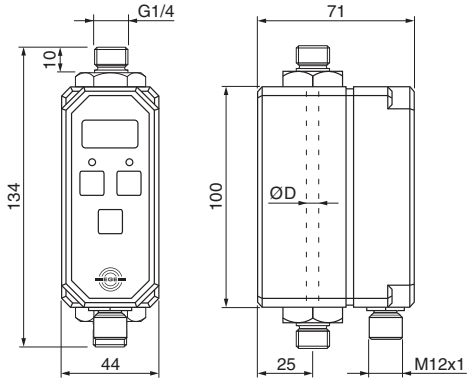		 Screw adapter (part of delivery)
Medium	water		
Working range [ml/min]	50...1000		
Inner diameter D [mm]	3.6		
Output 1	PNP NC / NO, progr.	PNP NC / NO, progr.	4...20 mA, linear
Output 2	PNP NC / NO, progr.	4...20 mA, linear	4...20 mA, linear
ID-No.	P11346	P11348	P11350
Type	SDN 552/5 GPP	SDN 552/5 GAPP	SDN 552/5 GAA
Supply voltage [C]	24 DC ±10%		
Current consumption [mA]	<100		
Switching current max. [mA]	200 (20 ℃)	200 (20 ℃)	ñ
Load RL [Ω]	ñ	200...500	200...500
Ambient temperature [℃]	0...+60		
Medium temperature [℃]	0...+60		
Start-up time [s]	6...10		
Reaction time [s]	1...8		
Programmable functions	switching point, hysteresis, NC/NO, time on/off delay, adjustable to reference, analog range, averaging, access code		
Compressive strength [bar]	10		
Material	housing: PBT sensor: AISI 316 Ti / FKM		
Protection [EN 60529]	IP 65		
Connection	M12 connector		
			
Accessories	mounting plate (Z01178), connecting plate type SLG, SLW, page 1.108		

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Compact | Digital display ï 2 l/min

Flow and temperature monitoring of water

Programmable

2x Switching output
Switching- and analog output
2x Analog output

G1/4 thread

Design	*SDN 552/6 GPP*	*SDN 552/6 GAPP*	*SDN 552/6 GAA*
Dimensions	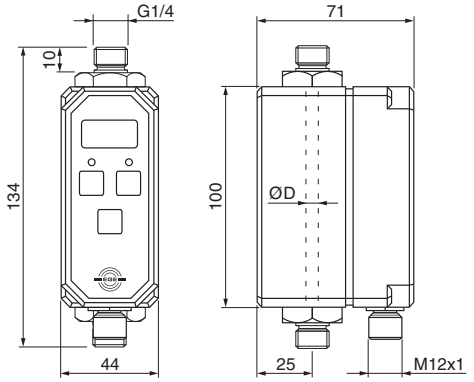		 Screw adapter (part of delivery)
Medium	water		
Working range [ml/min]	100...2000		
Inner diameter D [mm]	5,6		
Output 1	PNP NC / NO, progr.	PNP NC / NO, progr.	4...20 mA, linear
Output 2	PNP NC / NO, progr.	4...20 mA, linear	4...20 mA, linear
ID-No.	**P11347**	**P11349**	**P11351**
Type	SDN 552/6 GPP	SDN 552/6 GAPP	SDN 552/6 GAA
Supply voltage [V]	24 DC ±10%		
Current consumption [mA]	<100		
Switching current max. [mA]	200 (20 □)	200 (20 □)	ñ
Load R_L [Ω]	ñ	200...500	200...500
Ambient temperature [□C]	0...+60		
Medium temperature [□C]	0...+60		
Start-up time [s]	6...10		
Reaction time [s]	1...8		
Programmable functions	switching point, hysteresis, NC/NO, time on/off delay, adjustable to reference, analog range, averaging, access code		
Compressive strength [bar]	10		
Material	housing: PBT sensor: AISI 316 Ti / FKM		
Protection [EN 60529]	IP 65		
Connection	M12 connector		
			
Accessories	mounting plate (Z01178), connecting plate type SLG, SLW, page 1.108		

Inline-Compact | Digital display ï 100 l/min

Flow and temperature monitoring of water

Programmable

Analog outputs

G3/4 thread

Design	*SDN 552/4 GAA*
Dimensions	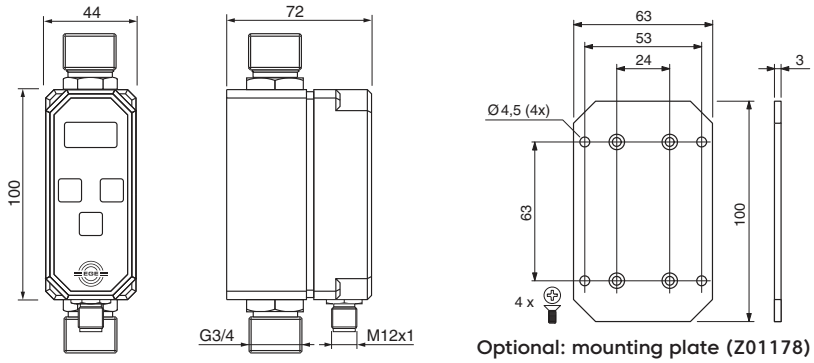 Optional: mounting plate (Z01178)
Medium	water
Detection range	flow water: 10...100 l/min temperature: 0...+90 °C
Connection	G3/4
Output	flow: 4...20 mA, linear temperature: 4...20 mA, linear
ID-No.	P11335
Type	SDN 552/4 GAA
Supply voltage [V]	24 DC ±10%
Current consumption [mA]	<100
Load R_L [Ω]	200...500
Ambient temperature [°C]	0...+60
Medium temperature [°C]	0...+90
Start-up time [s]	6...10
Reaction time [s]	1...8
Programmable functions	adjustable to reference, averaging, display flow / temperature, access code
Compressive strength [bar]	20
Material	housing: PBT sensor: AISI 316 Ti / FKM
Protection [EN 60529]	IP 65
Connection	M12 connector
	
Accessories	mounting plate (Z01178), connecting cable type SLG, SLW, page 1.108

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Compact | Digital display ï up to 40 l/min

Flow and temperature monitoring of water and water-glycol mixtures

Programmable

2x Switching output
2x Analog output

Design	*SDN 554... GPP*			*SDN 552... GAA*		
Dimensions	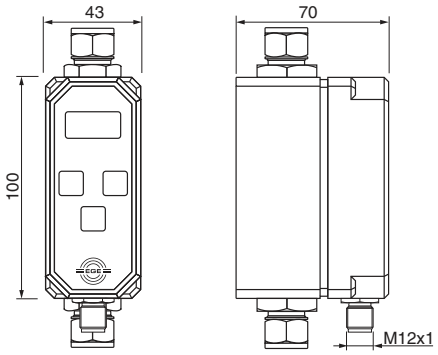			 Optional: mounting plate (Z01178)		
Medium	water / glycol (0, 5, ..., 25, 30%)					
Working range [l/min]	1...10	2...20	4...40	1...10	2...20	4...40
Outer diameter pipe [mm]	10	15	18	10	15	18
Pipe connection	tube fittings for steel tubes accord. to DIN 2391 / ISO 3304					
Output flow	2x PNP NC / NO, progr.			4...20 mA, linear		
Output temperature	2x PNP NC / NO, progr.			4...20 mA, linear		
ID-No.	**P11313**	**P11314**	**P11315**	**P11316**	**P11317**	**P11318**
Type	SDN 554/1 GPP	SDN 554/2 GPP	SDN 554/3 GPP	SDN 552/1 GAA	SDN 552/2 GAA	SDN 552/3 GAA
Supply voltage [V]	24 DC ±10%			24 DC ±10%		
Current consumption [mA]	<100			<100		
Switching current max. [mA]	100 (20) each output			ñ		
Load RL [Ω]	ñ			200...500		
Ambient temperature [C]	0...+60					
Medium temperature [C]	ñ10...+90					
Temperature gradient [K/min]	400					
Start-up time [s]	6...10					
Reaction time [s]	1...8					
Programmable functions	glycol percentage, adjustable to reference, averaging, access code. only SDN 554: switching point, hysteresis, switching output, time on/off delay					
Temperature control [C]	ñ9.8...90, 2 switching points			ñ10...90, analog, programmable		
Compressive strength [bar]	20					
Material	housing: PBT sensor: AISI 316 Ti / FKM					
Protection [EN 60529]	IP 65					
Connection	M12 connector					
	 1: BN 2: WH 3: BU 4: BK 5: GY 6: PK  					
Accessories	mounting plate, connecting cable type SLG, SLW (page 1.108), adapter G1/2, G1/4 (page 1.112)					

Magnetic flowmeter | Digital display

Magnetic flowmeter

Measurement error < 2%

Programmable

Analog and PNP output

Design	*SDI... GAPP*	
Dimensions	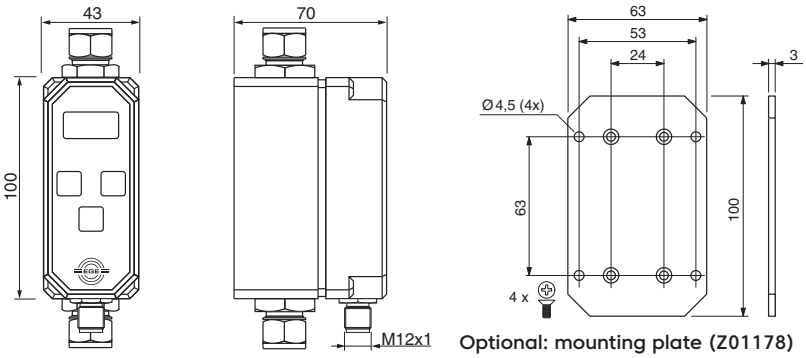 Optional: mounting plate (Z01178)	
Working range [l/min]	0...40	0.2...80
Measurement error	0...5.0 l/min ≤ 0.1 l/min 5.1...40.0 l/min ≤ 2% of measurement value *	0...10.0 l/min ≤ 0.2 l/min 10.1...80.0 l/min ≤ 2% of measurement value *
ID-No.	**P11320**	**P11321**
Type	SDI 852/1 GAPP	SDI 852/2 GAPP
Outer diameter pipe [mm]	10	15
Pipe connection	tube fittings for steel tubes accord. to DIN 2391 / ISO 3304	
Output	PNP NC / NO, programmable	4...20 mA, linear
Supply voltage [V]	24 DC ±10%	
Current consumption [mA]	<100	
Switching current max. [mA]	200 (20 °C)	
Load RL [Ω]	200...500	
Ambient temperature [°C]	0...+60	
Medium temperature [°C]	5...+60	
Medium conductivity [µS/cm]	≥ 10 (water: ≥ 15)	≥ 20 (water: ≥ 30)
Reaction time [s]	0.5...8	
Programmable functions	switching point, hysteresis, switching output, time on/off delay, analog range, averaging, access code	
Compressive strength [bar]	10	
Material	housing: PBT sensor: PVDF / AISI 316 Ti	
Protection [EN 60529]	IP 65	
Connection	M12 connector	
*Note: Reference conditions according to EN 29104		
Accessories	mounting plate, connecting cable type SLG, SLW (page 1.108), adapter G1/4 (page 1.112)	

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Magnetic flowmeter | Digital display

Magnetic flowmeter

Measurement error < 2%

Programmable

Analog and PNP output
Impulse output

Design	*SDI... GAPP*	
Dimensions	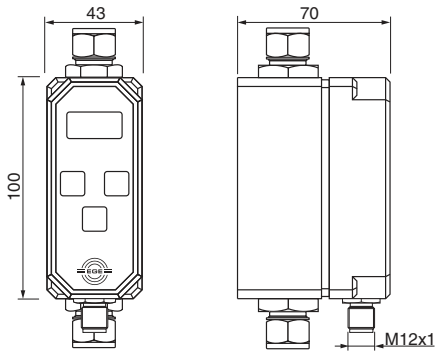	 Optional: mounting plate (Z01178)
Working range [l/min]	0...40	0,2...80
Measurement error	0...5.0 l/min ≤ 0.1 l/min 5.1...40.0 l/min ≤ 2% of measurement value*	0...10.0 l/min ≤ 0.2 l/min 10.1...80.0 l/min ≤ 2% of measurement value*
ID-No.	**P11322**	**P11323**
Type	SDI 853/1 GAPP	SDI 853/2 GAPP
Pulse output [1] [ml/pulse]	"5 (1 ms), 10 (5 ms), 50 (5 ms) programmable	
Outer diameter pipe [mm]	10	15
Pipe connection	tube fittings for steel tubes accord. to DIN 2391 / ISO 3304	
Output	PNP NC / NO, programmable	4...20 mA, linear
Supply voltage [V]	24 DC ±10%	
Current consumption [mA]	100	
Switching current max. [mA]	200	
Load R_L [Ω]	200...500	
Ambient temperature [°C]	0...+60	
Medium temperature [°C]	5...+60	
Medium conductivity [µS/cm]	≥ 10 (water: ≥ 15)	≥ 20 (water: ≥ 30)
Reaction time [s]	0.5...8	
Programmable functions	switching point, hysteresis, switching output, time on/off delay, analog range, impulse, averaging, access code	
Compressive strength [bar]	10	
Material	housing: PBT sensor: PVDF / AISI 316 Ti	
Protection [EN 60529]	IP 65	
Connection	M12 connector	
*Note: Reference conditions according to EN 29104		
Accessories	mounting plate, connecting cable type SLG, SLW (page 1.108), adapter G1/4 (page 1.112)	

Probe | Screw-in mounting

G1/2 thread

Stainless steel

Design	*G1/2*	*G1/2*
Dimensions		
Detection range [m/s]	0.5...30	0.5...30
Sensor length [mm]	48	48
ID-No.	**P11100**	**P11101**
Type	LTZ 421 K-A2	LTZ 421 S-A2
Medium temperature [°C]	ñ20...+80	
Temperature gradient [K/min]	20 (>10 m/s)	
Start-up time typ. [s]	10...90	
Reaction time typ. [s]	2...30	
Switching-off time [s]	5...30	
Compressive strength [bar]	30	
Sensor material	AISI 316 Ti ï different materials on request	
Protection [EN 60529]	IP 68	IP 67
Connection	2 m PVC-cable 4x0.25 mm²	M12 connector



1: BN
2: WH
3: BU
4: BK







Amplifiers required: SKZ..., SKM..., page 1.75 - 1.79

Accessories	connecting cable type SLG 4-2, SLG 4-5, SLW 4-2, SLW 4-5, see page 1.108

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models

DC 24 V

PNP output
Analog output

LED display

Detection range 0.5...15 m/s

Design		*ÿ 20 mm*		*M18x1*	
Dimensions					
Detection range	[m/s]	0.5...15		0.5...15	
Output		PNP	4...20 mA	PNP	4...20 mA
ID-No.		P11096*	P11097*	P11237*	P11240*
Type		LN 520 GSP	LN 520 GA	LG 518 GSP	LG 518 GA
Supply voltage	[V]	24 DC ±20%	24 DC ±20%	24 DC ±20%	24 DC ±20%
Current consumption	[mA]	< 70	< 70	< 70	< 70
Switching current max.	[mA]	200	ñ	200	ñ
Load R_L	[Ω]	ñ	200...500	ñ	200...500
Ambient temperature	[°C]	ñ20...+70			
Temperature gradient	[K/min]	200 (>10 m/s)			
Start-up time	[s]	20...40			
Reaction time typ.	[s]	2	3	2	3
Hosuing material		PBT	PBT	PBT / Br-Ni	PBT / Br-Ni
Display flow		LED			
Protection	[EN 60529]	IP 67			
Connection		2 m PVC-cable 3x0.5 mm²			

* c UL us LISTED
E304328







Accessories	flange ÿ 20 mm (Z01106), see page 1.111

Compact models | IO-Link

DC 18...30 V

PNP output
Parametrable via IO-Link interface

Detection range
Air flow 0,5...15 m/s
Temperature ñ20...70 ÌC

Use IO-Link
Universal · Smart · Easy

Design	*ÿ 20 mm*	*M18x1*
Dimensions		
Detection range		
Air flow [m/s]	0.5...15.0	0.5...15.0
Temperature [Ì]	ø 0.0...70.0*	ø 0.0...70.0*
Ouput	/ / IO-Link PNP-NO/NC, IO-Link	/ / IO-Link PNP-NO/NC, IO-Link
ID-No.	**P11432**	**P11431**
Type	LN 520 GPL	LG 518 GPL
Process data		
Air flow [% x 0.1]	0...1000	0...1000
Temperature [Ì x 0.1]	ø 00...700	ø 00...700
Supply voltage [V]	18...30 DC	18...30 DC
Current consumption [mA]	≤ 40	≤ 40
Switching current [mA]	≤150	≤150
Ambient temperature [ÌC]	ñ20...+70	ñ20...+70
Start-up time [s]	20...40	20...40
Reaction time		
flow change [s]	2...20	2...20
temperature change* [s]	<15	<15
Housing material	PBT, PSU	Br-Ni, PBT, PSU
Display flow / IO-Link	4-colour-LED (red, yellow, green, blue)	4-Farben-LED (red, yellow, green, blue)
Protection [EN 60529]	IP 67	IP 67
Connection	2 m PVC-cable 3x0.5 mm²	2 m PVC-cable 3x0.5 mm²

* to reduce the measuring error due to self-heating of the measuring element, a minimum air flow of 5 m/s is required.





Accessories	flange ÿ 20 mm (Z01106), see page 1.111

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models | Screw-in mounting

DC 24 V

Analog output

G1/2 thread

Design	G1/2	
Dimensions	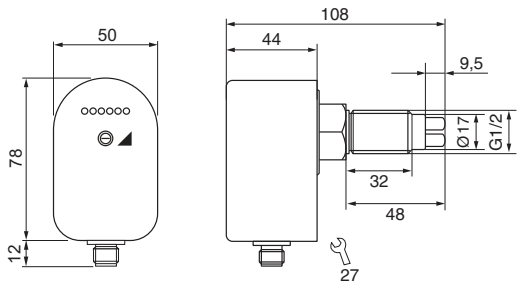	
Detection range [m/s]	0.5...30	
Output	4...20 mA	
ID-No.	P11110*	P11111*
Type	LNZ 450 GA-K	LNZ 450 GA-S
Supply voltage [V]	24 DC ±15 %	
Current consumption [mA]	< 80	
Current output [mA]	4...20	
Load R_L [Ω]	200...500	
Ambient temperature [°C]	ñ20...+70	
Medium temperature [°C]	ñ20...+80	
Temperature gradient [K/min]	20 (>15 m/s)	
Start-up time typ. [s]	20...90	
Reaction time typ. [s]	4...30	
Compressive strength [bar]	30	
Sensor material	AISI 303	
Display flow	LED-array	
Protection [EN 60529]	IP 67	
Connection	2 m PVC-cable 3x0.5 mm²	M12 connector
*c UL us LISTED E304328	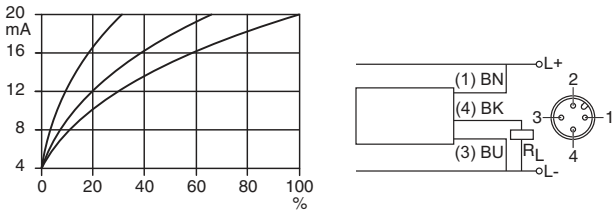	
Accessories	connecting cable type SLG 3-2, SLG 3-5, SLW 3-2, SLW 3-5, see page 1.108	

Compact models | Screw-in mounting

DC 24 V

PNP output

G1/2 thread

Design	*G1/2*	
Dimensions	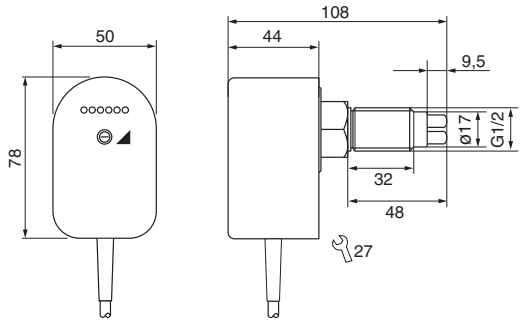	
Detection range [m/s]	0.5...30	
Output	PNP	
ID-No.	**P11136***	**P11135***
Type	LNZ 450 GSP-S	LNZ 450 GSP-K
Supply voltage [V]	24 DC ±20%	
Current consumption [mA]	< 60	
Switching current [mA]	400 (20 ℃)	
Ambient temperature [℃]	ñ20...+70	
Medium temperature [℃]	ñ20...+80	
Temperature gradient [K/min]	20 (>15 m/s)	
Start-up time typ. [s]	10...90	
Reaction time typ. [s]	2...30	
Compressive strength [bar]	30	
Sensor material	AISI 303 ï different materials on request	
Housing material	PBT	
Display flow	LED-array	
Protection [EN 60529]	IP 67	
Connection	M12 connector	2 m PVC-cable 3x0.5 mm²

*c UL us LISTED
E304328



Accessories	connecting cable type SLG 3-2, SLG 3-5, SLW 3-2, SLW 3-5, see page 1.108

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models | Screw-in mounting

AC 230 V ï AC 115 V ï DC 24 V

Relay output

G1/2 thread

Design		G1/2		G1/2	
Dimensions		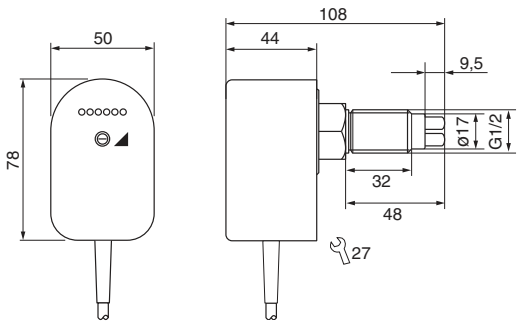			
Detection range	[m/s]	0.5...30		0.5...30	0.5...30
Output		Relay		Relay	Relay
ID-No.		P11102	P11103	P11104	P11105
Type		LNZ 450 WR1-K	LNZ 450 WR2-K	LNZ 450 GR-K	LNZ 450 GR-S
Supply voltage	[V]	115 AC ±15%	230 AC ±15%	24 DC ±20%	
Current consumption	[mA]	< 60	< 30	< 80	
Switching voltage max.	[V]	250 AC / 60 DC		250 AC / 60 DC	30 AC / 36 DC
Switching current max.	[A]	4 AC / 4 DC		4 AC / 4 DC	1 AC / 1 DC
Switching power max.		1000 VA / 60 W		1000 VA / 60 W	ñ
Ambient temperature	[C]	ñ20...+70		ñ20...+70	
Medium temperature	[C]	ñ20...+80		ñ20...+80	
Temperature gradient	[K/min]	20 (>15 m/s)		20 (>15 m/s)	
Start-up time typ.	[s]	10...90		10...90	
Reaction time typ.	[s]	2...30		2...30	
Compressive strength	[bar]	30		30	
Sensor material		AISI 303		AISI 303	
Housing material		PBT		PBT	
Display flow		LED-array		LED-array	
Protection	[EN 60529]	IP 67		IP 67	
Connection		2 m PVC-cable 5x0.5 mm²		2 m PVC-cable 5x0.5 mm²	M12 connector
 1: BN 2: WH 3: BU 4: BK					
Accessories		connecting cable type SLG 4-2, SLG 4-5, SLW 4-2, SLW 4-5, see page 1.108			

Compact models | Sleeve mounting

AC 230 V ï AC 115 V ï DC 24 V

Relay output

Suitable for assembly thread pieces

Design	*G1*		*G1*	
Dimensions	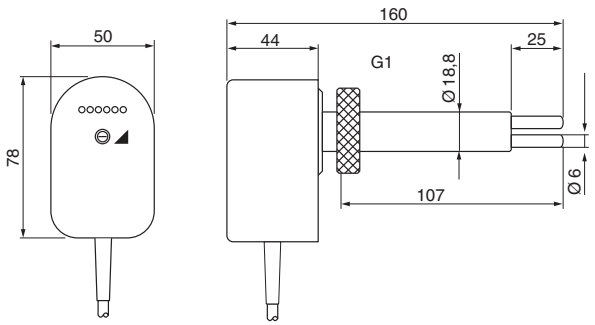			
Detection range [m/s]	0.5...30		0.5...30	0.5...30
Output	Relay		Relay	Relay
ID-No.	**P11106**	**P11107**	**P11108**	**P11109**
Type	LN 450 WR1-K	LN 450 WR2-K	LN 450 GR-K	LN 450 GR-S
Supply voltage [V]	115 AC ±15%	230 AC ±15%	24 DC ±20%	
Current consumption [mA]	< 60	< 30	< 80	
Switching voltage max. [V]	250 AC / 60 DC		250 AC / 60 DC	30 AC / 36 DC
Switching current max. [A]	4 AC / 4 DC		4 AC / 4 DC	1 AC / 1 DC
Switching power max.	1000 VA / 60 W		1000 VA / 60 W	ñ
Ambient temperature [ÐC]	ñ20...+70		ñ20...+70	
Medium temperature [ÐC]	ñ20...+80		ñ20...+80	
Temperature gradient [K/min]	20 (>15 m/s)		20 (>15 m/s)	
Start-up time typ. [s]	10...90		10...90	
Reaction time typ. [s]	2...30		2...30	
Compressive strength [bar]	3		3	
Sensor material	AISI 303 / Delrin		AISI 303 / Delrin	
Housing material	PBT		PBT	
Display flow	LED-array		LED-array	
Protection [EN 60529]	IP 67		IP 67	
Connection	2 m PVC-cable 5x0.5 mm²		2 m PVC-cable 5x0.5 mm²	M12 connector
	 1: BN 2: WH 3: BU 4: BK			 
Accessories	thread sleeve A 50..., see page 1.111			

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Compact models | Sleeve mounting

DC 24 V

PNP output

Suitable for assembly thread pieces

Design	G1	
Dimensions	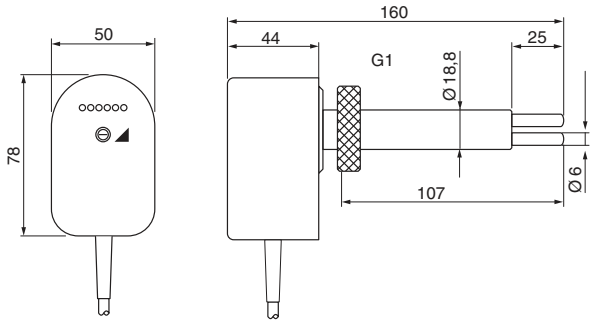	
Detection range [m/s]	0.5...30	
Output	PNP	
ID-No.	**P11137***	**P11134***
Type	LN 450 GSP-S	LN 450 GSP-K
Supply voltage [V]	24 DC ±20%	
Current consumtion [mA]	< 60	
Switching current max. [mA]	400 (20 ℃)	
Ambient temperature [℃]	ñ20...+70	
Medium temperature [℃]	ñ20...+80	
Temperature gradient [K/min]	20 (>15 m/s)	
Start-up time typ. [s]	10...90	
Reaction time typ. [s]	2...30	
Compressive strength [bar]	3	
Sensor material	AISI 303 / Delrin	
Housing material	PBT	
Display flow	LED-array	
Protection [EN 60529]	IP 67	
Connection	M12 connector	2 m PVC-cable 3x0.5 mm²
*c UL us LISTED E304328		
Accessories	thread sleeve A 50..., see page 1.111	

Compact models | Sleeve mounting

DC 24 V

Analog output

Suitable for assembly thread pieces

Design	*G1*	
Dimensions	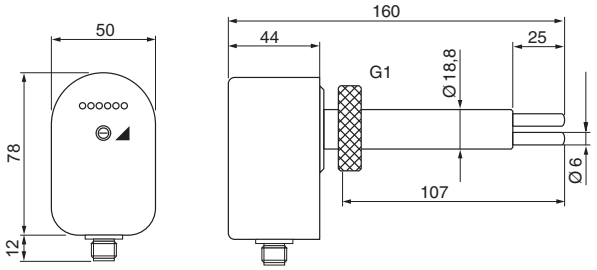	
Detection range [m/s]	0.5...30	
Output	4...20 mA	
ID-No.	**P11098***	**P11099***
Type	LN 450 GA-K	LN 450 GA-S
Supply voltage [V]	24 DC ±15%	
Current consumption [mA]	< 80	
Current output [mA]	4...20	
Load R_L [Ω]	200...500	
Ambient temperature [°C]	ñ20...+70	
Medium temperature [°C]	ñ20...+80	
Temperature gradient [K/min]	20 (>15 m/s)	
Start-up time typ. [s]	20...90	
Reaction time typ. [s]	4...30	
Compressive strength [bar]	3	
Sensor material	AISI 303 / Delrin	
Display flow	LED-array	
Protection [EN 60529]	IP 67	
Connection	2 m PVC-cable, 3x0.5 mm²	M12 connector
*c UL us LISTED E304328		
Accessories	thread sleeve A 50..., see page 1.111	

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Inline-Compact

DC 24 V

PNP output
Relay output
Analog output

G1/4 thread ï ÿ 9 mm

Compressed-air monitoring

Design	*G1/4 ï ÿ 9 mm*		
Dimensions	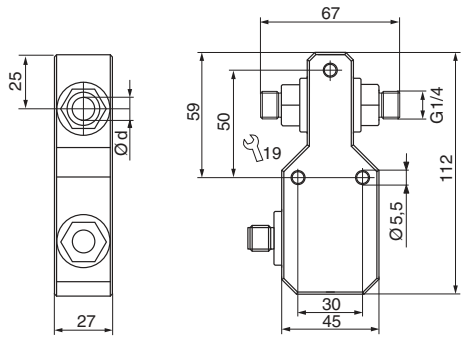		
Detection range [m/s]	0.2...60		
Working range [m/s]	0.5...40		
Inner diameter d [mm]	9		
Output	PNP	Relay	4...20 mA, non linear
ID-No.	P11299*	P11300	P11301*
Type	LDN 510 GSP	LDN 510 GR	LDN 510 GA
Supply voltage [V]	24 DC ±10%	24 DC ±10%	24 DC ±10%
Current consumption [mA]	< 50	< 50	< 50
Switching current max. [mA]	200 (20 °C)	1000	ñ
Switching voltage max. [V]	ñ	30 AC / 36 DC	ñ
Load RL [Ω]	ñ	ñ	200...500
Ambient temperature [°C]	0...+60		
Medium temperature [°C]	ñ20...+80		
Temperature gradient [K/min]	20 (>20 m/s)		
Start-up time typ. [s]	10...30		
Reaction time typ. [s]	1...20		
Compressive strength [bar]	20		
Display flow	LED-array		
Material	housing: PBT sensor: AISI 316 Ti		
Protection [EN 60529]	IP 67		
Connection	M12 connector		
* c UL us LISTED E304328			
Accessories	connecting cable type SLG, SLW, SBG, SBW, see page 1.108		

Air flow sensor | with IO-Link

Mass flow measurement

Configurable via IO-Link

Compressed air measurement

Monitoring of temperature

Use IO-Link
Universal · Smart · Easy

Design	G1/4

Dimensions

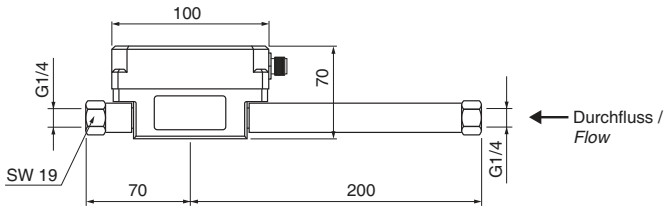

Detection ranges air		
Flow[1]	[Nm³/h] [Nl/min]	0.04...15.00 / 0.5...250.0
Temperature	[°C]	0.0...60.0
Output		/ / / IO-Link PNP/NPN-NO/NC 200 mA (20 °C) / 4...20 mA / pulse output PNP/NPN-NO / IO-Link
ID-No.		P11373
Type		LDN 1009 GAPL
Process data		
Consumption	[Nm³ x 0.001]	0...999999 x 10⁶
Flow	[Nm³/h x 0.01]	0...1500
Temperature	[°C x 0.1]	0...600
Measurement error		flow: ± (4 % of measurement value + 0.5 % of end value) / temperature: ± 2 °C
Supply voltage	[V]	18...30 DC
Current consumption	[mA]	< 70
Ambient temperature	[°C]	0...+60
Medium temperature	[°C]	0...+60
Start-up time / Reaction time	[s]	4...12 / < 0.3
Adjustable parameters		output functions, switching points, units, range, average value, MIN/MAX value
IO-Link-Specifications		revision 1.1, baud rate COM 2, min. cycle time 5 ms, process data 8 Byte
Compressive strength	[bar]	16
Material		housing: PBT-GF30 sensor: aluminium, stainless steel, ceramic, PA
Protection	[EN 60529]	IP 54
Connection		M12 connector

[1] Reference 1013 mbar / 20 °C



figure: PNP output

2 (WH): 4...20 mA / PNP/NPN output / Input
4 (BK): PNP/NPN output / pulse output / IO-Link
RL: 200...500 Ohm

Accessories	Mounting plate 72 x 63 x 3 (Z01217), IO-Link / USB master set (Z01216), page 1.107

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Amplifiers DC | Relay output

DC 24 V

Relay output

LED display

DIN rail mounting

Design	*SKM 420 GR*	*SKM 421 GR (air flow)*
Dimensions		
ID-No.	**P10530**	**P11067**
Type	SKM 420 GR	SKM 421 GR (air flow)
Output	Relay	Relay
Supply voltage [V]	24 DC ±20%	
Output	Relay / NO	
Switching voltage max. [V]	230 AC / 30 DC	
Switching current max. [A]	1 AC / 1 DC	
Switching power max.	125 VA	
Load R_L [Ω]	ñ	
Ambient temperature [□C]	ñ20...+60	
Protection [EN 60529]	terminal: IP 20 / housing: IP 40	
Amplifier for probe	STA..., STB..., STC..., STD..., STK..., ST... (none Ex)	LTZ...

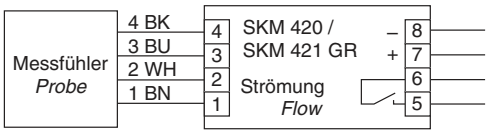

Amplifiers DC | PNP output ï Analog output

DC 24 V

PNP output
Analog output

LED display

Design	*SKM 420 GSP*	*SKM 421 GSP (air flow)*	*SKM 420 GA*
Dimensions			
ID-No.	**P11392**	**P11393**	**P10820**
Type	SKM 420 GSP	SKM 421 GSP	SKM 420 GA
Output	PNP	PNP	4...20 mA
Supply voltage [V]	24 DC ±20%		24 DC ±10%
Switching current max. [mA]	400 (20 ℃)		ñ
Load R_L [Ω]	ñ		50...500
Ambient temperature [℃]	ñ20...+60		ñ20...+60
Protection [EN 60529]	terminal: IP 20 / housing: IP 40		
Amplifier for probe	STA..., STB..., STC..., STD..., STK..., ST... (none Ex)	LTZ...	ST... / LTZ... (none Ex)



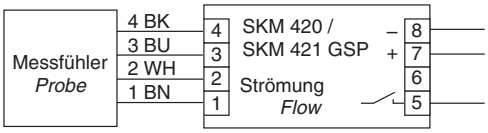

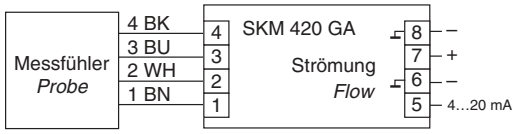

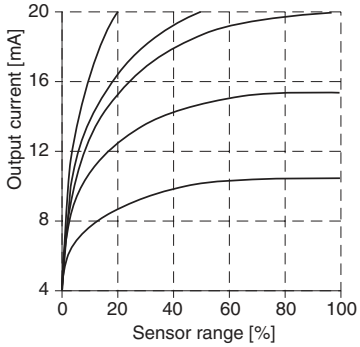

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Amplifiers DC | Relay output

DC 24 V

Relais output

LED display

ST 5021...
SD 5004 S/SD 5010 S

Design	*SKM 520 GR*
Dimensions	
ID-No.	**P11391**
Type	SKM 520 GR
Output	Relay
Supply voltage [V]	24 DC ±20%
Output	Relay / NO
Switching voltage max. [V]	230 AC / 30 DC
Switching current max. [A]	1 AC / 1 DC
Switching power max.	125 VA
Load RL [Ω]	ñ
Ambient temperature [□C]	ñ20...+60
Protection [EN 60529]	terminal: IP 20 / housing: IP 40
Amplifier for probe	ST 5021..., SD 5004, SD 5010

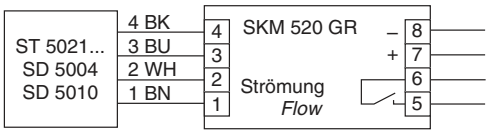

Amplifiers AC/DC | Automatic adjustment

AC 85 V...AC 260 V
DC 24 V

Relay output

Programming with push-buttons

Automatic adjustment

Design	*SKM 522 WR*	*SKM 522 GR*
Dimensions	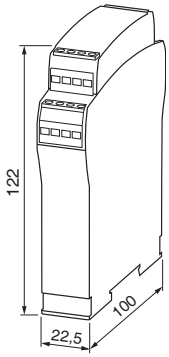	
ID-No.	**P11336**	**P11337**
Type	SKM 522 WR	SKM 522 GR
Output	Relay	Relay
Supply voltage [V]	85 AC...260 AC	24 DC ±20%
Turn off delay [s]	0...20 programmable	
Output	2x relay / change-over	
Switching voltage max. [V]	250 AC / 60 DC	
Switching current max. [A]	4 AC / 4 DC	
Switching power max.	1000 VA / 60 W	
Ambient temperature	ñ20...+60	
Additional functions	cable break monitoring, turn off delay, supply voltage monitoring	
Protection [EN 60529]	terminal: IP 20 / housing: IP 40	
Connection	terminal screws	
Amplifier for probe	STA..., STB..., STC..., STD..., STK..., ST... (none Ex), LTZ...	

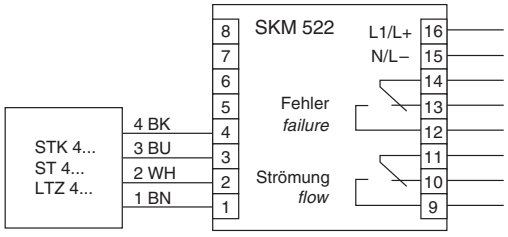

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Amplifiers AC/DC | Potentiometer

AC 230 V ï AC 115 V ï DC 24 V

Relay output

LED display

Temperature control

Turn off delay

Design	*SKZ 400 WR*	*SKZ 400 WR-115*	*SKZ 400 GR*
Dimensions			

ID-No.	P10501	P10502	P10503
Type	SKZ 400 WR	SKZ 400 WR -115	SKZ 400 GR
Output	Relay	Relay	Relay
Supply voltage [V]	230 AC ±10%	115 AC ±10%	24 DC ±20%
Temperature [°C]	ñ20...+100 adjustable		
Turn off delay [s]	0...25 adjustable		
Output	2x relay / change-over		
Switching voltage max. [V]	250 AC / 60 DC		
Switching current max. [A]	4 AC / 4 DC		
Switching power max.	1000 VA / 60 W		
Ambient temperature [°C]	ñ20...+60		
Protection [EN 60529]	terminal: IP 20 / housing: IP 40		
Connection	terminal screws		

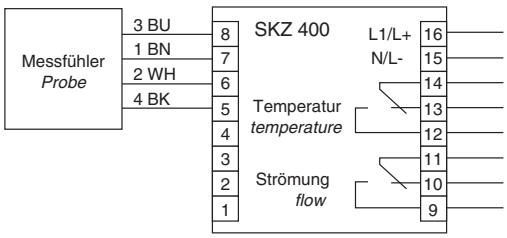

Notes

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Probes
Compact models
Amplifiers

-Probe | Device category 1G, 1G/2G und 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

Design	*G1/4*	*G1/2*	*G1/2*	*NPT1/2*	*G3/4*
Dimensions					
Detection range [cm/s]	water 1...100 / oil 3...200				
Sensor length [mm]	25	31	48	40	48
Connection	plug	plug	plug	plug	plug
ID-No.	P11164	P11165	P11166	P11167	P11169
Type	STS 101 S	STS 102 S	STS 103 S	STS 104 S	STS 106 S
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20				
Certificate No.	T< V 98 ATEX 1298 X				
Ex marking	Gas: II 1 G Ex ia IIC T6...T3 Ga / II 1/2 G Ex ia IIC T6...T3 Ga/Gb Dust: II 1 D Ex ia IIIC T125 Da				
Ambient temperature and medium temperature [C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +85 T3: ñ20 ≤ Ta ≤ +85 Dust: ñ20 ≤ Ta ≤ +85				
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH				
Start-up time typ. [s]	8 (2...18)				
Reaction time typ. [s]	2 (1...13)				
Compressive strength [bar]	60				
Housing material	AISI 316 Ti ï different materials on request				
Protection [EN 60529]	IP 67				
Connection	M12 connector				





Observe specific conditions for use in section "Technique and application" on page 1.13

Note:	for the connection to amplifier SZAb..., page 1.100-1.101

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Probe | Device category 1G, 1G/2G und 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

Design	*G1/4*	*G1/2*	*G1/2*	*NPT1/2*	*G3/4*
Dimensions					
Detection range [cm/s]	water 1...100 / oil 3...200				
Sensor length [mm]	25	31	48	40	48
Connection	fixed cable	fixed cable	fixed cable	fixed cable	fixed cable
ID-No.	**P11140**	**P11141**	**P11142**	**P11143**	**P11168**
Type	STS 101 K	STS 102 K	STS 103 K	STS 104 K	STS 106 K
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20				
Certificate No.	T< V 98 ATEX 1298 X				
Ex marking	Gas: II 1 G Ex ia IIC T6...T3 Ga / II 1/2 G Ex ia IIC T6...T3 Ga/Gb Dust: II 1 D Ex ia IIIC T125 Da				
Ambient temperature and medium temperature [C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +85 T3: ñ20 ≤ Ta ≤ +85 Dust: ñ20 ≤ Ta ≤ +85				
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH				
Start-up time typ. [s]	8 (2...18)				
Reaction time typ. [s]	2 (1...13)				
Compressive strength [bar]	60				
Housing material	AISI 316 Ti ï different materials on request				
Protection [EN 60529]	IP 67				
Connection	2 m PUR-cable 4x0.25 mm²				
					
	Observe specific conditions for use in section "Technique and application" on page 1.13				
Note:	for the connection to amplifier SZAb..., page 1.100-1.101				

Ex-Probe | Device category 1G, 1G/2G und 1D

Ex-Device category 1G
Installation in Zone 0 (gas)

Ex-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

Ex-Device category 1D
Installation in Zone 20 (dust)

Extended temperature range
up to 120 °C

Design	*G1/4*	*G1/2*	*G1/2*	*NPT1/2*	*G3/4*
Dimensions					
Detection range [cm/s]	water 1...100 / oil 3...200				
Sensor length [mm]	25	31	48	40	48
Connection	fixed cable	fixed cable	fixed cable	fixed cable	fixed cable
ID-No.	**P11409**	**P11410**	**P11411**	**P11412**	**P11413**
Type	STS 101 KH	STS 102 KH	STS 103 KH	STS 104 KH	STS 106 KH
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20				
Certificate No.	T< V 98 ATEX 1298 X				
Ex marking	Gas: Ex II 1 G Ex ia IIC T6...T3 Ga Ex II 1/2 G Ex ia IIC T6...T3 Ga/Gb Dust: Ex II 1 D Ex ia IIIC T125 °C Da				
Ambient temperature and medium temperature [°C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +90 T3: ñ20 ≤ Ta ≤ +120 Dust: ñ20 ≤ Ta ≤ +85				
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH				
Start-up time typ. [s]	8 (2...18)				
Reaction time typ. [s]	2 (1...13)				
Compressive strength [bar]	60				
Housing material	AISI 316 Ti ï different materials on request				
Protection [EN 60529]	IP 67				
Connection	2 m FEP-cable 4x0.25 mm²				



Observe specific conditions for use in section "Technique and application" on page 1.13

Note:	for the connection to amplifier SZAb..., page 1.100-1.101

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Probe | Device category 2G and 2D

-Device category 2G
Installation in Zone 1 (gas)

-Device category 2D
Installation in Zone 21 (dust)

Design	G1/4	G1/2	G1/2	NPT1/2	G3/4
Dimensions					
Detection range [cm/s]	water 1...100 / oil 3...200				
Sensor length [mm]	25	31	48	40	48
Connection	plug	plug	plug	plug	plug
ID-No.	**P11170**	**P11171**	**P11172**	**P11173**	**P11175**
Type	ST 101 S	ST 102 S	ST 103 S	ST 104 S	ST 106 S
Ex area of use	Gas: Zone 1 / Dust: Zone 21				
Certificate No.	T< V 97 ATEX 1218				
Ex marking	Gas: II 2 G Ex ib IIC T6...T3 Gb Dust: II 2 D Ex ib IIIC T125 Db				
Ambient temperature and medium temperature [C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +85 T3: ñ20 ≤ Ta ≤ +85 Dust: ñ20 ≤ Ta ≤ +85				
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH				
Start-up time typ. [s]	8 (2...18)				
Reaction time typ. [s]	2 (1...13)				
Compressive strength [bar]	60				
Housing material	AISI 316 Ti ï different materials on request				
Protection [EN 60529]	IP 67				
Connection	M12 connector				



1: BN
2: WH
3: BU
4: BK



(probes with cable length > 2 m are available on request)

Note:	for the connection to amplifier SZAb..., page 1.100-1.101

-Probe | Device category 2G and 2D

-Device category 2G
Installation in Zone 1 (gas)

-Device category 2D
Installation in Zone 21 (dust)

Design	G1/4	G1/2	G1/2	NPT1/2	G3/4
Dimensions					
Detection range [cm/s]	water 1...100 / oil 3...200				
Sensor length [mm]	25	31	48	40	48
Connection	fixed cable	fixed cable	fixed cable	fixed cable	fixed cable
ID-No.	P11144	P11145	P11146	P11147	P11174
Type	ST 101 K	ST 102 K	ST 103 K	ST 104 K	ST 106 K
Ex area of use	Gas: Zone 1 / Dust: Zone 21				
Certificate No.	T< V 97 ATEX 1218				
Ex marking	Gas: II 2 G Ex ib IIC T6...T3 Gb				
	Dust: II 2 D Ex ib IIIC T125 Db				
Ambient temperature and medium temperature [C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +85 T3: ñ20 ≤ Ta ≤ +85				
	Dust: ñ20 ≤ Ta ≤ +85				
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH				
Start-up time typ. [s]	8 (2...18)				
Reaction time typ. [s]	2 (1...13)				
Compressive strength [bar]	60				
Housing material	AISI 316 Ti ï different materials on request				
Protection [EN 60529]	IP 67				
Connection	2 m PUR-cable 4x0.25 mm²				
	 (probes with cable length > 2 m are available on request)				
Note:	for the connection to amplifier SZAb..., page 1.100-1.101				

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Probe | Device category 2G and 2D

-Device category 2G
Installation in Zone 1 (gas)

-Device category 2D
Installation in Zone 21 (dust)

Extended temperature range
up to 120 °C

Design	*G1/4*	*G1/2*	*G1/2*	*NPT1/2*	*G3/4*
Dimensions					
Detection range [cm/s]	water 1...100 / oil 3...200				
Sensor length [mm]	25	31	48	40	48
Connection	fixed cable	fixed cable	fixed cable	fixed cable	fixed cable
ID-No.	**P11176**	**P11178**	**P11180**	**P11182**	**P11184**
Type	ST 101 KH	ST 102 KH	ST 103 KH	ST 104 KH	ST 106 KH
Ex area of use	Gas: Zone 1 / Dust: Zone 21				
Certificate No.	T< V 97 ATEX 1218				
Ex marking	Gas: II 2 G Ex ib IIC T6...T3 Gb Dust: II 2 D Ex ib IIIC T125 °C Db				
Ambient temperature and medium temperature [°C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +90 T3: ñ20 ≤ Ta ≤ +120 Dust: ñ20 ≤ Ta ≤ +85				
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH				
Start-up time typ. [s]	8 (2...18)				
Reaction time typ. [s]	2 (1...13)				
Compressive strength [bar]	60				
Housing material	AISI 316 Ti ï different materials on request				
Protection [EN 60529]	IP 67				
Connection	2 m FEP-cable 4x0.25 mm²				
	 (probes with cable length > 2 m are available on request)				
Note:	for the connection to amplifier SZAb..., page 1.100-1.101				

-Probe | Device category 1G, 1G/2G and 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

Design	*G1/2*				
Dimensions					
Detection range [cm/s]	water 1...100 / oil 3...200				
Sensor length L [mm]	48	48	80	110	140
Connection	fixed cable	plug	fixed cable	fixed cable	fixed cable
ID-No.	P11186	P11187	P11188	P11189	P11190
Type	STS 110 K	STS 110 S	STS 110 K-L80	STS 110 K-L110	STS 110 K-L140
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20				
Certificate No.	T< V 98 ATEX 1298 X				
Ex marking	Gas: II 1 G Ex ia IIC T6...T3 Ga / II 1/2 G Ex ia IIC T6...T3 Ga/Gb Dust: II 1 D Ex ia IIIC T125 Da				
Ambient temperature and medium temperature [C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +85 T3: ñ20 ≤ Ta ≤ +85 Dust: ñ20 ≤ Ta ≤ +85				
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH				
Start-up time typ. [s]	8 (2...18)				
Reaction time typ. [s]	2 (1...13)				
Compressive strength [bar]	60				
Housing material	AISI 316 Ti ï different materials on request				
Protection [EN 60529]	IP 67				
Connection	...K: 2 m PUR-cable 4x0.25 mm² ...S: M12 connector				





Observe specific conditions for use in section "Technique and application" on page 1.13

Note:	for the connection to amplifier SZAb..., page 1.100-1.101

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Probe | Device category 1G, 1G/2G and 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

Extended temperature range up to 120 °C

Design	*G1/2*			
Dimensions				
Detection range [cm/s]	water 1...100 / oil 3...200			
Sensor length L [mm]	48	80	110	140
Connection	fixed cable	fixed cable	fixed cable	fixed cable
ID-No.	**P11414**	**P11415**	**P11416**	**P11417**
Type	STS 110 KH	STS 110 KH-L80	STS 110 KH-L110	STS 110 KH-L140
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20			
Certificate No.	T< V 98 ATEX 1298 X			
Ex marking	Gas: II 1 G Ex ia IIC T6...T3 Ga II 1/2 G Ex ia IIC T6...T3 Ga/Gb			
	Dust: II 1 D Ex ia IIIC T125 °C Da			
Ambient temperature and medium temperature [°C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +90 T3: ñ20 ≤ Ta ≤ +120			
	Dust: ñ20 ≤ Ta ≤ +85			
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH			
Start-up time typ. [s]	8 (2...18)			
Reaction time typ. [s]	2 (1...13)			
Compressive strength [bar]	60			
Housing material	AISI 316 Ti ï different materials on request			
Protection [EN 60529]	IP 67			
Connection	2 m FEP-cable 4x0.25 mm²			
				
	Observe specific conditions for use in section "Technique and application" on page 1.13			
Note:	for the connection to amplifier SZAb..., page 1.100-1.101			

-Probe | Device category 2G and 2D

-Device category 2G
Installation in Zone 1 (gas)

-Device category 2D
Installation in Zone 21 (dust)

Design	*G1/2*				
Dimensions					
Detection range [cm/s]	water 1...100 / oil 3...200				
Sensor length L [mm]	48	48	80	110	140
Connection	fixed cable	plug	fixed cable	fixed cable	fixed cable
ID-No.	**P11192**	**P11193**	**P11194**	**P11195**	**P11196**
Type	ST 110 K	ST 110 S	ST 110 K-L80	ST 110 K-L110	ST 110 K-L140
Ex area of use	Gas: Zone 1 / Dust: Zone 21				
Certificate No.	T< V 97 ATEX 1218				
Ex marking	Gas: II 2 G Ex ib IIC T6...T3 Gb				
	Dust: II 2 D Ex ib IIIC T125 Db				
Ambient temperature and medium temperature [C]	Gas: T6: ñ20 ≤ Ta ≤ +40				
	T5: ñ20 ≤ Ta ≤ +55				
	T4: ñ20 ≤ Ta ≤ +85				
	T3: ñ20 ≤ Ta ≤ +85				
	Dust: ñ20 ≤ Ta ≤ +85				
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH				
Start-up time typ. [s]	8 (2...18)				
Reaction time typ. [s]	2 (1...13)				
Compressive strength [bar]	60				
Housing material	AISI 316 Ti ï different materials on request				
Protection [EN 60529]	cable ...K: IP 67 / plug ...S: IP 67				
Connection	...K: 2 m PUR-cable 4x0.25 mm² / ...S: M12 connector				



1: BN
2: WH
3: BU
4: BK



(probes with cable length > 2 m are available on request)

Note: for the connection to amplifier SZAb..., page 1.100-1.101

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Probe | Device category 2G and 2D

-Device category 2G
Installation in Zone 1 (gas)

-Device category 2D
Installation in Zone 21 (dust)

Extended temperature range
up to 120 °C

Design	*G1/2*			
Dimensions				
Detection range [cm/s]	water 1...100 / oil 3...200			
Sensor length L [mm]	48	80	110	140
Connection	fixed cable	fixed cable	fixed cable	fixed cable
ID-No.	**P11198**	**P11200**	**P11201**	**P11202**
Type	ST 110 KH	ST 110 KH-L80	ST 110 KH-L110	ST 110 KH-L140
Ex area of use	Gas: Zone 1 / Dust: Zone 21			
Certificate No.	T< V 97 ATEX 1218			
Ex marking	Gas: II 2 G Ex ib IIC T6...T3 Gb			
	Dust: II 2 D Ex ib IIIC T125 °C Db			
Ambient temperature and medium temperature [°C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +90 T3: ñ20 ≤ Ta ≤ +120			
	Dust: ñ20 ≤ Ta ≤ +85			
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH			
Start-up time typ. [s]	8 (2...18)			
Reaction time typ. [s]	2 (1...13)			
Compressive strength [bar]	60			
Housing material	AISI 316 Ti ï different materials on request			
Protection [EN 60529]	IP 67			
Connection	2 m FEP-cable 4x0.25 mm²			
	 (probes with cable length > 2 m are available on request)			
Note:	for the connection to amplifier SZAb..., page 1.100-1.101			

-Probe | Device category 1G, 1G/2G and 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

With welded standard flange

Design	*DN25 / PN40 (EN 1092-1/05 A)*		
Dimensions	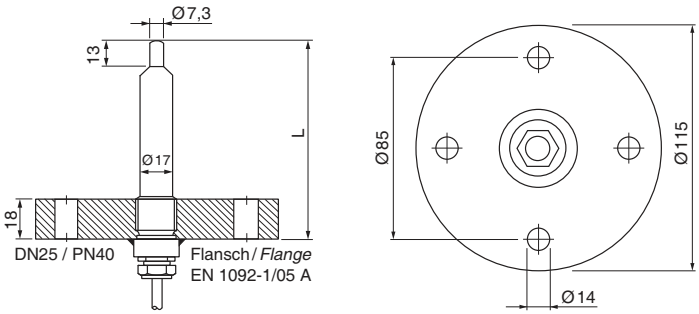		
Detection range [cm/s]	water 1...100 / oil 3...200		
Sensor length L [mm]	80	110	140
Connection	fixed cable	fixed cable	fixed cable
ID-No.	**P11191**	**P11148**	**P11149**
Type	STS 111 K-L80	STS 111 K-L110	STS 111 K-L140
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20		
Certificate No.	T< V 98 ATEX 1298 X		
Ex marking	Gas: II 1 G Ex ia IIC T6...T3 Ga / II 1/2 G Ex ia IIC T6...T3 Ga/Gb		
	Dust: II 1 D Ex ia IIIC T125 Da		
Ambient temperature and medium temperature [C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +85 T3: ñ20 ≤ Ta ≤ +85		
	Dust: ñ20 ≤ Ta ≤ +85		
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH		
Start-up time typ. [s]	8 (2...18)		
Reaction time typ. [s]	2 (1...13)		
Compressive strength [bar]	probe: 60 / flange: PN40		
Housing material	AISI 316 Ti ï different materials on request		
Protection [EN 60529]	IP 67		
Connection	2 m PUR-cable 4x0.25 mm²		
			
	Observe specific conditions for use in section "Technique and application" on page 1.13		
Note:	for the connection to amplifier SZAb..., page 1.100-1.101		

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Probe | Device category 1G, 1G/2G and 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

With welded standard flange
Extended temperature range up to 120 °C

Design	*DN25 / PN40 (EN 1092-1/05 A)*		
Dimensions	 		
Detection range [cm/s]	water 1...100 / oil 3...200		
Sensor length L [mm]	80	110	140
Connection	fixed cable	fixed cable	fixed cable
ID-No.	**P11418**	**P11419**	**P11420**
Type	STS 111 KH-L80	STS 111 KH-L110	STS 111 KH-L140
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20		
Certificate No.	T< V 98 ATEX 1298 X		
Ex marking	Gas: II 1 G Ex ia IIC T6...T3 Ga / II 1/2 G Ex ia IIC T6...T3 Ga/Gb Dust: II 1 D Ex ia IIIC T125 °C Da		
Ambient temperature and medium temperature [°C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +90 T3: ñ20 ≤ Ta ≤ +120 Dust: ñ20 ≤ Ta ≤ +85		
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH		
Start-up time typ. [s]	8 (2...18)		
Reaction time typ. [s]	2 (1...13)		
Compressive strength [bar]	probe: 60 / flange: PN40		
Housing material	AISI 316 Ti ï different materials on request		
Protection [EN 60529]	IP 67		
Connection	2 m FEP-cable 4x0.25 mm²		



Observe specific conditions for use in section "Technique and application" on page 1.13

Note:	for the connection to amplifier SZAb..., page 1.100-1.101

Ex-Probe | Device category 2G and 2D

Ex-Device category 2G
Installation in Zone 1 (gas)

Ex-Device category 2D
Installation in Zone 21 (dust)

With welded standard flange

Design	*DN25 / PN40 (EN 1092-1/05 A)*		
Dimensions	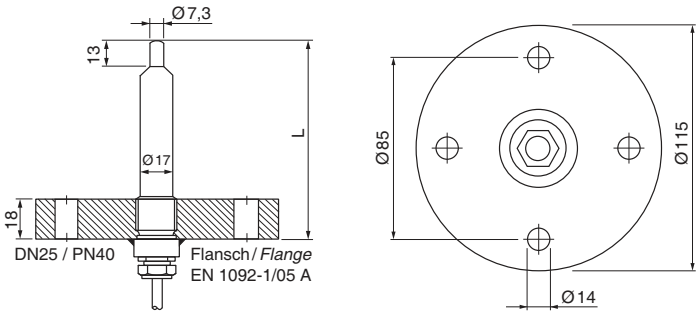		
Detection range [cm/s]	water 1...100 / oil 3...200		
Sensor length L [mm]	80	110	140
Connection	fixed cable	fixed cable	fixed cable
ID-No.	**P11197**	**P11150**	**P11151**
Type	ST 111 K-L80	ST 111 K-L110	ST 111 K-L140
Ex area of use	Gas: Zone 1 / Dust: Zone 21		
Certificate No.	T< V 97 ATEX 1218		
Ex marking	Gas: Ex II 2 G Ex ib IIC T6...T3 Gb		
	Dust: Ex II 2 D Ex ib IIIC T125 ℃ Db		
Ambient temperature and medium temperature [℃]	Gas: T6: ñ20 ≤ Ta ≤ +40		
	T5: ñ20 ≤ Ta ≤ +55		
	T4: ñ20 ≤ Ta ≤ +85		
	T3: ñ20 ≤ Ta ≤ +85		
	Dust: ñ20 ≤ Ta ≤ +85		
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH		
Start-up time typ. [s]	8 (2...18)		
Reaction time typ. [s]	2 (1...13)		
Compressive strength [bar]	60		
Housing material	AISI 316 Ti ï different materials on request		
Protection [EN 60529]	IP 67		
Connection	2 m PUR-cable 4x0.25 mm²		
			
	(probes with cable length > 2 m and different flanges are available on request)		
Note:	for the connection to amplifier SZAb..., page 1.100-1.101		

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Probe | Device category 2G and 2D

-Device category 2G
Installation in Zone 1 (gas)

-Device category 2D
Installation in Zone 21 (dust)

With welded standard flange

Extended temperature range up to 120 °C

Design	*DN25 / PN40 (EN 1092-1/05 A)*		
Dimensions	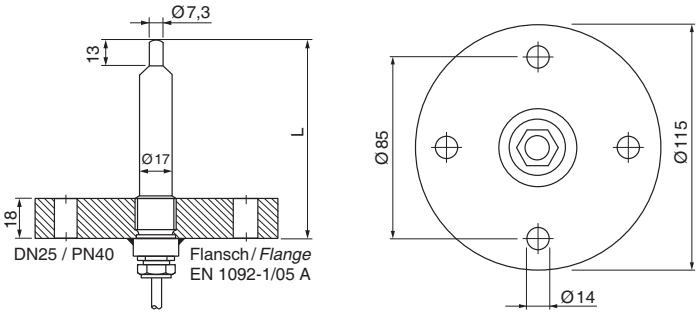		
Detection range [cm/s]	water 1...100 / oil 3...200		
Sensor length L [mm]	80	110	140
Connection	fixed cable	fixed cable	fixed cable
ID-No.	**P11203**	**P11204**	**P11205**
Type	ST 111 KH-L80	ST 111 KH-L110	ST 111 KH-L140
Ex area of use	Gas: Zone 1 / Dust: Zone 21		
Certificate No.	T< V 97 ATEX 1218		
Ex marking	Gas: II 2 G Ex ib IIC T6...T3 Gb		
	Dust: II 2 D Ex ib IIIC T125 °C Db		
Ambient temperature and medium temperature [°C]	Gas: T6: ñ20 ≤ Ta ≤ +40		
	T5: ñ20 ≤ Ta ≤ +55		
	T4: ñ20 ≤ Ta ≤ +90		
	T3: ñ20 ≤ Ta ≤ +120		
	Dust: ñ20 ≤ Ta ≤ +85		
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH		
Start-up time typ. [s]	8 (2...18)		
Reaction time typ. [s]	2 (1...13)		
Compressive strength [bar]	60		
Housing material	AISI 316 Ti ï different materials on request		
Protection [EN 60529]	IP 67		
Connection	2 m FEP-cable 4x0.25 mm²		
			
	(probes with cable length > 2 m and different flanges are available on request)		
Note:	for the connection to amplifier SZAb..., page 1.100-1.101		

-Probe | Device category 1G, 1G/2G and 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

Design	*G3/4*	*NPT3/4*
Dimensions		
Detection range [cm/s]	water 1...100 / oil 3...200	water 1...100 / oil 3...200
Sensor length [mm]	68	68
Connection	terminal clamps	terminal clamps
ID-No.	**P11268**	**P11269**
Type	STSEX 01	STSEX 02
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20	
Certificate No.	T< V 98 ATEX 1298 X	
Ex marking	Gas: II 1 G Ex ia IIC T6...T3 Ga / II 1/2 G Ex ia IIC T6...T3 Ga/Gb Dust: II 1 D Ex ia IIIC T125 Da	
Umgebungstemperatur und Mediumtemperatur [C]	Gas: T6: ñ20 ≤ Ta ≤ +40 T5: ñ20 ≤ Ta ≤ +55 T4: ñ20 ≤ Ta ≤ +85 T3: ñ20 ≤ Ta ≤ +85 Dust: ñ20 ≤ Ta ≤ +85	
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH	
Start-up time typ. [s]	8 (2...18)	
Reaction time typ. [s]	2 (1...13)	
Cable gland [mm]	clamping range 5.5...8.5	
Housing material	AISI 316 Ti ï different materials on request	
Protection [EN 60529]	IP 67	
Connection cable	2 m PVC 4x0.75 mm² (number 1-4)	
	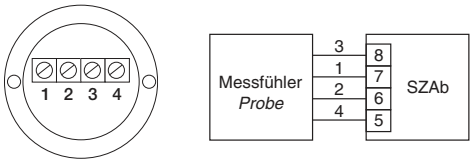	
	Observe specific conditions for use in section "Technique and application" on page 1.13	
Note:	for the connection to amplifier SZAb..., page 1.100-1.101	

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Probe | Device category 1G, 1G/2G and 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

Design	*G1/2*	
Dimensions		
Detection range [m/s]	air 2...25	air 2...25
Sensor length [mm]	65	65
Connection	fixed cable	plug
ID-No.	**P11152**	**P11206**
Type	STS 212 K	STS 212 S
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20	
Certificate No.	T< V 98 ATEX 1298 X	
Ex marking	Gas: II 1 G Ex ia IIC T4...T3 Ga / II 1/2 G Ex ia IIC T4...T3 Ga/Gb Dust: II 1 D Ex ia IIIC T145 Da	
Ambient temperature and medium temperature [C]	Gas: T4: ñ20 ≤ Ta ≤ +70 T3: ñ20 ≤ Ta ≤ +85 Dust: ñ20 ≤ Ta ≤ +85	
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH	
Start-up time typ. [s]	10...40	
Reaction time typ. [s]	5 (2...30)	
Compressive strength [bar]	10	
Housing material	AISI 316 Ti ï different materials on request	
Protection [EN 60529]	IP 67	
Connection	2 m PUR-cable 4x0.25 mm²	M12 connector



1: BN
2: WH
3: BU
4: BK



Observe specific conditions for use in section "Technique and application" on page 1.13

Note:	for the connection to amplifier SZAb..., page 1.100-1.101

-Probe | Device category 1G, 1G/2G and 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

Design	*G1/2*	
Dimensions		
Detection range [m/s]	air 2...25	air 2...25
Sensor length [mm]	48	48
Connection	fixed cable	plug
ID-No.	**P11153**	**P11207**
Type	STS 215 K	STS 215 S
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20	
Certificate No.	T< V 98 ATEX 1298 X	
Ex marking	Gas: II 1 G Ex ia IIC T6...T3 Ga / II 1/2 G Ex ia IIC T6...T3 Ga/Gb Dust: II 1 D Ex ia IIIC T130 Da	
Ambient temperature and medium temperature [°C]	Gas: T6: ñ20 ≤ Ta ≤ +35 T5: ñ20 ≤ Ta ≤ +50 T4: ñ20 ≤ Ta ≤ +85 T3: ñ20 ≤ Ta ≤ +85 Dust: ñ20 ≤ Ta ≤ +85	
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH	
Start-up time typ. [s]	5...20	
Reaction time typ. [s]	3 (2...30)	
Compressive strength [bar]	10	
Housing material	AISI 316 Ti ï different materials on request	
Protection [EN 60529]	IP 67	
Connection	2 m PUR-cable 4x0.25 mm²	M12 connector





Observe specific conditions for use in section "Technique and application" on page 1.13

Note:	for the connection to amplifier SZAb..., page 1.100-1.101

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Probe | Device category 1G, 1G/2G and 1D

-Device category 1G
Installation in Zone 0 (gas)

-Device category 1G/2G
Installation in partition wall
Zone 0 / Zone 1 (gas)

-Device category 1D
Installation in Zone 20 (dust)

Extended temperature range up to 120 °C

Design	*G1/2*
Dimensions	
Detection range [m/s]	air 2...25
Sensor length [mm]	48
Connection	fixed cable
ID-No.	**P11212**
Type	STS 215 KH
Ex area of use	Gas: Zone 0, Partition wall Zone 0 / Zone 1 / Dust: Zone 20
Certificate No.	T< V 98 ATEX 1298 X
Ex marking	Gas: II 1 G Ex ia IIC T6...T3 Ga II 1/2 G Ex ia IIC T6...T3 Ga/Gb Dust: II 1 D Ex ia IIIC T130 °C Da
Ambient temperature and medium temperature [°C]	Gas: T6: ñ20 ≤ Ta ≤ +35 T5: ñ20 ≤ Ta ≤ +50 T4: ñ20 ≤ Ta ≤ +85 T3: ñ20 ≤ Ta ≤ +120 Dust: ñ20 ≤ Ta ≤ +85
Maximum values	Ui = 13.65 V / Ii = 200 mA / Pi = 0.69 W / Ci = 0.45 nF / Li = 1.80 µH
Start-up time typ. [s]	5...20
Reaction time typ. [s]	3 (2...30)
Compressive strength [bar]	10
Housing material	AISI 316 Ti ï different materials on request
Protection [EN 60529]	IP 67
Connection	2 m FEP-cable 4x0.25 mm²
	
	Observe specific conditions for use in section "Technique and application" on page 1.13
Note:	for the connection to amplifier SZAb..., page 1.100-1.101

-Amplifiers AC/DC | Relay

II (1) G [Ex ia Ga] IIC
II (1) D [Ex ia Da] IIIC

AC 230 V ï AC 115 V ï DC 24 V

Relay output

Cable break and short circuit monitoring

Turn off delay

Design	*SZAb 400 EX...*		
Dimensions			
ID-No.	**P11400**	**P11399**	**P11398**
Type	SZAb 400 EX-WR230	SZAb 400 EX-WR115	SZAb 400 EX-GR
Output	Relay	Relay	Relay
Supply voltage [V]	230 AC ±10%	115 AC ±10%	24 DC ±15%
Ex marking	Gas: II (1) G [Ex ia Ga] IIC	Dust: II (1) D [Ex ia Da] IIIC	
Certificate No.	EPS 19 ATEX 1 009	IECEx EPS 19.0001	
Maximum values	Uo = 13.65 V Io = 200 mA Po = 683 mW IIC: Co = 0.35 µF; Lo = 1.1 mH IIB: Co = 1.8 µF; Lo = 6.2 mH IIA: Co = 5.7 µF; Lo = 11.0 mH		
Turn off delay [s]	0...25		
Output	relay / change-over		
Switching voltage [V]	250 AC / 60 DC / 24 DC		
Switching current [A]	4 AC / 0.8 DC / 4 DC		
Switching power	cos φ >0,7 / L/R <200 ms		
Ambient temperature [C]	ñ20 ≤ Ta ≤ +60		
Protection [EN 60529]	IP 20		
Connection	terminal screws		

Note:
The Ex-amplifier must be mounted outside hazardous areas (gas or dust).

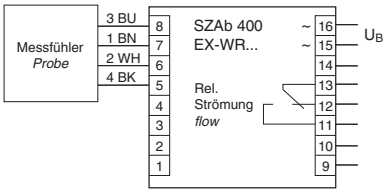

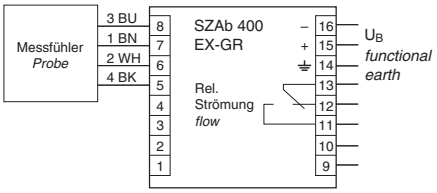

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Amplifier DC | Analog

II (1) G [Ex ia Ga] IIC
II (1) D [Ex ia Da] IIIC

DC 24 V

Analog output

Cable break and short circuit monitoring

Design	*SZAb 400 EX-GA*
Dimensions	
ID-No.	**P11401**
Type	SZAb 400 EX-GA
Output	4...20 mA
Supply voltage [V]	24 DC ±15%
Ex marking	Gas: II (1) G [Ex ia Ga] IIC Staub: II (1) D [Ex ia Da] IIIC
Certificate No.	EPS 19 ATEX 1 009 IECEx EPS 19.0001
Maximum values	Uo = 13.65 V Io = 200 mA Po = 683 mW IIC: Co = 0.35 µF; Lo = 1.1 mH IIB: Co = 1.8 µF; Lo = 6.2 mH IIA: Co = 5.7 µF; Lo = 11.0 mH
Output	analog, non linear
Current output [mA]	4...20
Load R_L [Ω]	0...500
Ambient temperature [°C]	ñ20 ≤ Ta ≤ +60
Protection [EN 60529]	IP 20
Connection	terminal screws

Note:
The Ex-amplifier must be mounted outside hazardous areas (gas or dust).

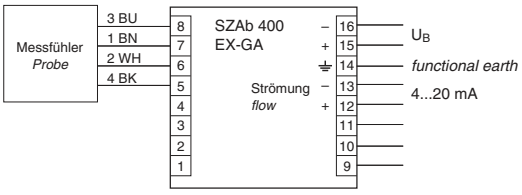

-Compact model | Device category 3G and 3D

-Device category 3G
Installation in Zone 2 (gas)

-Device category 3D
Installation in Zone 22 (dust)

DC 24 V

PNP output

Design	*M18x1*

Dimensions

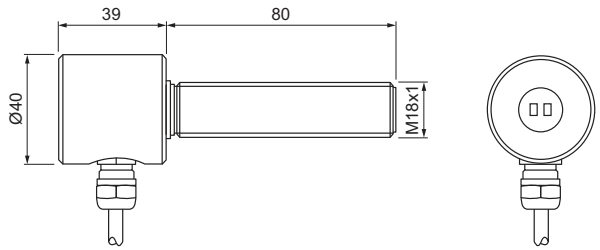

Detection range [m/s]		gaseous media 0.5...20
Sensor length L [mm]		80
Output		PNP
ID-No.		**P11404**
Type		LC 518 GSP-Ex22
Ex area of use		Gas: Zone 2 / Dust: Zone 22
Certificate of conformity		EGE 20.0010 X
Ex marking	Gas:	II 3 G Ex ic mc IIC T4...T3 Gc
	Dust:	II 3 D Ex ic mc IIIC T135 Dc
Ambient temperature and medium temperature [°C]	Gas:	T3, T4: ñ10 ≤ Ta ≤ +60
	Dust:	ñ10 ≤ Ta ≤ +60
Supply voltage [V]		24 DC ±10%
Current consumption [mA]		≤ 35
Switching current [mA]		≤ 200
Start-up time typ. [s]		20
Reaction time typ. [s]		< 5
Compressive strength [bar]		1
Housing material		AISI 316 Ti, PBT-GF30, PUR, ceramic AL_2O_3
Display flow		three-colour-illuminated dot red/yellow/green
Protection [EN 60529]		IP 67
Connection		2 m PUR-cable 3x0.5 mm²



EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Compact model | Device category 3G and 3D

-Device category 3G
Installation in Zone 2 (gas)

-Device category 3D
Installation in Zone 22 (dust)

DC 24 V

Analog output

Design	*M18x1*	
Dimensions	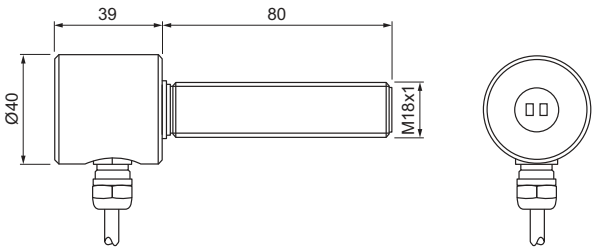	
Detection range [m/s]	gaseous media 0.5...20	
Sensor length L [mm]	80	
Output	4...20 mA, non linear	
ID-No.	**P11421**	
Type	LC 518 GA-Ex22	
Ex area of use	Gas: Zone 2 / Dust: Zone 22	
Certificate of conformity	EGE 20.0010 X	
Ex marking	Gas:	II 3 G Ex ic mc IIC T4...T3 Gc
	Dust:	II 3 D Ex ic mc IIIC T135 Dc
Ambient temperature [°C]	Gas:	T3, T4: ñ10 ≤ Ta ≤ +60
and medium temperature	Dust:	ñ10 ≤ Ta ≤ +60
Supply voltage [V]	24 DC ±10%	
Current consumption [mA]	≤ 35	
Current output [mA]	4...20	
Start-up time typ. [s]	20	
Reaction time typ. [s]	< 5	
Compressive strength [bar]	1	
Housing material	AISI 316 Ti, PBT-GF30, PUR, ceramic AL_2O_3	
Display flow	two-colour-illuminated dot red/green	
Protection [EN 60529]	IP 67	
Connection	2 m PUR-cable 3x0.5 mm²	
		

-Compact model | Device category 3G and 3D

-Device category 3G
Installation in Zone 2 (gas)

-Device category 3D
Installation in Zone 22 (dust)

DC 24 V

PNP output

Design	*G1/2*			
Dimensions	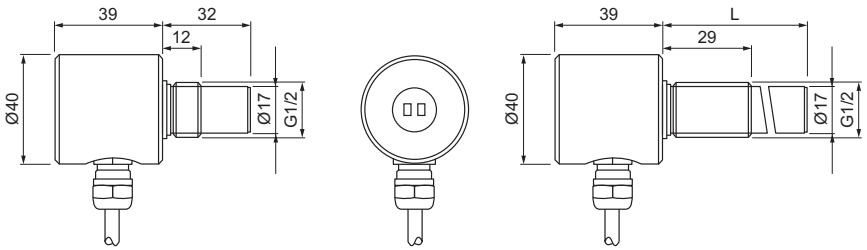			
Detection range [m/s]	gaseous media 0.5...20			
Sensor length L [mm]	32	49	101	151
Output	PNP			
ID-No.	**P11405**	**P11406**	**P11407**	**P11408**
Type	LC 521 GSP-Ex22	LC 521/1 GSP-Ex22	LC 521/2 GSP-Ex22	LC 521/3 GSP-Ex22
Ex area of use	Gas: Zone 2 / Dust: Zone 22			
Certificate of conformity	EGE 20.0010 X			
Ex marking	Gas: II 3 G Ex ic mc IIC T4...T3 Gc Dust: II 3 D Ex ic mc IIIC T135 Dc			
Ambient temperature and medium temperature [°C]	Gas: T3, T4: ñ10 ≤ Ta ≤ +60 Dust: ñ10 ≤ Ta ≤ +60			
Supply voltage [V]	24 DC ±10%			
Current consumption [mA]	≤ 35			
Switching current [mA]	≤ 200			
Start-up time typ. [s]	20			
Reaction time typ. [s]	< 5			
Compressive strength [bar]	1			
Housing material	AISI 316 Ti, PBT-GF30, PUR, ceramic AL_2O_3			
Display flow	three-colour-illuminated dot red/yellow/green			
Protection [EN 60529]	IP 67			
Connection	2 m PUR-cable 3x0.5 mm²			
				

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

-Compact model | Device category 3G and 3D

-Device category 3G
Installation in Zone 2 (gas)

-Device category 3D
Installation in Zone 22 (dust)

DC 24 V

Analog output

Design	*G1/2*			
Dimensions	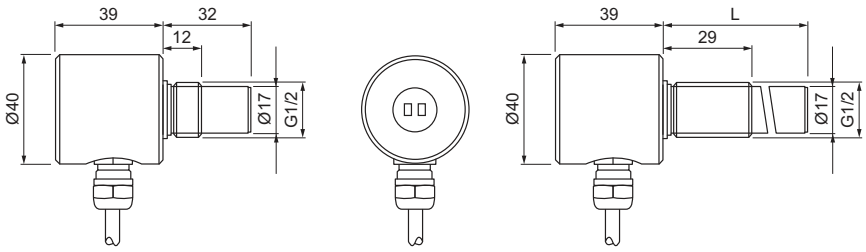			
Detection range [m/s]	gaseous media 0.5...20			
Sensor length L [mm]	32	49	101	151
Output	4...20 mA, non linear			
ID-No.	**P11422**	**P11423**	**P11424**	**P11425**
Type	LC 521 GA-Ex22	LC 521/1 GA-Ex22	LC 521/2 GA-Ex22	LC 521/3 GA-Ex22
Ex area of use	Gas: Zone 2 / Dust: Zone 22			
Certificate of conformity	EGE 20.0010 X			
Ex marking	Gas: II 3 G Ex ic mc IIC T4...T3 Gc			
	Dust: II 3 D Ex ic mc IIIC T135 Dc			
Ambient temperature and medium temperature [°C]	Gas: T3, T4: -10 ≤ Ta ≤ +60			
	Dust: -10 ≤ Ta ≤ +60			
Supply voltage [V]	24 DC ±10%			
Current consumption [mA]	≤ 35			
Current output [mA]	4...20			
Start-up time typ. [s]	20			
Reaction time typ. [s]	< 5			
Compressive strength [bar]	1			
Housing material	AISI 316 Ti, PBT-GF30, PUR, ceramic AL_2O_3			
Display flow	two-colour-illuminated dot red/green			
Protection [EN 60529]	IP 67			
Connection	2 m PUR-cable 3x0.5 mm²			
				

Accessories | IO-Link Converter

IO-Link update for sensors with analog output

Reduction of interference-prone analog signals

Integrated sensor monitoring

Adjustable switch-off function in case of overload

Use IO-Link
Universal · Smart · Easy

Design	*IO-Link Converter*
Dimensions	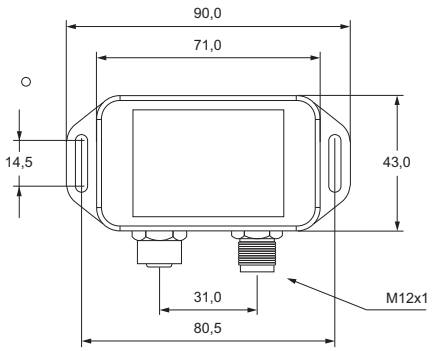
ID-No.	**Z01297**
Type	IOL-KONV-UIS-01
Input 1	4..20 mA, 0...10 V, switching signal
Input 2	4..20 mA, 0...10 V, switching signal
	/ IO-Link /
Output S1	PNP-NO/NC, IO-Link
Output S2	Analog output, 4...20 mA
Supply voltage [V]	18...30 DC
Current consumption [mA]	≤ 37 (max.)
Switching current [mA]	≤ 150
Ambient temperature [°C]	-10...+60
Resolution	16 bit
Programmable functions	Operating modes: hysteresis function, window function, error monitoring, selections of input: 4...20 mA, 0...10 V, switching signal
Housing material	PC
Protection [EN 60529]	IP 67
Connection	M12 connector
Accessories	IOL-Master-Set V1.1, page 1.107 (not in scope of delivery)

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Accessories | IO-Link-Master

Parametrization of IO-Link-devices

Version 1.1 - Universally usable

Easy configurable software

Use IO-Link
Universal · Smart · Easy

Design	USB

Dimensions

1: mini USB
2: LED operating state / fault display
3: 24 V DC ÿ 5.5 / 2.1 mm
4: M12 type A connector

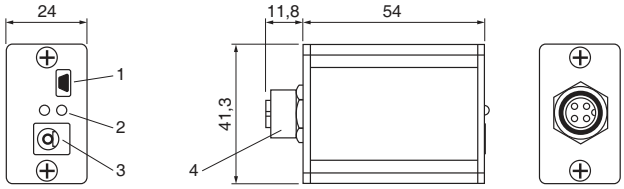

Application area		parametrization of devices with IO-Link-functions and monitoring of process data
Communications protocol		COM 1 (4.8 kBit/s), COM 2 (38.4 kBit/s), COM 3 (230 kBit/s)
Related software		Port and Device Configuration Tool [1]
Output		IO-Link
ID-No.		**Z01216**
Type		IO-Link-USB-Master-Set v1.1
Input voltage	[V]	USB: 5 DC / external power supply: 24 DC (EN 60950)
Input current	[mA]	USB: < 500 / external power supply: < 600
Output voltage	[V]	USB: 24 DC / external power supply: see input voltage
Output current	[mA]	USB: < 65 / external power supply: < 500
LED displays		
Green		continuous: Master ready for operation, flashes: IO-Link-communication active
Red		continuous and green LED off: fault
Material		aluminium, eloxed
Protection	[EN 60529]	IP 20
Connection		M12 connector / type A / socket

[1] Download of iqPDCT-software from www.iq2-development.de/downloads.

1: +24 V
2: not used
3: GND
4: IO-Link: CH1 (C/Q)
5: not used





1: +5 V
2: D ñ
3: D +
4: not used
5: GND

Accessories (incl. at delivery)	USB-connecting cable, M12-sensor-connecting cable 2 m, power supply 230 V AC / 24 V DC

Accessories | M12 connector

Finished cable plug housing
Self locking screw plug
Protection IP 67

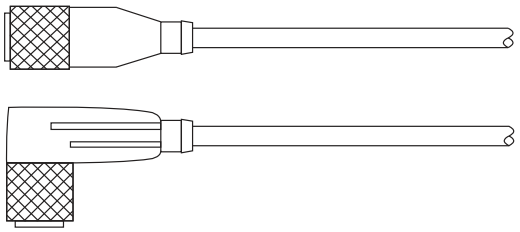

Cable plug housing



SLGÖ ***SLWÖ***

Pin-assignment

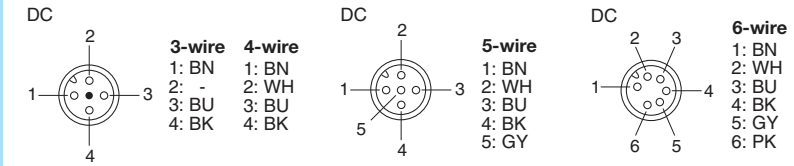

DC

TYPE	*ID-NO.*	*DESIGN*	
SLG 3-2	Z01076	Cable plug housing straight, 2 m cable 3x0.34 mm²	max. 250 V / 4 A
SLG 3-5	Z01077	Cable plug housing straight, 5 m cable 3x0.34 mm²	max. 250 V / 4 A
SLW 3-2	Z01078	Cable plug housing angular, 2 m cable 3x0.34 mm²	max. 250 V / 4 A
SLW 3-5	Z01079	Cable plug housing angular, 5 m cable 3x0.34 mm²	max. 250 V / 4 A
SLW 3-2-LED	Z00052	Cable plug housing angular, 2 m cable 3x0.34 mm²	max. 250 V / 4 A PNP with LED
SLG 4-2	Z00445	Cable plug housing straight, 2 m cable 4x0.25 mm²	max. 250 V / 4 A
SLG 4-5	Z00449	Cable plug housing straight, 5 m cable 4x0.25 mm²	max. 250 V / 4 A
SLW 4-2	Z00446	Cable plug housing angular, 2 m cable 4x0.25 mm²	max. 250 V / 4 A
SLW 4-5	Z00450	Cable plug housing angular, 5 m cable 4x0.25 mm²	max. 250 V / 4 A
SLW 4-2-LED	Z01157	Cable plug housing angular, 2 m cable 4x0.25 mm²	max. 250 V / 4 A PNP with LED
SLG 5-2	Z01150	Cable plug housing straight, 2 m cable 5x0.34 mm²	max. 60 V / 2 A
SLW 5-2	Z01151	Cable plug housing angular, 2 m cable 5x0.34 mm²	max. 60 V / 2 A
SLG 6-2	Z01197	Cable plug housing straight, 2 m cable 6x0.25 mm²	max. 36 V / 2 A
SLW 6-2	Z01198	Cable plug housing angular, 2 m cable 6x0.25 mm²	max. 36 V / 2 A

DATA

Thread	M12x1	Contact resistance	≤ 5 mΩ
Material	PVC	Insulation resistance	>10⁹
Protection	IP 67	Testing voltage	2.0 KV eff. / 5 and 6 pol. 1.5 KV eff.
Temperature range	ñ25...+80 °C		

Note:

The cable plug housings are fitted with a sealing ring and can be used in temperature range of ñ25 °C...+80 °C. Sensors with DC-NC/NO output (antivalent) are connected to 4-pole cable plug housings (4x0,25 mm²). In this case, the NC output is connected to the white lead (connection 2).

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Accessories | M12 connector

Cable plug user-assembled
Great variety of cables
Protection IP 67

Cable plug housing straight



SBGÖ

Cable plug housing angular



SBWÖ



SBG.../SBW...



SBG 5.../SBW 5...

TYPE	*ID-NO.*	*DESIGN*	
SBG-DC	Z01060	DC-Cable plug housing M12x1, straigth 4-pol	user assembled 30 VDC, 3 A
SBW-DC	Z00038	DC-Cable plug housing M12x1, angular 4-pol	user assembled 30 VDC, 3 A
SBG 5-DC	Z01146	DC-Cable plug housing M12x1, straigth 5-pol	user assembled 30 VDC, 1 A
SBW 5-DC	Z01147	DC-Cable plug housing M12x1, angular 5-pol	user assembled 30 VDC, 1 A
PREFERRED CABLE			
PVC 205	Z01061	PVC-cable 2x0.5 mm²	Lead colour coding: BN/BU
PVC 205B	Z01062	PVC-cable 2x0.5 mm², blue cable covering	Lead colour coding: BN/BU
PVC 305	Z01063	PVC-cable 3x0.5 mm²	Lead colour coding: BN/BU/BK
PVC 434	Z01066	PVC-cable 4x0.34 mm²	Lead colour coding: BN/BU/BK/WH
PVC 405	Z01067	PVC-cable 4x0.5 mm²	Lead colour coding: BN/BU/BK/WH
PVC 505	Z01116	PVC-cable 5x0.5 mm²	Lead colour coding: BN/BU/BK/WH/GY
PUR 425S	Z01069	PUR-cable 4x0.25 mm², shielded	Lead colour coding: BN/BU/BK/WH
PUR 425BS	Z01070	PUR-cable 4x0.25 mm², shielded, blue cable covering	Lead colour coding: BN/BU/BK/WH
	Z01074	Finishing of cable plug housing	
	Z01075	Finishing of cable plug housing and cable extremity	

Note

Different cables on request.

Code: BK = black BN = brown BU = blue GN = green YE = yellow GY = grey PK = pink WH = white

Accessories | Cable

TYPE	ID-NO.	MATERIAL/SHEAT	ÿ A [mm]*	WIRE SPECIFICATION	COLOUR
PVC205	Z01061	PVC, grey	5.2	2x0.5 mm²	BU, BN
PVC205B	Z01062	PVC, blue	5.1	2x0.5 mm²	BU, BN
PVC275	Z01086	PVC, grey	6.0	2x0.75 mm²	BU, BN
PVC275BS	Z01108	PVC, blue	6.3	2x0.75 mm² shielded	numbered cable
PVC334	Z01109	PVC, grey	4.5	3x0.34 mm²	BU, BN, BK
PVC305E	Z01064	PVC, grey	5.2	3x0.5 mm²	BU, BN, GN/YE
PVC305	Z01063	PVC, grey	5.2	3x0.5 mm²	BU, BN, BK
PVC305B	Z01167	PVC, blue	5.2	3x0.5 mm²	BU, BN, BK
PVC375	Z01065	PVC, grey	6.0	3x0.75 mm²	numbered cable
PVC375E	Z01111	PVC, grey	6.0	3x0.75 mm²	BU, BN,GN/YE
PVC425	Z01110	PVC, grey	4.3	4x0.25 mm²	BU, BN, BK, WH
PVC434	Z01066	PVC, grey	4.5	4x0.34 mm²	BU, BN, BK, WH
PVC405	Z01067	PVC, grey	5.5	4x0.5 mm²	BU, BN, BK, WH
PVC475E	Z01113	PVC, grey	6.5	4x0.75 mm²	BU, BN, BK, GN/YE
PVC475BS	Z01114	PVC, blue	7.3	4x0.75 mm² shielded	numbered cable
PVC505	Z01116	PVC, grey	5.8	5x0.5 mm²	BU, BN, WH, BK, GY
PVC705	Z01117	PVC, grey	6.6	7x0.5 mm²	BU, BN, WH, GN,YE, GY, PK
PUR334	Z01156	PUR, grey	5.0	3x0.34 mm²	BU, BN, BK
PUR375	Z01068	PUR, black	6.0	3x0.75 mm² ñ40Œ	BU, BN, BK
PUR425S	Z01069	PUR, grey	5.0	4x0.25 mm² shielded	BU, BN, WH, BK
PUR425BS	Z01070	PUR, blue	5.0	4x0.25 mm² shielded	BU, BN, WH, BK
PUR405	Z01112	PUR, black	5.0	4x0.5 mm²	BU, BN, WH, BK
PUR405BS	Z01173	PUR, blue	6.2	4x0.5 mm² shielded	BU, BN, WH, BK
PUR475SE	Z01118	PUR, grey	9.0	4x0.75 mm² shielded	numbered cable
PUR410E	Z01119	PUR, orange	8.0	4x1.0 mm²	BU, BN, BK, GN/YE
FEP375S	Z01126	FEP, red	5.0	3x0.75 mm² shielded	BU, BN, BK
FEP334	Z01071	FEP, red	3.8	3x0.34 mm²	BU, BN, BK
FEP425S	Z01073	FEP, red	4.1	4x0.25 mm² shielded	BU, BN, BK, WH
FEP425	Z01072	FEP, red	3.7	4x0.25 mm²	BU, BN, BK, WH
FEP425BS	Z01125	FEP, blue	4.1	4x0.25 mm² shielded	BU, BN, BK, WH
FEP375	Z01165	FEP, red	4.2	3x0.75 mm²	BU, BN, GN/YE
Silikon375E	Z01121	Silicone, red	6.0	3x0.75 mm²	BU, BN, GN/YE
Silikon475E	Z01122	Silicone, red	6.3	4x0.75 mm²	BU, BN, BK, GN/YE
Silikon475SE	Z01115	Silicone, red	8.8	4x0.75 mm² shielded	BU, BN, BK, GN/YE
Silikon305	Z01143	Silicone, red	5.5	3x0.5 mm²	BU, BN, BK
PVC705SE	Z01123	PVC-transparent	9.2	7x0.5 mm² shielded	numbered cable, GN/YE

*Tolerance of diameter ±0,4 mm

Code: BK = black BN = brown BU = blue GN = green YE = yellow GY = grey PK = pink WH = white

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Accessories | Product section 1

TYPE	ID-NO. DIMENSIONS	DESIGN
Flange - ÿ 20	Z01106 	Plastic - flange with drilled hole ÿ 20 mm for sensors type LN 520
Flange DN25/PN40	Z01001 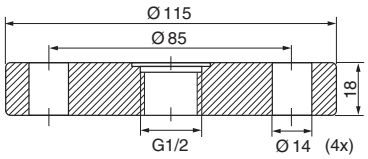	Flange AISI 316 Ti (1.4571) EN 1092-1/05 A (DIN 2527) with central thread G1/2 for sensors type STÖ with G1/2
A501	Z01033 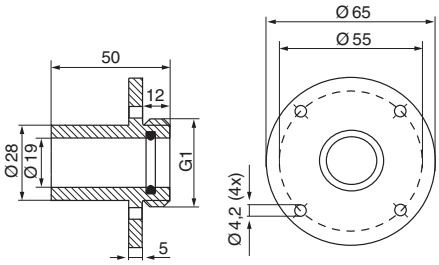	Thread sleeve of brass, nickel-plated L=50 mm, G1 for sensors type LNÖ
A502	Z01034 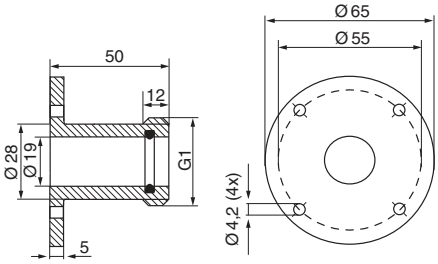	Thread sleeve of brass, nickel-plated L=50 mm, G1 for sensors type LNÖ
A503	Z01035 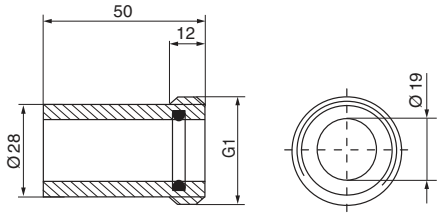	Welding sleeve of FE 360 B (1.0037), L=50 mm, G1 for sensors type LNÖ

Accessories | Product section 1

TYPE	ID-NO. DIMENSIONS	DESIGN
SIA G1/4 - 1/4 - 1/4	Z01018 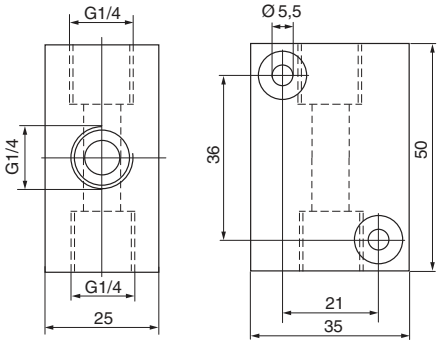	Adapter for G1/4-sensors with G1/4-pipe connections Material: AISI 316 Ti Sensors: STK 412... Massflow down to 10 ml/min (additional models on request)
SDA-SCS-G1/4	Z01200 L = 39 mm 	Screw-in adapter G1/4 for flow sensors SCS, SNS, SNTS and ST418 Material: AISI 316 Ti
SDA-SCS-G1/2 SDA-SCS-G1/2-L37	Z01201 L = 30 mm Z01208 L = 37 mm 	Screw-in adapter G1/2 for flow sensors SCS, SNS, SNTS and ST418 Material: AISI 316 Ti
SDA G1/4-ÿ 10-L050	Z01175 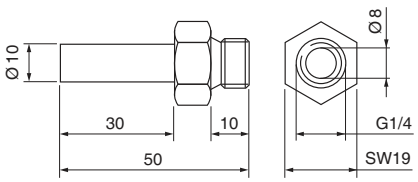	Adapter G1/4 for flow sensors inline-digital display SDN 5.../1..., SDV 652..., SDI 852/1...
SDA G1/2-ÿ 18-L068	Z01176 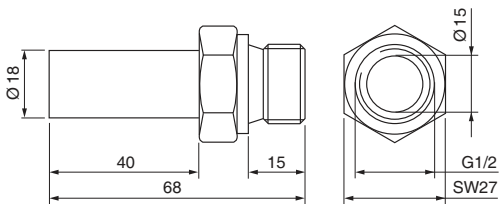	Adapter G1/2 for flow sensors inline-digital display SDN 552/3...

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Notes

Notes

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 (0)4346 / 41580 . ege-elektronik.com

Process Sensors

Level sensors

- For level monitoring ø 30...+230 °C
- Steam proof at a pressure of up to 30 bar
- For hot motor oil
- For liquid nitrogen
- For chemically aggressive media

Ultrasonic sensors

- Switching distance up to 6000 mm
- Level monitoring
- Watertight housing
- Teach-in functions

Pressure sensors

- Monitoring in pipes and containers
- Pressure up to 16 bar
- Level up to 10 m (±1 cm)
- Compact models
- Programmable

Temperature sensors

- Monitoring in pipes and containers
- Temperature ñ40...+120 °C (±0,3 °C)
- Pressure up to 100 bar
- Compact models
- Multi use output NO/NC + analog

Infrared detectors

- Measurement of temperature
- Monitoring of hot media
- Position control

Metal detectors

- Detection of metal parts
- For harsh environment
- Large sensing range up to 400 mm
- Monitoring of bulk materials
- Machine protection

Sales partners, wholesalers and representatives

ARGENTINA, Lomas de Zamora
AUSTRALIA, Warabrook NSW 2304
AUSTRIA, Wien
BELGIUM, Aalst
BRAZIL, Sao Paulo
CANADA, Oldcastle ñ Ontario
CHINA, Shanghai
COLOMBIA, Bogota D.C.
CZECH REPUBLIC, Ostrava
DENMARK, Aabenraa
ESTONIA, Tallinn
FINLAND, Jyv%&kyl‰
FRANCE, Nanteuil les Meaux
GREECE, Sindos - Thessaloniki
GREAT BRITAIN, Staffordshire
HUNGARY, Budapest
INDIA, Mumbai
IRELAND, Clane, Co. Kildare
ISRAEL, Tel-Aviv
ITALY, Carate Brianza (MI)
JAPAN, Tokyo
NAMIBIA, Windhoek
NETHERLANDS, LG Dordrecht
NEW ZEALAND, Greenmount, Auckland
NORWAY, KolsÂs
PHILIPPINES, Taguig City
POLAND, Jezow Sudecki
POLAND, Katowice
RUSSIAN FEDERATION, Moscow
PORTUGAL, Porto
ROMANIA, Bucharest
SINGAPORE, Singapore
SLOVAKIA, Bansk· Bystrica
SLOVENIA, Ljubljana - Crnuce
SOUTH AFRICA, Cleveland
SOUTH KOREA, Gwangmyeongsi, Gyeonggi-do
SPAIN, Nigran
SWEDEN, BorÂs
SWITZERLAND, Uster
TAIWAN, New Taipeh City
TURKEY, Kurtk^ y / Pendik / Istanbul
USA, Gastonia
VIETNAM, Ho Chi Minh City

https://ege-elektronik.com/en/organisation/ege/

We look forward to your enquiry.
Please contact us!

EGE-Elektronik
Spezial-Sensoren GmbH
Ravensberg 34 ï 24214 Gettorf ï Germany
T +49 (0) 4346-41580 **F** +49 (0) 4346-5658
info@ege-elektronik.com
ege-elektronik.com

E10323